



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Model 3000-2xxxx

Microwave Relay Carrier

90400340



All technical data and specifications in this publication are subject to change without prior notice and do not represent a commitment on the part of Giga-tronics, Incorporated.

© 2011 Giga-tronics Incorporated. All rights reserved. Printed in the U.S.A.

Warranty

Giga-tronics Series 3000 Switching Modules are warranted against defective materials and workmanship for three years from date of shipment, or as detailed in the warranty section of this manual. Giga-tronics will, at its option, repair or replace products that are proven defective during the warranty period. This warranty DOES NOT cover damage resulting from improper use, nor workmanship other than Giga-tronics service. There is no implied warranty of fitness for a particular purpose, nor is Giga-tronics liable for any consequential damages. Specification and price change privileges are reserved by Giga-tronics.

CONTACT INFORMATION

Giga-tronics, Incorporated

4650 Norris Canyon Road

San Ramon, California 94583

Telephone: 800.726.4442 (only within the United States)

925.328.4650

Fax: 925.328.4700

On the Internet: www.gigatronics.com

Regulatory compliance information

This product complies with the essential requirements of the following applicable European Directives, and carries the CE mark accordingly.

89/336/EEC and 73/23/EEC

EN61010-1 (1993)

EN61326-1 (1997)

Manufacturer's Name:

Giga-tronics, Incorporated

EMC Directive and Low Voltage Directive

Electrical Safety

EMC – Emissions and Immunity

Manufacturer's Address

4650 Norris Canyon Road
San Ramon, California 94583
U.S.A.

Type of Equipment:

Switching Module

Model Series Number

3000-2xxxx

Declaration of Conformity on file. Contact Giga-tronics at the following;

Giga-tronics, Incorporated

4650 Norris Canyon Road

San Ramon, California 94583

Telephone: 800.726.4442 (only within the United States)

925.328.4650

Fax: 925.328.4700

Record of Changes to This Manual

Use the table below to maintain a permanent record of changes to this document. Corrected replacement pages are issued as Technical Publication Change Instructions (TPCI). When you are issued a TPCI, do the following:

1. Insert the TPCI at the front of the manual binder.
2. Remove the pages from the manual binder that are noted in the TPCI.
3. Replace the page(s) removed in the previous step with the corrected page(s).
4. Record the changes in the table below.

TPCI Number	TPCI Issue Date	Date Entered	Comments

Revision History			
Revision	Description of Change	Chg Order #	Approved By
A	Initial Release		
B	Updated		
C	Reformatted 3/12		RCW

Contents

Contents	6
Chapter 1 Introduction	7
1.1 Safety and Manual Conventions.....	7
1.1.1 Product Reference.....	7
1.1.2 Personal Safety Alert	7
1.1.3 Equipment Safety Alert	7
1.1.4 Notes	7
1.1.5 Electrical Safety Precautions	7
Chapter 2 Configuration Table.....	8
Chapter 3 Functional Description	9
3.1 Introduction.....	9
3.2 General Description.....	9
Chapter 4 Controls and Indicators	10
4.1 VXI Logical Address	10
4.2 LEDs.....	10
4.2.1 “BUS” LED	10
4.2.2 “PWR” LED.....	10
Chapter 5 Internal Settings	11
5.1 Fuse.....	11
5.2 VXI _{bus} Interrupt Level Selection.....	11
Chapter 6 Specifications	12
Chapter 8 Register Map	14
8.1 REGISTER MAP – 16 BIT ASSIGNMENTS	15
8.2 REGISTER MAP – 32 BIT ASSIGNMENTS	17

Chapter 1 Introduction

1.1 Safety and Manual Conventions

This manual contains conventions regarding safety and equipment usage as described below.

1.1.1 Product Reference

Throughout this manual, the term “Common Core Switching Platform, Series 8800” refers to all models of within the series, unless otherwise specified.

1.1.2 Personal Safety Alert



WARNING: Indicates a hazardous situation which, if not avoided, could result in death or serious injury.

1.1.3 Equipment Safety Alert



CAUTION: Indicates a situation which can damage or adversely affect the product or associated equipment.

1.1.4 Notes

Notes are denoted and used as follows:

NOTE: Highlights or amplifies an essential operating or maintenance procedure, practice, condition or statement.

1.1.5 Electrical Safety Precautions

Any servicing instructions are for use by service-trained personnel only. To avoid personal injury, do not perform any service unless you are qualified to do so.

For continued protections against fire hazard, replace the AC line fuse only with a fuse of the same current rating and type. Do not use repaired fuses or short circuited fuse holders.

Chapter 2 Configuration Table

Basic RF Module WITHOUT RF Switches	MAXIMUM CONFIGURATION	VXI Width
90400340	Six 1x6 RF Switches	2
90400350	Twelve 1x6 RF Switches	3
90400730	Four 1x6 RF Switches (TERM)	2
90400950	Three 1x6 TERM & Three SPDT, TERM	2
90400720	Eight 1x6, TERM.	4
90401080	Six 1x6, TERM & Six SPDT, TERM	4
90400580	Eight 1x6, TERM & Three SPDT, TERM.	5
9040350-003	Five 1x6, Non-Term, Two SPDT, Non-Term, One 1x6, Term, Two SPDT, Term	3
90401470	Fifteen 1x6 RF Switches	4
90401470-100	Ten 1x6 RF Switches, & Five Transfer RF Switches	4

Chapter 3 Functional Description

3.1 Introduction

This manual provides basic information for the operation and maintenance of the Series 3000-2xxxx VXI Modules.

3.2 General Description

The Series 3000-2xx is a collection of standard VXI modules that have a variety of configurations of RF Switches. Consult the Configuration List at the back of the manual to see our present standard (COTS) products.

Our present standard offering of RF Switches is 1x6 and SPDT, 26.5GHz, Non-Terminated and 1x6 and SPDT, 18.0 GHz, Terminated. Other switch units such as 1x8, Transfer switches and bandwidths up to 40 GHz can also be accommodated.

One of the unique features of the Series 3000-2xx RF Modules is that the RF Switches can be removed and replaced from the front of the unit. This allows quick replacement for maintenance or re-configuration without requiring the complete removal of the VXI Module.

Another feature is that all VXI RF Modules are Configurable. This means that for any particular module you can have as many or as few RF Switches as you want, in any arrangement , for your unique application.

While the Configuration List shows the products that presently exist in our inventory, custom configurations can easily be developed since changes would primarily involve the Front Panel. The internal electronic circuits and VXI interface would remain the same. Any device that can be operated by a programmed bit and mounted on the front panel (such as Optical Switches) can be accommodated.


Consult with the factory if you have particular needs.

Chapter 4 Controls and Indicators

The following controls and indicators are provided to select and display the functions of the ASCOR 3000-2xxxx Module's operating environment.

4.1 VXI Logical Address

The Logical Address Switch is dual circular switches, D1 and D2 which are located at the rear of the module. The address can be set to any value between 1 and 255 (decimal) or 1 and FF (hexadecimal), (address 0 is reserved for the resource manager). However, the Module fully supports Dynamic Configuration as defined in **Section F of the VXI specification**, address 255 (FF) should be selected only if the Resource Manager also supports Dynamic Configuration.

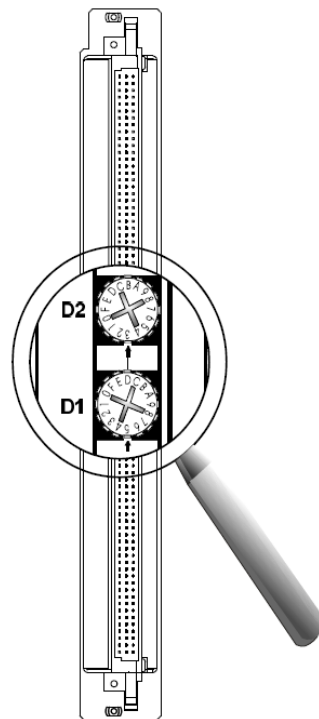

4.2 LEDs

The following LEDs are visible at the Module's front panel to indicate the status of the module's operation:

4.2.1 "BUS" LED

This green color LED is normally off and will flash on when the module is addressed by the system.

4.2.2 "PWR" LED

This red color LED is normally on when the Module is Powered up.

Chapter 5 Internal Settings

The following items are inside the module and can be reached by removing the side cover.

5.1 Fuse

The ASCOR VXI 3000-2xxxx uses a 10 Amp fuse in the +5 Volt line and is located on the Mother Board (MB) assembly.

5.2 VXI_{bus} Interrupt Level Selection

The VXIbus interrupt level is set with three bits in the “3Eh” register.

See the section on “A16 ADDRESS SPACE REGISTER DESCRIPTION”.

The interrupt level is factory set to “no interrupt”.

Chapter 6 Specifications

RF Switches – General Characteristics, other Relays available upon Request

1x6 Non-Terminated (p/n 52200020)

Frequency (GHz)	DC - 3	3 - 8	8 -12.4	12.4 -18	18 – 26.5
VSWR (MAX)	1.20 : 1	1.30 : 1	1.40 : 1	1.50 : 1	1.60 : 1
Insertion Loss (MAX)	0.20 dB	0.30 dB	0.40 dB	0.50 dB	0.60 dB
Isolation >=	80 dB	70 dB	60 dB	60 dB	55 dB
Average Power (*)	120 W	80 W	60 W	50 W	30 W

Characteristic Impedance : 50 Ohms
 Switching Time (nominal @ 25° C) < 10 ms
 Actuation Voltage : 12 VDC @ 250 ma
 Connectors : SMA Female
 Life Expectancy : 5,000,000 cycles per position
 Operation Mode : All positions Open at Reset

SPDT Non-Terminated (p/n 52200120)

Frequency (GHz)	DC - 3	3 - 8	8 -12.4	12.4 -18	18 – 26.5
VSWR (MAX)	1.20 : 1	1.30 : 1	1.40 : 1	1.50 : 1	1.60 : 1
Insertion Loss (MAX)	0.20 dB	0.30 dB	0.40 dB	0.50 dB	0.60 dB
Isolation >=	80 dB	70 dB	60 dB	60 dB	55 dB
Average Power (*)	120 W	80 W	60 W	50 W	30 W

Characteristic Impedance : 50 Ohms
 Switching Time (nominal @ 25° C) < 10 ms
 Actuation Voltage : 12 VDC @ 160ma
 Connectors : SMA Female
 Life Expectancy : 10,000,000 cycles
 Operation Mode : Failsafe

1x6 Terminated (p/n 52200060) (1)

Frequency (GHz)	DC - 3	3-8	8-16	16-18
VSWR (MAX)	1.20 : 1	1.30 : 1	1.40 : 1	1.50 : 1
Isolation (MAX)	80 dB	70 dB	60 dB	60 dB
Insertion Loss (dB)	0.20 dB	0.30 dB	0.40 dB	0.50 dB
Average Power (*)	120 W	80 W	60 W	50 W

Characteristic Impedance : 50 Ohms
 Switching Time (nominal @ 25° C) < 15 ms
 Actuation Voltage : 12 VDC @ 680ma
 Connectors : SMA Female
 Life Expectancy : 1,000,000 cycles
 Operation Mode : Terminated at Reset

SPDT Terminated (p/n 52200040) (1)

Frequency (GHz)	DC - 3	3-8	8-16	16-18
VSWR (MAX)	1.20 : 1	1.30 : 1	1.40 : 1	1.50 : 1
Isolation (MAX)	80 dB	70 dB	60 dB	60 dB
Insertion Loss (dB)	0.20 dB	0.30 dB	0.40 dB	0.50 dB
Average Power (*)	120 W	80 W	60 W	50 W

Characteristic Impedance :	50 Ohms
Switching Time (nominal @ 25° C)	< 20 ms
Actuation Voltage :	12 VDC @ 680ma
Connectors :	SMA Female
Life Expectancy :	1,000,000 cycles
Operation Mode :	At Reset : NC -> C ; NO Terminated

(*) = average Power a 25° C per RF Path

(1) = CAUTION : Termination Resistors have a MAXIMUM Power rating of 2 Watt.

Mechanical:

The VXI RF modules come in various standard VXI widths. Some are 2-wide, 3-wide , 4-wide or 5-wide. The Depth and the Height are per the VXI Standard. The Widths are multiplies of the standard VXI 1-wide modules. See the Configuration List for the Width of any particular module.

	2-WIDE	3-WIDE	4-WIDE	5-WIDE
WIDTH	2.4 inches	3.6 inches	4.8 inches	6.0 inches
HEIGHT	10.317 inches	10.317 inches	10.317 inches	10.317 inches
DEPTH	13.78 inches	13.78 inches	13.78 inches	13.78 inches

Weight 3 to 8 lbs depending on configuration

Environmental Specifications

Temperature:

Operating: 0° to 55°C

Storage: - 40° to 75°C

Relative Humidity:

Operating: 0 to 90% non-condensing

Storage: 0 to 95% non-condensing

Chapter 8 Register Map

Programming of the Model 3000-2xx is very straight forward. The module is organized into eight sixteen bit registers. Each register supports 16 coil drivers in 16 BIT Mode or two 16 bit registers support 32 coil drivers in 32 BIT Mode.

For example, the lower eight bits (bits 0-7) of the first register control the first switch SW1.

The upper eight bits (8-15) controls the second switch SW2.

The lower eight bits (bits 0-7) of the second register controls SW3.

The upper eight bits (8-15) controls SW4.

This configuration is carried through the complete module.

Register Map – 16 Bit Configuration

A16 Register

Offset	Value
00h	CFB5 7 = Register Based, A16,/A24 Module FB5 = VXI Manufacturer ID, ASCOR
02h	7FCC (for 3000-2xx) 7 = A24 space requirement FCC – Model Number for this Module
04h	FFFCh Bit 0, reset, is supported. Toggling this bit will clear all relay registers
06G	(Assigned by Resource Manager)

Control Bit

3Eh	0	Low true output enable to the coil driver IC's
	1	When low, enables read back of the coil state. When high, enables read back of the data registers.

NOTE : There is no data register read back for this module. Always clear this bit low.

2	Always set LOW. (Reserved for factory use only)
3-15	Don't Care Bits

8.1 REGISTER MAP - 16 BIT ASSIGNMENTS

ADDRESS OFFSET = 40h

	MSB								LSB							
Register Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SW - Contact	2-8	2-7	2-6	2-5	2-4	2-3	2-2	2-1	1-8	1-7	1-6	1-5	1-4	1-3	1-2	1-1

ADDRESS OFFSET = 42h

	MSB								LSB							
Register Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SW - Contact	4-8	4-7	4-6	4-5	4-4	4-3	4-2	4-1	3-8	3-7	3-6	3-5	3-4	3-3	3-2	3-1

ADDRESS OFFSET = 44h

	MSB								LSB							
Register Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SW - Contact	6-8	6-7	6-6	6-5	6-4	6-3	6-2	6-1	5-8	5-7	5-6	5-5	5-4	5-3	5-2	5-1

ADDRESS OFFSET = 46h

	MSB								LSB							
Register Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SW - Contact	8-8	8-7	8-6	8-5	8-4	8-3	8-2	8-1	7-8	7-7	7-6	7-5	7-4	7-3	7-2	7-1

ADDRESS OFFSET = 48h

	MSB								LSB							
Register Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SW - Contact	10-8	10-7	10-6	10-5	10-4	10-3	10-2	10-1	9-8	9-7	9-6	9-5	9-4	9-3	9-2	9-1

ADDRESS OFFSET = 4Ah

	MSB								LSB							
Register Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SW-Contact	12-- 8	12-- 7	12-- 6	12-- 5	12-- 4	12-- 3	12-- 2	12-- 1	11-8	11-7	11-6	11-5	11-4	11-3	11-2	11-1

ADDRESS OFFSET = 4Ch

	MSB								LSB							
Register Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SW - Contact	14-8	14-7	14-6	14-5	14-4	14-3	14-2	14-1	13-8	13-7	13-6	13-5	13-4	13-3	13-2	13-1

ADDRESS OFFSET = 4Eh

	MSB								LSB							
Register Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SW - Contact	16-8	16-7	16-6	16-5	16-4	16-3	16-2	16-1	15-8	15-7	15-6	15-5	15-4	15-3	15-2	15-1

SW = Switch designation
Contact = Switch Contact

8.2 REGISTER MAP – 32 BIT ASSIGNMENTS

ADDRESS OFFSET = 40h

Register Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SW - Contact	2-8	2-7	2-6	2-5	2-4	2-3	2-2	2-1	1-8	1-7	1-6	1-5	1-4	1-3	1-2	1-1

LSB

MSB

Register Bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
SW - Contact	4-8	4-7	4-6	4-5	4-4	4-3	4-2	4-1	3-8	3-7	3-6	3-5	3-4	3-3	3-2	3-1

ADDRESS OFFSET = 44h

Register Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SW - Contact	6-8	6-7	6-6	6-5	6-4	6-3	6-2	6-1	5-8	5-7	5-6	5-5	5-4	5-3	5-2	5-1

LSB

MSB

Register Bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
SW - Contact	8-8	8-7	8-6	8-5	8-4	8-3	8-2	8-1	7-8	7-7	7-6	7-5	7-4	7-3	7-2	7-1

ADDRESS OFFSET = 48h

Register Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SW - Contact	10-8	10-7	10-6	10-5	10-4	10-3	10-2	10-1	9-8	9-7	9-6	9-5	9-4	9-3	9-2	9-1

LSB

MSB

Register Bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
SW-Contact	12-- 8	12-- 7	12-- 6	12-- 5	12-- 4	12-- 3	12-- 2	12-- 1	11-8	11-7	11-6	11-5	11-4	11-3	11-2	11-1

ADDRESS OFFSET = 4Ch

Register Bit	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SW - Contact	14-8	14-7	14-6	14-5	14-4	14-3	14-2	14-1	13-8	13-7	13-6	13-5	13-4	13-3	13-2	13-1

LSB

MSB

Register Bit	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
SW - Contact	16-8	16-7	16-6	16-5	16-4	16-3	16-2	16-1	15-8	15-7	15-6	15-5	15-4	15-3	15-2	15-1

SW = Switch designation

Contact = Switch Contact



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com