

Datel DVME-628

High Performance VME Data Acquisition Board



In Stock

Used and in Excellent Condition

Open Web Page

<https://www.artisantg.com/65291-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com


- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

FEATURES

- 8 D/A channels
- 12-Bit resolution
- Complete hardware-compatible with VMEbus specifications.
- 6 μ Second settling time.
- Three types of input coding:
 - A. Bipolar 2's complement
 - B. Bipolar offset binary
 - C. Unipolar straight binary
- Five output voltage ranges:
 - A. 0 to +5V dc
 - B. 0 to +10V dc
 - C. ± 2.5 V dc
 - D. ± 5 V dc
 - E. ± 10 V dc
- Up to 0.05% full-scale range accuracy.
- $\pm 1/2$ LSB differential nonlinearity
- 4-to-20 mA current loop output capability for DVME-628C model.
- On-board dc-to-dc power converter supplies ± 15 V dc for internal logic circuits.

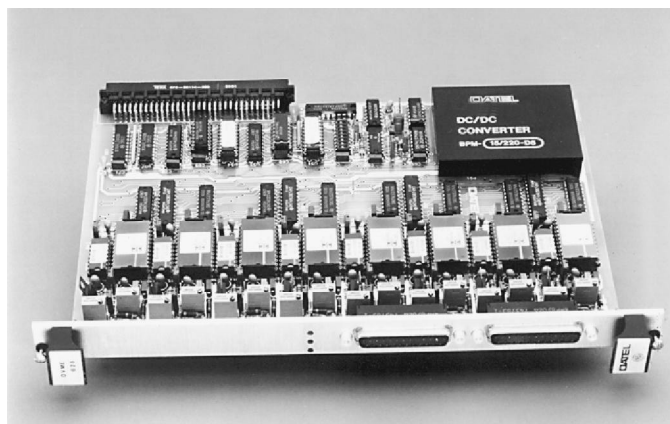

The DVME-628 is DATEL's high-end, VMEbus-based D/A board that provides analog output for up to 8 channels. The 12-bit D/A board, with 6 microsecond settling time, is designed to deliver high-performance in process control, test instrumentation and similar applications. The three input coding schemes and five analog output voltage ranges makes the board an ideal choice for the most industrial applications.

GENERAL DESCRIPTION

DATEL's VMEbus family of boards offer a complete solution to various data acquisition applications. The DVME-628 is the D/A member of this family, providing up to 8 analog outputs for the host VMEbus system. The D/A board offers a resolution of 12 bits and operates with an accuracy of better than 0.05% of full-scale range. The board is rigorously tested under extreme environmental conditions for DATEL's stringent quality assurance requirements.

The DVME-628 easily fits into a VMEbus card cage and is addressable using short I/O space address lines. The on-board switches select the base address of the board. Functions relating to input data coding and output voltage range are easily selectable using jumpers.

Functionally, the DVME-628 consists of a VMEbus interface section and a digital-to-analog converter (DAC) section. The DAC data register section contains a data register and D/A converter for each section. For DVME-628C models the DAC section also contains voltage to 4-to-20 mA current loop conversion logic for each channel. One unique feature of the DVME-628 is that the DAC outputs will reset to 0.000V during reset regardless of whether unipolar or bipolar outputs are selected.

The DVME-628 D/A board will be shipped with a user's manual. The user's manual describes the installation and calibration procedures for different applications and explains the theory of operation of the board. The user's manual also contains information on troubleshooting the board.

The board is shipped with an example 68010 assembly language diagnostic program on a 5 1/4" floppy diskette, formatted using VERSAdos. The diagnostic program source code is available in hard copy from DATEL. Consult the factory regarding the availability of the diagnostic program's source code in other disk formats.

ORDERING INFORMATION

DVME-628 $\left\{ \begin{array}{l} \text{V} - \text{Voltage outputs only} \\ \text{C} - \text{Voltage and 4-to-20mA} \\ \quad \text{current loop outputs} \end{array} \right.$

Resolution	12 Bits
Reset	Output resets to 0.000V dc at power-on
Accuracy	0.05% of FSR, minimum
Differential	0.5 LSB, maximum non-linearity
Zero Temperature Drift	3 ppm/ °C, typical 5 ppm/ °C, maximum
Offset Temperature Drift	5 ppm/ °C, typical 10 ppm/ °C, maximum
Gain Temperature Drift	15 ppm/ °C, typical 30 ppm/ °C, maximum
Settling Time	6 μ Seconds, maximum
Output Current	± 5 mA, typical
Output Impedance	50 milliohms, typical

CURRENT LOOP

Current Loop	4-to-20 mA, conforming to ISA Standard 550.1, Type 4, Class U
Accuracy	0.1% of FSR, minimum
Excitation	+15V dc, minimum
(User-supplied)	+24V dc, typical +36V dc, maximum
Load Resistance	100 Ohms, minimum 1000 Ohms, maximum

POWER SUPPLY REQUIREMENTS

+5V dc $\pm 0.5\%$ at	2.0 Amperes, typical 2.3 Amperes, maximum
-----------------------------------------------	----------------------------------------------

PHYSICAL CHARACTERISTICS

Outline Dimensions	9.19"W x 6.3"D x 0.6"H (233.35 x 160 x 15.24 mm)
Weight	1 lb. (453.6 grams)
Operating Temperature Range	0 to +60 °C
Storage Temperature Range	-20 to +80 °C
Humidity	0 to 90%, non-condensing

DVME-628 PROGRAMMING INFORMATION

The DVME-628 contains eight programmable registers that store digital data for the D/A converters. The board responds only to word data transfers on write operations. Since the DVME-628 uses 12-bit D/A converters, the 12 most significant bits of the DAC data registers are used for conversion. Table 1 shows the addresses of the identification code and the registers. Figure 2 shows the format of the DAC data register.

Table 1: DVME-628 Register Locations

ADDRESS	FUNCTION	CONTENTS
Base + 0 through Base + 63	Read	Manufacturer's/Board's identification code
Base + 160	Write	D/A Channel 0
Base + 162	Write	D/A Channel 1
Base + 164	Write	D/A Channel 2
Base + 166	Write	D/A Channel 3
Base + 168	Write	D/A Channel 4
Base + 170	Write	D/A Channel 5
Base + 172	Write	D/A Channel 6
Base + 174	Write	D/A Channel 7

Word Address: Base + 160, Base + 162, Base + 164, Base + 166, Base + 168, Base + 170, Base + 172, and Base + 174

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
DA1	DA2	DA3	DA4	DA5	DA6	DA7	DA8	DA9	DA10	DA11	DA12	x	x	x	x
MSB												LSB			

Figure 2: DVME-628 DAC Data Register Format

OUTPUT CONNECTIONS

The DVME-628 D/A boards use the J1 and J2 connectors for analog output connections. Tables 2 and 3 list the output signals of the J1 and J2 connector respectively.

Table 2: DVME-628 Analog Output Pinout Details (J1)

PIN #	DESCRIPTION
1	DAC 0 V OUT
2	DAC 0 I LOOP
3	DAC 0 V LOOP
4	DAC 1 V OUT
5	DAC 1 I LOOP
6	DAC 1 V LOOP
7	DAC 2 V OUT
8	DAC 2 I LOOP
9	DAC 2 V LOOP
10	DAC 3 V OUT
11	DAC 3 I LOOP
12	DAC 3 V LOOP
13	NO CONNECTION
14	DAC 0 ANALOG RETURN
15	DAC 0 ANALOG RETURN
16	NO CONNECTION
17	DAC 1 ANALOG RETURN
18	DAC 1 ANALOG RETURN
19	NO CONNECTION
20	DAC 2 ANALOG RETURN
21	DAC 2 ANALOG RETURN
22	NO CONNECTION
23	DAC 3 ANALOG RETURN
24	DAC 3 ANALOG RETURN
25	NO CONNECTION

Table 3: DVME-628 Analog Output Pinout Details (J2)

PIN #	DESCRIPTION
1	DAC 4 V OUT
2	DAC 4 I LOOP
3	DAC 4 V LOOP
4	DAC 5 V OUT
5	DAC 5 I LOOP
6	DAC 5 V LOOP
7	DAC 6 V OUT
8	DAC 6 I LOOP
9	DAC 6 V LOOP
10	DAC 7 V OUT
11	DAC 7 I LOOP
12	DAC 7 V LOOP
13	NO CONNECTION
14	DAC 4 ANALOG RETURN
15	DAC 4 ANALOG RETURN
16	NO CONNECTION
17	DAC 5 ANALOG RETURN
18	DAC 5 ANALOG RETURN
19	NO CONNECTION
20	DAC 6 ANALOG RETURN
21	DAC 6 ANALOG RETURN
22	NO CONNECTION
23	DAC 7 ANALOG RETURN
24	DAC 7 ANALOG RETURN
25	NO CONNECTION

DVME-628 BOARD IDENTIFICATION CODE

Byte Address	ASCII Code	Function
Base + 1	V	Identifier This ASCII code is present for all DATEL VMEbus boards
+ 3	M	
+ 5	E	
+ 7	I	
+ 9	D	
+ 0B	D	Manufacturer ID DAT is the ID for DATEL
+ 0D	A	
+ 0F	T	
+ 11	d	Board model number
+ 13	V	
+ 15	M	
+ 17	E	
+ 19	—	
+ 1B	6	
+ 1D	2	
+ 1F	8	

DATEL VMEbus Short I/O Memory Organization*

Base Address	Board Model Number	Function
Base + 0 through Base + 63	All DATEL VMEbus boards	Manufacturer's and Board's identification code
Base + 64 through Base + 77	DVME-660	48 line digital I/O board
Base + 78 through Base + 127	-----	Not Used -----
Base + 128 through Base + 143	DVME-611 DVME-612	DVME-611: 32 single-ended/ 16 differential channel A/D board DVME-612: 32 single-ended/ 16 differential channel A/D board with 2 D/A channels
Base + 152 through Base + 159	-----	Not Used -----
Base + 160 through Base + 175	DVME-612 DVME-624 DVME-628	DVME-612: 32 single-ended/ 16 differential channel A/D board with 2 D/A channels DVME-624: 4-channel isolated D/A board DVME-628: 8-channel D/A board
Base + 176 through Base + 191	-----	Not Used -----
Base + 192 through Base + 255	-----	Not Used -----

*This chart does not apply to the following products:

DVME-601
DVME-613
DVME-614
DVME-622
DVME-630

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanng.com | [artisanng.com](https://www.artisanng.com)

