



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

J2, J2 VSB, J3 VME OVERLAY MODULES



FEATURES

- 4-layer controlled impedance stripline design
- Minimum width permits use of several overlays on one backplane
- Replaces wirewrap or ribbon cable assembly
- Virtually zero crosstalk

BOARD SPECIFICATIONS

- 4-layer board
- 2 oz. copper power and ground
- PCB FR-4 or equivalent
- PCB .157" thick
- PCB Material: Nelco 4000-13SI

MECHANICAL SPECIFICATIONS

- 3U height
- 2-6 Slots

DESCRIPTION

In three forms, VSB, J2-rows A+C, and J3-row B. The J2 overlay module is used to upgrade an existing VMEbus J2 backplane to include the pinouts needed to implement signal bussing of the A and C rows of the connector. Modules can be plugged into the pin side of the host backplane. All row A and C pins are bussed. Each module's high performance (40MHz) can be attributed to its stripline, controlled impedance design.

Several overlay modules can be stacked on the host backplane. Their ends can be stacked in any direction. All of these features make the backplane overlay module far more convenient and effective than wire wraps and ribbon cables. The standard type module uses flush tail DIN connectors.

The J3 overlay module is used to upgrade an existing VMEbus J3 backplane to include the pinouts needed to implement signal bussing of the B row of the connector. Modules can be plugged into the pin side of the host backplane. All row B pins are bussed. Each module's high performance (40MHz) can be attributed to its stripline, controlled impedance design.

The VSB overlay is an entirely dedicated multilayer system designed in accordance with VSB specification C. Overlays are installed on the pin or reverse side of the VMEbus J2 backplanes. With VSBbus, all A and C row pins are bussed with the exception of the BGIN*/BGOUT* daisy chain that runs between pins A31 and C32, the GA0-GA2 geographical address bits that exist on pins A28, A29, and A30, and additional ground pins as assigned by the specification.

Related Products from Elma Electronic:

- System Platforms – need a chassis for your backplane?
- VME Embedded Computing Products – SBCs, Switches, Storage, and More



Did you know we also offer with this VME backplane:

- VME test & form factor extenders, load boards, RTMs, and overlays
- Thermal or backplane simulation/test, paint/silkscreen, customization, integration

System
Platforms

Backplanes


Enclosures &
Components

Cabinets

Rotary
Switches

J2, J2 VSB, J3 VME OVERLAY MODULES

LINE DRAWING

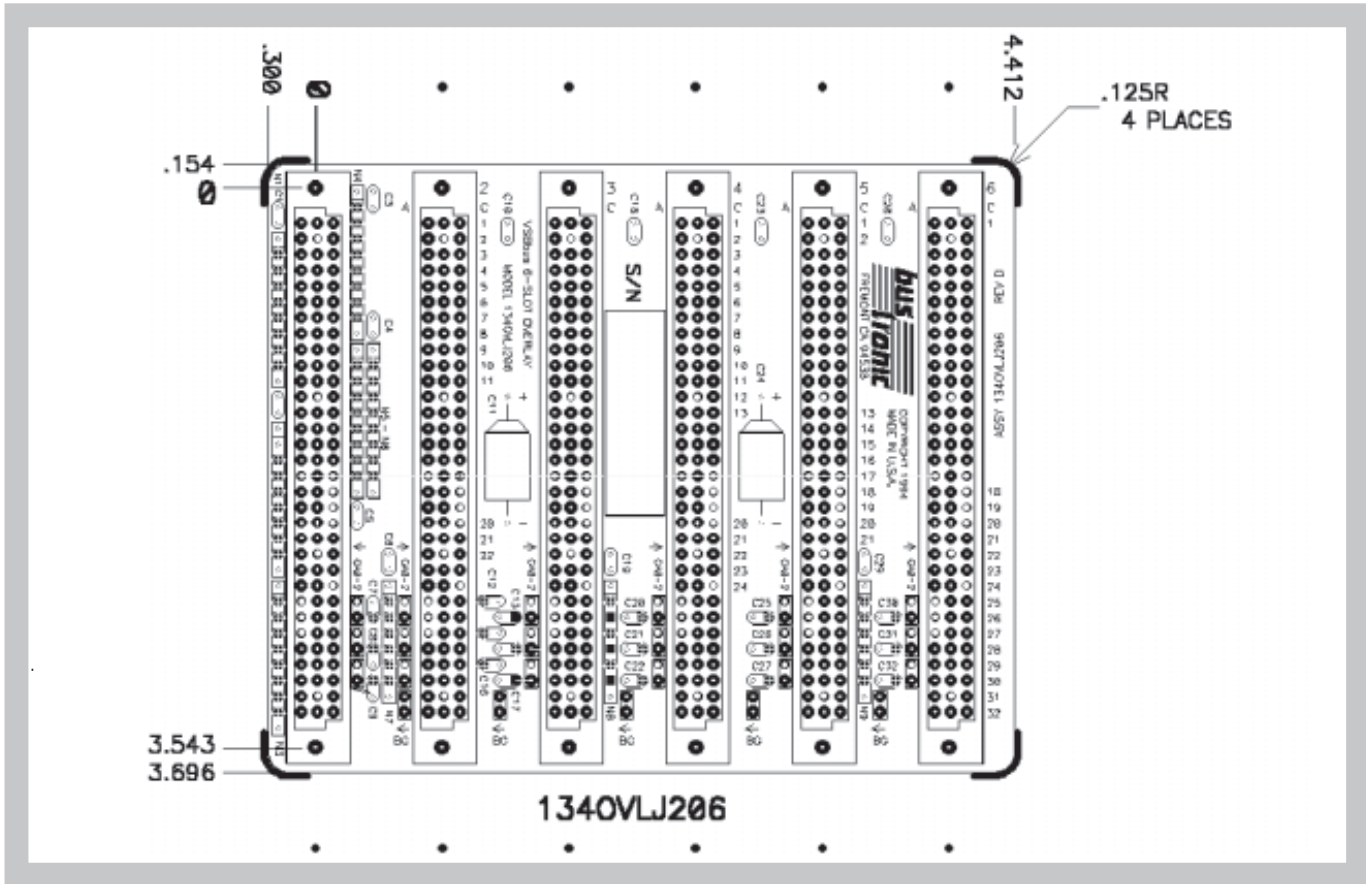

ORDER INFORMATION

Slots	Height		Width		Part Number		
	in	mm	in	mm	J2 Rows A+C Overlay	J2 VSB Overlay	J3 Row B Overlay
2	3.850	99.790	1.400	35.560	132OVLJ202	134OVLJ202	132OVLJ302
3	3.850	99.790	2.200	55.880	132OVLJ203	134OVLJ203	132OVLJ303
4	3.850	99.790	3.000	76.200	132OVLJ204	134OVLJ204	132OVLJ304
5	3.850	99.790	3.800	96.520	132OVLJ205	134OVLJ205	132OVLJ305
6	3.850	99.790	4.600	116.840	132OVLJ206	134OVLJ206	132OVLJ306

PRODUCT CONFIGURATIONS

J2, J2 VSB J3 VME OVERLAY MODULES

(Example: 132OVLJ206-0001)

13	Product	Form	Specifier	Slots	- - - - - Configuration
	<p>Product 2 = SUN 4 = VSB</p> <p>Form OVLJ = Bus overlay module</p> <p>Specifier J1 = J1 J2 = J2 J3 = J3</p> <p>02-21 = Slots</p> <p>Configuration</p> <p>J1 Connector Tail Length is Applicable _____</p> <p>0 = 13mm, 96 pin connector & shroud 1st & last slots, 6mm all else 1 = 17mm, 96 pin connector & shroud 1st & last slots, 6mm all else 2 = 6mm, 96 pin connector all slots 3 = 13mm, 96 pin connector & shroud all slots 4 = 17mm, 96 pin connector & shroud all slots 5 = 6mm 160 pin VME64x connector & shroud all slots X = Not applicable</p> <p>J2 Connector Tail Length if Applicable _____</p> <p>0 = 13mm, 96 pin connector & shroud 1st & last slots, 6mm all else 1 = 17mm, 96 pin connector & shroud 1st & last slots, 6mm all else 2 = 6mm, 96 pin connector all slots 3 = 13mm, 96 pin connector & shroud all slots 4 = 17mm, 96 pin connector & shroud all slots 5 = 6mm 160 pin VME64x connector & shroud all slots X = Not applicable</p> <p>J3 Connector Tail Length if Applicable _____</p> <p>0 = 13mm, 96 pin connector & shroud 1st & last slots, 6mm all else 1 = 17mm, 96 pin connector & shroud 1st & last slots, 6mm all else 2 = 6mm, 96 pin connector all slots 3 = 13mm, 96 pin connector & shroud all slots 4 = 17mm, 96 pin connector & shroud all slots 5 = 6mm 160 pin VME64x connector & shroud all slots X = Not applicable</p> <p>On-Board Termination _____</p> <p>0 = Yes 1 = No</p>				

COMMON CONFIGURATION EXAMPLES

-0000

-0001



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com