



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Center One




Universal and compact display and operating unit for operating the active sensors from the CERA-VAC, THERMOVAC, PENNINGVAC and IONIVAC series.

Advantages to the User

- ◆ Power supply voltage for the transmitters
- ◆ Display range from 1×10^{-10} to 1330 mbar
- ◆ Readout selectable between mbar, Torr or Pascal
- ◆ Adjustable switching threshold with relay contact and variable hysteresis
- ◆ Chart recorder output 0 - 10 Volt
- ◆ RS 232 C interface
- ◆ Compact bench top enclosure (1/4 19-in., 2 HE)
- ◆ For fitting into 19-in., 3 HU racks

Connectable Sensors

- ◆ CERAVAC CTR 90 and CTR 91
- ◆ THERMOVAC TTR 90, TTR 90 S, TTR 216
- ◆ PENNINGVAC PTR 225 and PTR 237
- ◆ IONIVAC ITR 90 and ITR 100

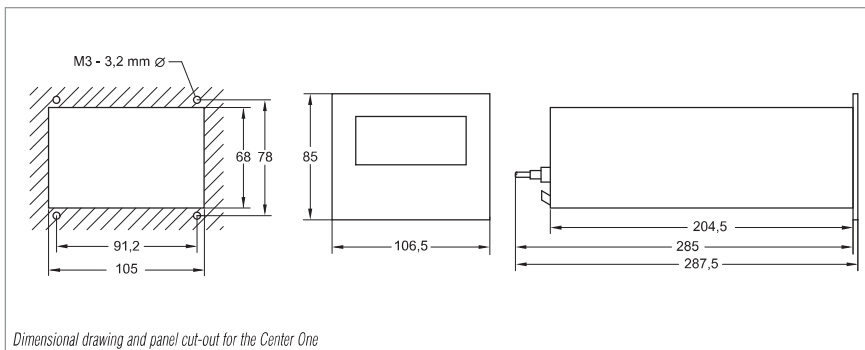

Technical Data	Center One	Ordering Information	Center One
Number of measurement channels	1	EU version US version	Part No. 230 002 Part No. 235 002
Display for measured values	Digital, 7 segment LED, 5 digits		
Display range	mbar (Torr) 1×10^{-10} to 1330 (0.75×10^{-10} to 1000)	Connecting cable, CERAVAC	
Unit of measurement (selectable)	mbar, Torr, Pascal	5 m	Part No. 129 34
Witching threshold	Floating changeover contact with variable hysteresis	10 m	Part No. 129 33
Chart recorder output ($R_a > 10 \text{ k}\Omega$)	0 - 10 Volt, characteristic corresponds to the connected transmitter	20 m	Part No. 129 35
Electrical outputs	Switching contacts and chart recorder outputs via 25 way Sub-D socket	30 m	Part No. 129 36
Interface	RS 232 C (Cable length 30 m max.)	Connecting cable, THERMOVAC and PENNINGVAC	
Main connection	85 V - 264 V AC / 50-60 Hz	5 m	Part No. 124 26
Weight	kg (lbs) 0.85 (1.9)	10 m	Part No. 157 33
		15 m	Part No. 124 27
		20 m	Part No. 124 28
		30 m	Part No. 124 29
		40 m	Part No. 124 30
		50 m	Part No. 124 31
		75 m	Part No. 124 32
		100 m	Part No. 124 33
		Connecting cable, IONIVAC	
		5 m	Part No. 124 55
		10 m	Part No. 163 83
		15 m	Part No. 124 56
		20 m	Part No. 124 57
		30 m	Part No. 124 58
		Adapter panel for installation in a 3 HU 19-in. rack	Part No. 230 005
		Screw terminal for the 25 way output socket	Part No. 230 006





Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com