ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.


Find the *Automation Direct / PLCDirect D4-16SIM* at our website: *Click HERE*


AC/DC Input and Simulator Modules


F4-08NE3S AC/DC Input <--->	
Inputs per Module	8 (sink/source)
Commons per Module	8 (isolated)
Input Voltage Range	90-150VAC/VDC
Peak Voltage	350 peak < 1ms
AC Frequency	47-63Hz
ON Voltage Level	>90VDC/75VAC
OFF Voltage Level	<60VDC/45VAC
Input Impedance	22KΩ
Input Current	5.5mA @ 120V
Minimum ON Current	4mA
Maximum OFF Current	2mA
Base Power Required 5V	90mA max
OFF to ON Response	8ms
ON to OFF Response	15ms
Terminal Type (included)	Removable (D4-16IOCON)
Status Indicators	Logic side
Weight	9oz. (256g)


D4-16SIM Input Simulator <--->	
Inputs per Module	8 or 16 selectable by internal switch
Base Power Required 5V	150mA max
Terminal Type	None
Status Indicators	Logic side
Weight	8.8oz. (250g)
8 or 16 point selection switch is located on the back of the module 8 or 16 point selection is indicated by the LEDs above the input switch status	


See Wiring Solutions for part numbers of *ZIP*Link cables and connection modules compatible with this I/O module.

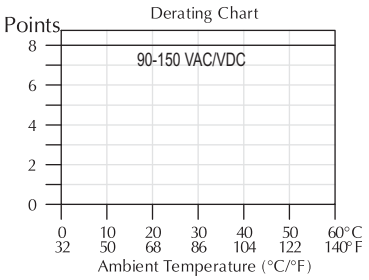

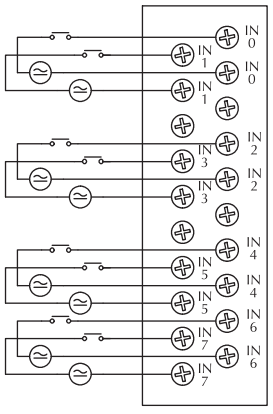

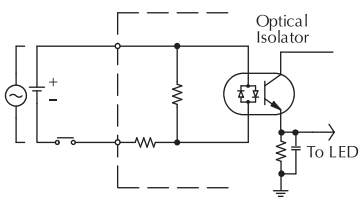

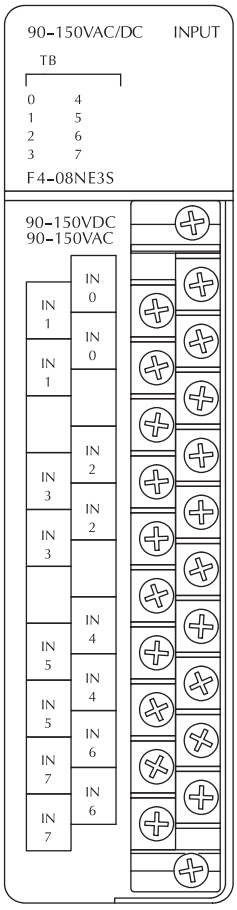

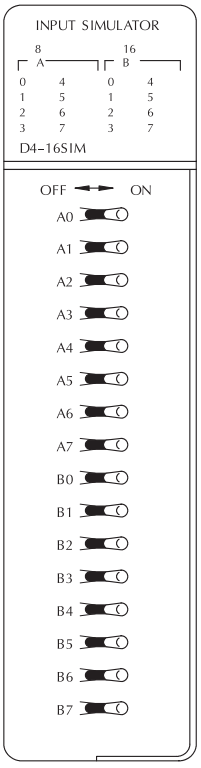

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Check the Power Budget

Verify your power budget requirements

Your I/O configuration choice can be affected by the power requirements of the I/O modules you choose. When determining the types and quantity of I/O modules you will be using, it is important to remember there is a limited amount of power available from the power supply.

The chart on the opposite page indicates the power supplied and used by each DL405 device. The adjacent chart shows an example of how to calculate the power used by your particular system. These two charts should make it easy for you to determine if the devices you have chosen fit within the power budget of your system configuration.

If the I/O you have chosen exceeds the maximum power available from the power supply, you can resolve the problem by shifting some of the modules to an expansion base or remote I/O base (if you are using remote I/O).

Warning: It is extremely important to calculate the power budget correctly. If you exceed the power budget, the system may operate in an unpredictable manner which may result in a risk of personal injury or equipment damage.

Use *ZIP*Links to reduce power requirements

If your application requires a lot of relay outputs, consider using the ZipLink AC or DC relay output modules. These modules can switch high current (10A) loads without putting a load on your base power budget. Refer to Wiring System for DL405 PLCs later in this section for more information.

This logo is placed next to I/O modules that are supported by the *ZIP*Link connection systems.

See the I/O module specifications at the end of this section.



Calculating your power usage

The following example shows how to calculate the power budget for the DL405 system. The example is constructed around a single 8-slot base using the devices shown. It is recommended you construct a similar table for each base in your system.

A				
	Base Number 0	***Device Type***	***5 VDC (mA)***	***External 24 VDC Power (mA)***
B	**CURRENT SUPPLIED**			
	CPU/Expansion Unit /Remote Slave	D4-440 CPU	3700	400
C	**CURRENT REQUIRED**			
	SLOT 0	D4-16ND2	+150	+0
	SLOT 1	D4-16ND2	+150	+0
	SLOT 2	F4-04DA	+120	+100
	SLOT 3	D4-08ND3S	+100	+0
	SLOT 4	D4-08ND3S	+100	+0
	SLOT 5	D4-16TD2	+100	+0
	SLOT 6	D4-16TD2	+100	+0
	SLOT 7	D4-16TR	+1000	+0
D	**OTHER**			
	BASE	D4-08B	+80	+0
	Handheld Programmer	D4-HPP	+320	+0
E	**Maximum Current Required**		***2820***	***100***
F	**Remaining Current Available**		***3700-2820=880***	***400-100=300***

1. Using a chart similar to the 3one above, fill in column 2.
2. Using the tables on the opposite page, enter the current supplied and used by each device (columns 3 and 4). Pay special attention to the current supplied by the CPU, Expansion Unit, and Remote Slave since they differ. Devices which fall into the "Other" category (Row D) are devices such as the Base and the Handheld programmer, which also have power requirements, but do not plug directly into the base.
3. Add the current used by the system devices (columns 3 and 4) starting with Slot 0 and put the total in the row labeled "maximum current required" (Row E).
4. Subtract the row labeled "Maximum current required" (Row E), from the row labeled "Current Supplied" (Row B). Place the difference in the row labeled "Remaining Current Available" (Row F).
5. If "Maximum Current Required" is greater than "Current Supplied" in either column 3 or 4, the power budget will be exceeded. It will be unsafe to use this configuration and you will need to restructure your I/O configuration. Note the auxiliary 24 VDC power supply does not need to supply all the external power. If you need more than the 400mA supplied, you can add an external 24VDC power supply. This will help keep you within your power budget for external power.

DL405 CPU power supply specifications and power requirements

Specification	AC Powered Units	24 VDC Powered Units	125 VDC Powered Units
Part Numbers	D4-450, D4-440, D4-430, D4-EX (expansion base unit), D4-RS (remote slave unit)	D4-450DC-1, D4-440DC-1, D4-EXDC (expansion base unit), D4-RSDC (remote slave unit)	D4-450DC-2 D4-440DC-2
Voltage Withstand (dielectric)	1 minute @ 1,500 VAC between primary, secondary, field ground, and run relay		
Insulation Resistance	> 10MΩ at 500VDC		
Input Voltage Range	85-132 VAC (110 range) 170-264 VAC (220 range	20-28 VDC (24 VDC) with less than 10% ripple	90-146 VDC (125 VDC) with less than 10% ripple
Maximum Inrush Current	20 A	20 A	20 A
Maximum Power	50 VA	38 W	30 W

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Power Requirements

Power Supplied

CPUs/Remote Units/ Expansion Units	5 VDC Current Supplied in mA	24V Aux Power Supplied in mA	CPUs/Remote Units/Expansion Units	5V Current Supplied in mA	24VAux. Power Supplied in mA
D4-430 CPU	3700	400	D4-EX	4000	400
D4-440 CPU	3700	400	D4-EXDC	4000	NONE
D4-440DC-1 CPU	3700	NONE	D4-EXDC-2	3700	NONE
D4-440DC-2 CPU	3700	NONE	D4-RS	3700	400
D4-450 CPU	3100	400	D4-RSDC	3700	NONE
D4-450DC-1 CPU	3100	NONE	H4-EBC	3470	400
D4-450DC-2 CPU	3100	NONE	H4-EBC-F	3300	400

Power Consumed

Power-consuming Device	5V Current Consumed	External 24VD Current Required	Power-consuming Device	5V Current Consumed	External 24VDC Current Required
I/O Bases			**Analog Modules (continued)**		
D4-04B-1	80	NONE	F4-16AD-1	75	100
D4-06B-1	80	NONE	F4-16AD-2	75	100
D4-08B-1	80	NONE	F4-04DA-1	70	75+20per circuit
			F4-04DA-2	90	90
DC Input Modules			F4-04DAS-1	60	60 per circuit
			F4-04DAS-2	60	60 per circuit
D4-08ND3S	100	NONE	F4-08DA-1	90	100+20 per circuit
D4-16ND2	150	NONE	F4-08DA-2	80	150
D4-16ND2F	150	NONE	F4-16DA-1	90	100+20 per circuit
D4-32ND3-1	150	NONE	F4-16DA-2	80	25 max.
D4-32ND3-2	150	NONE	F4-08RTD	80	NONE
D4-64ND2	300 max.	NONE	F4-08THM-n	120	50
			F4-08THM	110	60
AC Input Modules			**Remote I/O**		
D4-08NA	100	NONE	H4-ERM	320	NONE
D4-16NA	150	NONE	H4-ERM-F	450	NONE
			D4-RM	300	NONE
AC/DC Input Modules			**Communications and Networking**		
D4-16NE3	150	NONE	H4-ECOM100	300	NONE
F4-08NE3S	90	NONE	H4-ECOM-F	670	NONE
DC Output Modules			D4-DCM	500	NONE
			F4-MAS-MB	235	NONE
D4-08TD1	150	35	FA-UNICON	NONE	65
F4-08TD1S	295	NONE	**CoProcessors**		
D4-16TD1	200	125			
D4-16TD2	400	NONE	F4-CP128-1	305	NONE
D4-32TD1	250	140	**Specialty Modules**		
D4-32TD1-1	250	140 (15V)			
D4-32TD2	350	120 (4A max including loads)	H4-CTRIO	400	NONE
D4-64TD1	800	NONE	D4-INT	100	NONE
AC Output Modules			D4-HSC	300	NONE
			F4-16PID	160	NONE
D4-08TA	250	NONE	F4-8MPI	225	170
D4-16TA	450	NONE	D4-16SIM	150	NONE
Relay Output Modules			F4-4LTC	280	75
			Programming		
D4-08TR	550	NONE	D4-HPP-1 (Handheld Prog.)	320	NONE
F4-08TRS-1	575	NONE	**Operator Interface**		
F4-08TRS	575	NONE	DV-1000	150	NONE
D4-16TR	1000	NONE	*C-more* Micro-Graphic	210	NONE
Analog Modules					
F4-04AD	85	100			
F4-04ADS	270	120			
F4-08AD	75	90			

Artisan Scientific - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-scientific.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP