

Compumotor OEMZL6104

Microstepping Drive/Controller (With V_I/O Pin Option)



Limited Availability
Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/59728-4>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

TROUBLESHOOTING

- **LEDs:**
 - POWER** 120VAC power is applied
 - STEP** Flashes green with each step pulse.
 - OVER TEMP** Max. drive temp limit (131° F, 55° C) exceeded.
 - MOTOR FAULT** Short circuit in motor windings, motor cable is disconnected or shorted, or INTERLOCK jumper is disconnected or extended.
- **Status information (see command descriptions in 6000 Series Software Reference):**
 - General status information** TASF, TSSF, TSTAT
 - Limits (end-of-travel, home)** TASF, TLIM
 - P-CUT input** TINO (bit #6)
 - Programmable inputs and TRG-A/B** TIN, INFNC
 - Programmable outputs and OUT-A** TOUT, OUTFNC
 - Motor fault** TASXF (bit #1)
 - Low voltage fault** TASXF (bit #2)
 - Over temperature fault** TASXF (bit #3)
- **V_{I/O} must be connected to 5-24VDC for the P-CUT, HOM, NEG, POS, & TRG-A/B inputs to work.**
- **NEG & POS inputs must be grounded to GND terminal to allow motion (or disable with LH0 command).**
- **P-CUT input must be grounded to GND terminal to allow motion.**
- **To help prevent electrical noise, shield all connections at one end only.**
- **Error messages while programming or executing programs – see 6000 Series Programmer's Guide.**



Product Type: OEMZL6104 Step Motor Drive/Controller

The above product is in compliance with the requirements of directives

- 72/23/EEC Low Voltage Directive
- 93/68/EEC CE Marking Directive

Additional Information:

For complete user documentation, please refer to the Compumotor web site (www.compumotor.com) where User Guides can be found on-line or hard copies requested.


For questions, please contact:

Technical Assistance, Applications Engineering Department (e-mail tech_help@compumotor.com or call 800-358-9070 North America, 707-584-7558 International).

The following table describes which User Guides are applicable to the OEMZL6104:

Part Number	Title
88-014027-01	<u>ZETA4 User Guide</u> Note: All information contained within this user guide is applicable with the exception of the Active Damping feature. All references to this feature should be ignored.
88-015920-01	<u>ZETA4 Drive and ZETA6104 Indexer/Driver User Guide Addendum LVD Installation Instructions</u> Note: All information contained within this document is applicable to the OEMZL6104.
88-015436-01	<u>EMC Installation Guide</u> Note: Refer to the Step Motor Drives section of this document for applicable information

Quick Reference Guide

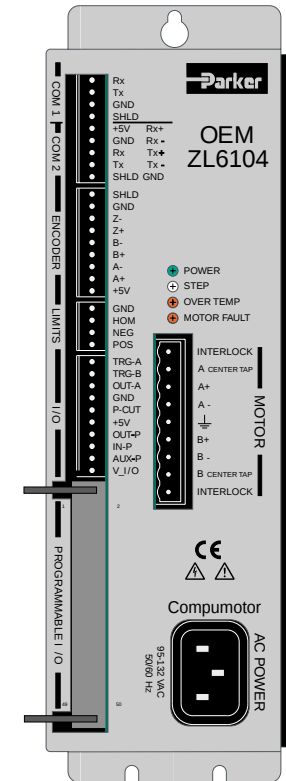


OEMZL6104 Drive/Controller

Compumotor Division
Parker Hannifin Corporation
p/n 88-018140-01 A
September 1, 1999



DIP SWITCH SETTINGS

Access through the top of the chassis (loosen screws, move cover plate)



Motor matching

Motor Current

Amps	1	2	3	4	5
0.14	off	off	off	off	off
0.26	off	off	off	off	on
0.39	off	off	off	on	off
0.51	off	off	off	on	on
0.64	off	off	on	off	off
0.76	off	off	on	off	on
0.89	off	off	on	on	off
1.01	off	off	on	on	on
1.14	off	on	off	off	off
ES21BS 1.26	off	on	off	off	on
1.38	off	on	off	on	off
ES22BS 1.51	off	on	off	on	on
1.63	off	on	on	off	off
ES23BS 1.76	off	on	on	off	on
1.88	off	on	on	on	off
2.01	off	on	on	on	on
2.14	on	off	off	off	off
ES31BS 2.26	on	off	off	off	on
ES21BP 2.38	on	off	off	on	off
2.51	on	off	off	on	on
2.63	on	off	on	off	off
2.76	on	on	off	on	off
ES32BS 2.88	on	off	on	on	off
3.01	on	off	on	on	on
ES21BS 3.13	on	on	off	off	off
3.26	on	on	off	on	on
3.38	on	on	off	on	off
ES23BP 3.50	on	on	off	on	on
3.63	on	on	on	off	off
3.75	on	on	on	on	on
3.88	on	on	on	on	on
ES31BP, ES32BP, ES33BP 4.00	on	on	on	on	on

For additional motor information refer to Compumotor's website at www.compumotor.com

AutoBaud

enabled on off
default → disabled off off

Address


default → 0 off off off off off
1 off off off off on
2 off off off on off
3 off off on on off
4 off off on off off
5 off off on off off

(Binary Weighted)

31 on on on on on


TIP: The ADDR command allows you to automatically establish addresses for multiple units in a daisy-chain or multi-drop (ADDR address overrides the DIP switch setting).

RS-232C CONNECTION




OEMZL6104

Serial Port Connection on PC




MOTOR CONNECTIONS

ES AND OS MOTORS

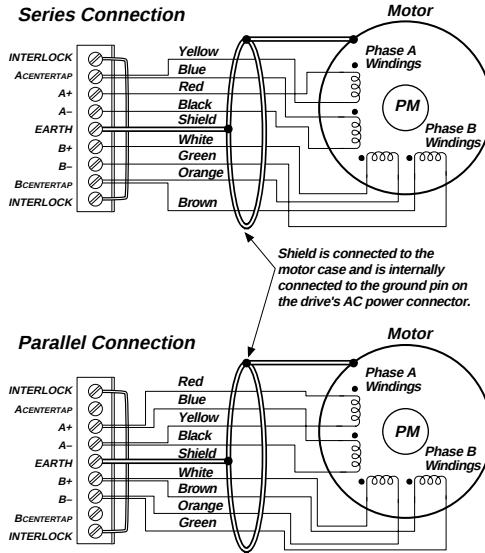

DO NOT LENGTHEN OR REMOVE INTERLOCK JUMPER

RS AND TS MOTORS

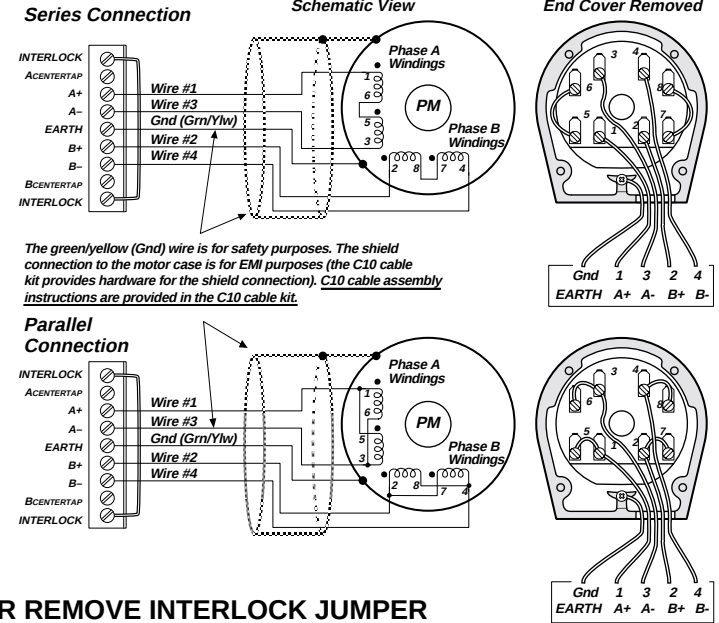


I/O SPECIFICATIONS & INTERNAL SCHEMATICS

AC Input 95-132VAC, 50/60Hz, single phase


Serial Com RS-232C 3-wire; RS-485 4-wire (change jumpers JU1-JU6 to position 1, set JU7 to position 3 if you need 2-wire, select termination resistors). Up to 99 units in a daisy chain or multi-drop. 9600 baud 8 data bits; 1 stop bit; no parity.

Limits, P-CUT, & Trigger Inputs

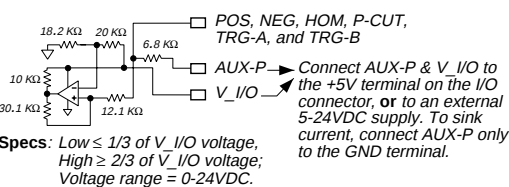


Specs: Low $\leq 1/3$ of $V_{I/O}$ voltage, High $\geq 2/3$ of $V_{I/O}$ voltage; Voltage range = 0-24VDC.

Encoder Inputs




Specs: Differential comparator. Use 2-phase quadrature encoders; max. frequency = 1.6 MHz; min. time between transitions = 625 ns. TTL levels (Low $\leq 0.4V$, High $\geq 2.4V$); range = 0-5VDC.

Programmable Inputs




Specs: HCMOS-compatible*; voltage range = 0-24VDC.

Programmable Outputs



Specs: Open collector output. Outputs will sink up to 300mA, or source up to 5mA at 5-24VDC.

Terminals found on multiple connectors



* HCMOS-compatible levels: Low $\leq 1.00V$, High $\geq 3.25V$.

** Disconnect from +5V terminal BEFORE connecting an external 5-24VDC supply.

PROGRAMMABLE I/O

Pin	Function
1	Input #16 (MSB of inputs)
3	Input #15
5	Input #14
7	Input #13
9	Input #12
11	Input #11
13	Input #10
15	Input #9
17	Output #8 (MSB of outputs)
19	Output #7
21	Output #6
23	Output #5
25	Input #8
27	Input #7
29	Input #6
31	Input #5
33	Output #4
35	Output #3
37	Output #2
39	Output #1 (LSB of outputs)
41	Input #4
43	Input #3
45	Input #2
47	Input #1 (LSB of inputs)
49	+5VDC

Even numbered pins connected to common logic ground.

STATUS LEDs

POWER	Green when power is on
STEP	Green when drive receives step; Green in auto test
OVER TEMP	Red indicates over temp fault
MOTOR FAULT	Red when drive detects short circuit in motor or motor cable; Red if interlock is open

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanTG.com | [artisanTG.com](https://www.artisanTG.com)

