



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?


Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

VWR® Traceable® Waterproof Thermometer °F/°C

Traceable® thermometer with waterproof case, cable, and probe

Here's the perfect thermometer for wet areas. Case is waterproof and shockproof. Use for round-the-clock monitoring of liquids, air/gas, or semisolids in freezers, water baths, outdoor tanks, incubators, and refrigerators. Stainless-steel probe is resistant to most laboratory chemicals. Wide range covers 99 percent of the lab's routine temperature measurements: Range is -58 to 572 °F and -50 to 300 °C with a resolution of 0.1° from -19.9 to 199.9° (otherwise 1°). Accuracy is $\pm 1^\circ\text{C}$ between -20 and 100°C . Ultra™ model accuracy is $\pm 0.5^\circ\text{C}$ at tested points. Easy-view, $\frac{1}{4}$ -inch-high LCD digits may be read with a glance. At the touch of a key, memory recalls highest and lowest temperature readings over any time period. Reading updates every second. Solid-state construction eliminates dangers inherent in breakable glass and toxic mercury thermometers. Thermometer operates without fail in rugged conditions and outdoors. Waterproof construction is ideal for wet labs, wash-down areas, and virtually all field applications. Unit is engineered to be shockproof in drop tests up to 5 feet. Stainless-steel, $4\frac{3}{4}$ -inch long, 0.14 -inch diameter probe, 10-foot cable, and digital-display housing are all waterproof.

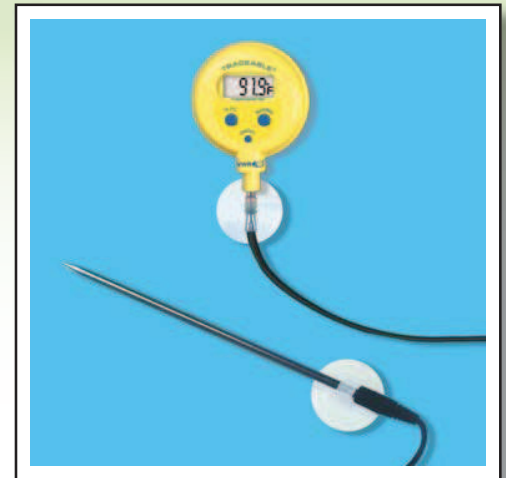

Traceable to NIST for accuracy

To assure accuracy an individually serial-numbered Traceable® Certificate is provided from an ISO 17025 calibration laboratory accredited by A2LA. It indicates traceability to standards provided by NIST (National Institute of Standards and Technology). Supplied with suction cups, magnet to attach to metal, and Velcro® to attach to any surface. Comes with Traceable® Certificate and 1.5 volt silver-oxide battery for 1-year, continuous, always-on monitoring. Size: diameter is $1\frac{3}{4}$ inches and depth is $\frac{1}{2}$ -inch. Weight is 2 ounces.

| Description | Accuracy | Cat. No. | Price |
|--|-------------------------|-----------|---------|
| VWR® Traceable® Waterproof Thermometer with probe/cable | $\pm 1^\circ\text{C}$ | 61161-283 | \$39.46 |
| VWR® Traceable® Ultra™ Waterproof Thermometer with probe/cable | $\pm 0.2^\circ\text{C}$ | 46610-024 | \$49.49 |

VWR® Traceable® Snap-in Module with Probe

Versatile panel-mount module snaps into place or is stand-alone unit. Comes complete with stainless-steel probe featuring an extended 10-foot cable and easy-to-grab handle.

Easy-view, four-digit LCD is $\frac{3}{4}$ -inch-high

Records minimum and maximum memory readings over any time period. Temperature range encompasses virtually all testing requirements: -58 to 572°F and -50 to 300°C . Resolution is 0.1° from -20 to 200° ; 1° outside this range. Accuracy is $\pm 1^\circ\text{C}$ between -20 and 100°C . Reading updates every second.

Traceable to NIST for accuracy

To assure accuracy an individually serial-numbered Traceable® Certificate is provided from an ISO 17025 calibration laboratory accredited by A2LA. It indicates traceability to standards provided by NIST (National Institute of Standards and Technology). Dimensions: $1\frac{1}{2}$ -inch-height; $2\frac{1}{16}$ -inch width; $\frac{1}{2}$ -inch-depth. Probe diameter 0.14 inch; probe length (including handle) $2\frac{3}{4}$ inches; cable length 10 feet. Supplied with a Traceable® Certificate, probe, cable, and battery.



| Description | Cat. No. | Price |
|---|-----------|---------|
| VWR® Traceable® Snap-in Module with Probe | 77776-730 | \$25.19 |



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com