ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Pickering 20-730-902-B* at our website: ***Click HERE***

20-730
120Ω RF Multiplexer Module

- 120Ω Balanced R.F. Multiplexer with 200MHz Bandwidth
- Dual 16 to 1 Configuration
- 120Ω Differential Version Suitable for Digital Telecoms/Data Switching
- Front Panel Mounted High Density Connectors
- May be Used for Building Larger Switching Networks
- Built-In Self Test
- Suitable for Digital Applications to over 34MBits/s



Model 20-730-802 is a Dual 16 Channel RF Multiplexer and is suitable for switching 2-wire 120Ω telecommunications traffic with signal frequencies up to 34MBit with good insertion loss, return loss and isolation performance. The 20-730-802 has a bandwidth in excess of 200MHz.

Models 20-730-802 are designed specifically for digital telecommunications switching using 120Ω twisted pair cabling, the module uses 50-way D-type connectors. It is suitable for switching digital frequencies from d.c. to over 34MBits/s, it is especially popular for 2Mbit/s signals.

The 20-730-802 may be used with it's companion product the 20-520 series of matrix modules, these also have a balanced 120Ω impedance, they are available in 16 x 4 or 8 x 8 formats (please refer to the 20-520 series data sheet for further details).

Programming

The Multiplexer module is simple to program:-


`ARESET a`	Open all channels on device `a`
`DELAY t`	Force a minimum delay of `t` milliseconds between two instructions
`DIAGNOSTIC?`	Report any Self Test errors
`RESET`	Open all switches on all modules
`VIEW? a`	View status of device `a`
`CHAN a,b,c`	Select channel `c` on bank `b` of multiplexer `a`
`CHAN a,b,c,s`	Multi-channel selection argument `s` allows opening/closing of any combination of channels, this is only suitable for low frequency applications.

Self Test

Self-Test is invoked at power on and may also be operated under software (*TST?) or via a recessed push button. Self-Test pass is indicated on a front panel LED with a full pass/fail description available using the DIAGNOSTIC? command. Self-Test comprises 2 levels:-


1. **Logic Test**
2. **Relay Coil Test**


These two levels of testing will find the majority of failures, however the relay contacts themselves are not tested.

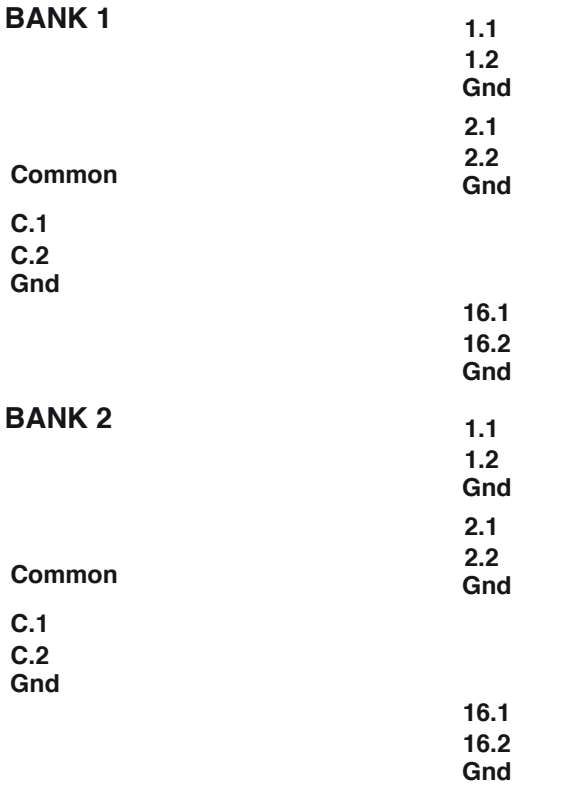



Switching Diagram for the 20-730 RF Multiplexer Module

ISSUE 3.2 NOV 2007

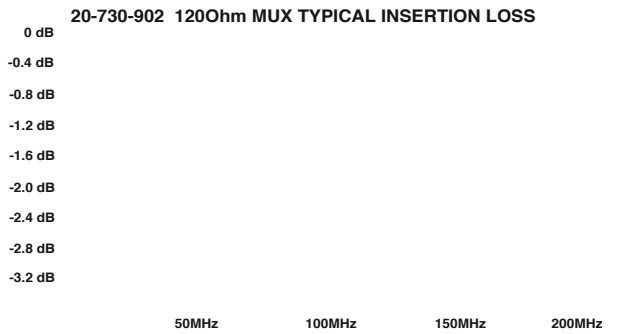

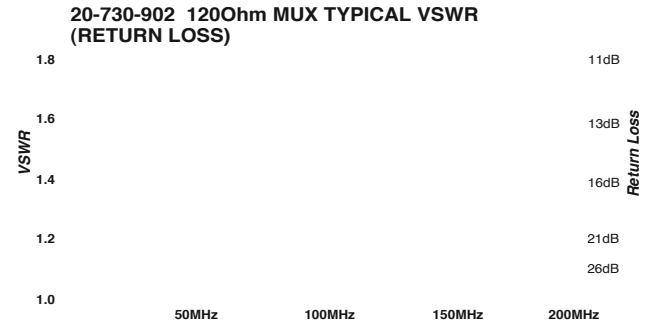

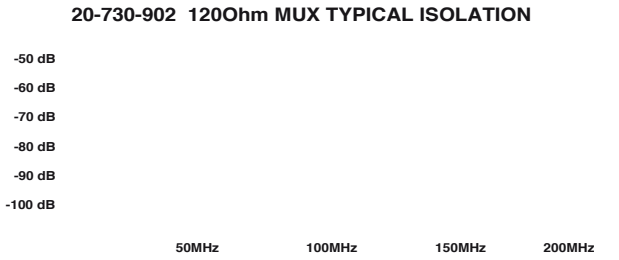

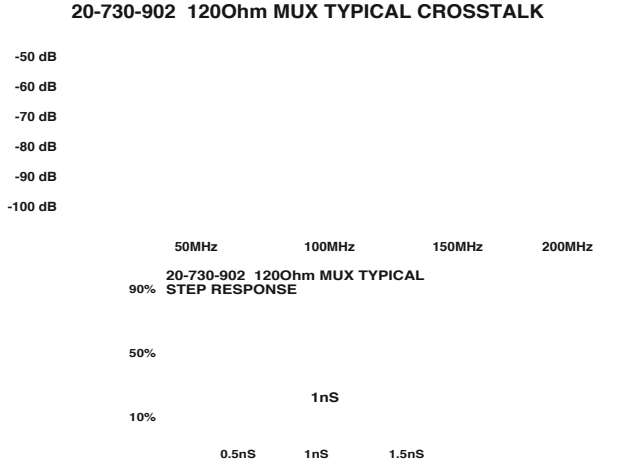

Typical RF Performance Plots for 20-730-802

Operating/Storage Conditions

Operating Conditions

Operating Temperature:	0°C to 55°C
Humidity:	Up to 95% non-condensing
Altitude:	5000m

Storage and Transport Conditions

Storage Temperature:	-20°C to +75°C
Humidity:	Up to 95% non-condensing
Altitude:	15000m

Specification

Characteristic Impedance:	120Ω Balanced
Maximum Frequency:	200MHz
Rise Time:	<1ns
Insertion Loss:	<3dB
Return Loss:	<11dB (1:1.8 VSWR)
Isolation (at max frequency):	>60dB
Crosstalk (at max frequency):	>55dB
Maximum Voltage:	100V DC
Maximum Power:	10W
Maximum Switch Current:	0.5A
Maximum Carry Current:	1.2A
On Path Resistance:	<500mΩ
Off Path Resistance:	$>10^{10}\Omega$
Differential Thermal Offset:	<10µV
Switching Time:	10ms
Expected Life (Low power):	$>1x10^{8}$ operations
Expected Life (Full power):	$>5x10^{6}$ operations

Further Options

The 20-730-802 multiplexer is available with further options:-

- A lower performance, lower cost version is available for less stringent multiplexing applications.
- Built in positions for internal 120Ω to 75Ω converters (factory fitted), this allows off-the-shelf 75Ω test equipment to be used if a 120Ω type is unavailable.

Width, Dimensions and Connectors

All 20-730-802 model versions are housed in shielded 6U height (262mm) Eurocard modules and are 160mm deep. Panel width is 2.4 Inches.

All connections to the unit are via two 50-way D-type connectors, additional ground positions for shielding are built in (four 50-way connectors are fitted to the front panel, only two are used). Other connector types are available such as BNC. Please contact the sales office for details.

Product Order Codes

Dual 16 to 1 RF Multiplexer (D-Type 120Ω)
200MHz 2-Wire Multiplexer † **20-730-802**

† A Single 32 to 1 Channel version is also available. For lower performance applications an alternative lower cost version may be ordered.

Latest Details

Please refer to our Web Site for Latest Product Details.
www.pickeringtest.com

© Copyright (2007) Pickering Interfaces. All Rights Reserved
Pickering Interfaces maintains a commitment to continuous product development, consequently we reserve the right to vary from the description given in this data sheet.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP