



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗


### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

# M2F-SBus32C

## *Myrinet-LAN/SBus interface*

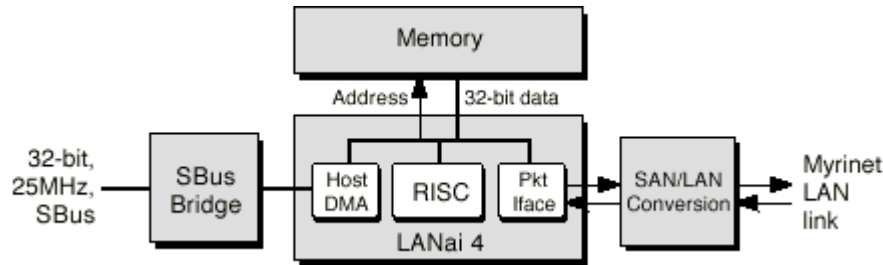

*Block Diagram*

## Specifications

**SBus Interface:** 32-bit, 25MHz, master and slave, fully compliant with SBus specifications (IEEE Std 1496), supports all SBus burst-transfer modes. Sustained, large-block, DMA performance on an UltraSPARC (25MHz SBus) is 66 MB/s to system memory and 44 MB/s from system memory.


**Interface processor:** LANai-4 RISC operating at 1.5x the SBus clock rate (37.5MHz on a 25MHz SBus).

**Interface memory:** 1MB (256Kx4B). The interface memory operates at 3x the SBus clock rate. With a 25MHz SBus clock, 300 MB/s memory bandwidth is available to support the Myrinet link, the host DMA, and the RISC processor.

**Myrinet-LAN port:** 1.28+1.28 Gb/s or 0.64+0.64 Gb/s data rates selected automatically by the cable type. [LVDS or PECL signal levels](#) selected automatically (LVDS only at the 1.28+1.28 Gb/s data rate).

**Physical characteristics:** Single-width SBus board, ~5 Watts.

**Myricom-supported software:** Both GM and MyriAPI software, which can be downloaded from the [Software & Customer Support page](#) are supported under Solaris on UltraSPARCs. Only the MyriAPI software is available under SunOS.

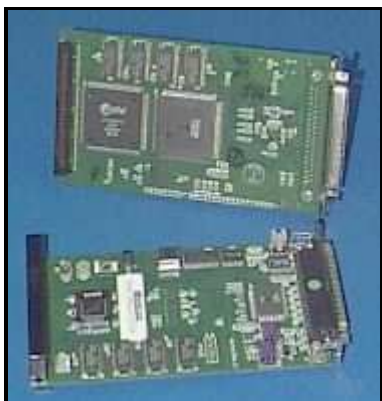

*M2F-SBus32C (two boards, to show both sides).*



*Last updated: 1 July 1999*



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)