



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗


LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

BarcoMed 3MP2FH

Dual-head 3MP medical imaging board

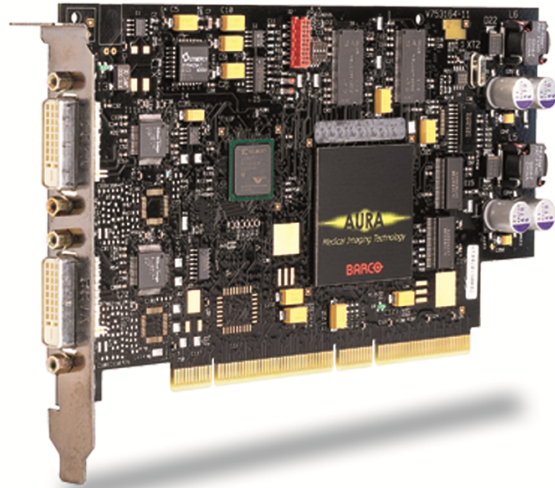

The BarcoMed® 3MP2FH is an ultra-fast digital medical imaging board, featuring Barco's proprietary 10-bit driving scheme.

The display controller's 1024 simultaneous shades of gray allow for an accurate diagnosis on high-bright grayscale displays and bring DICOM-conformance to flat panel displays with a resolution of 2048 x 1536.

The BarcoMed® 3MP2FH features AURA technology for ultra-fast image loading and makes use of the VESA standard dual Digital Visual Interface (DVI) with Digital Display Control (DDC) protocol. The dual-head board operates under Windows NT, Windows 2000 and Windows XP.

BARCO

Visibly yours

Product specifications**BarcoMed 3MP2FH**

Bus	PCI 2.1 & 2.2, universal signaling
Bus clock speed	33 Mhz
Bus width	32 bit
Power consumption	< 15 Watt
Form factor	106 x 197 x 16 mm (4.2 x 7.6 x 0.6")
Operating system	Microsoft Windows NT4, 2000, XP
Platforms	Pentium class and up
Display configuration	Single- or dual-head, portrait or landscape
Graphics processor	Proprietary AURA technology
Display memory	32 MB
VGA	Integrated VGA controller, also compatible with external VGA cards
Pixel clock rate	200 Mhz
Look up table	10 bits in / 10 bits out
Electrical standard	Dual DVI complying to VESA DVI Rev. 1.0 spec
Supported resolutions / refresh rates	2048 x 1536 @ 60 Hz 1536 x 2048 @ 60 Hz VGA at boot-up
Connectors	two DVI connectors (one per head)
Operational temperature	+10°C to +60°C (50°F to 140°F)
Storage temperature	-40°C to +85°C (-40°F to 185°F)
Operational humidity	80%
Storage humidity	100%
EMI	FCC class A, CE EN 55022 A, EN 50082-1

Last updated: 21 jan 2014
Technical specifications are subject to change without prior notice.
Please check www.barco.com for the latest information.





Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com