



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?


Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com



PB-DAC3

4-Channel Optoisolated 12-bit D/A MODPACK

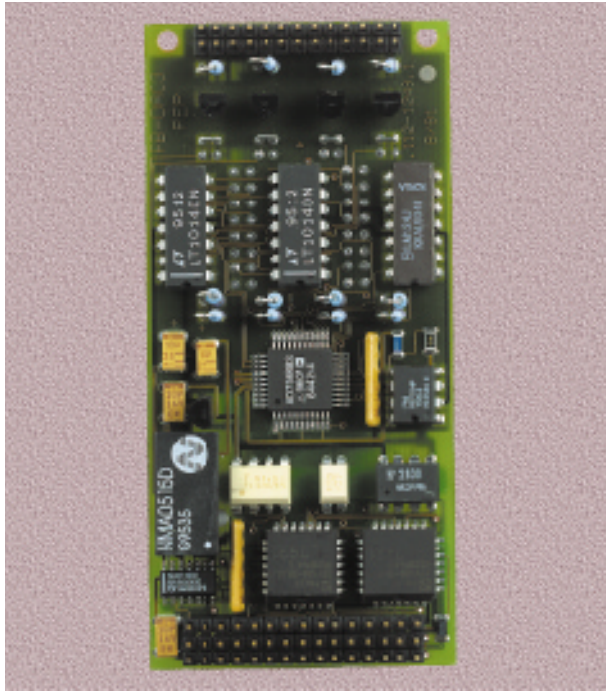

Characteristics


Function: 4 optoisolated outputs
 Output Voltage: 0..10V DC, ±10V DC
 Output Current: 0..20mA
 Output Frequency: 20kHz (max.)

D/A Converter

Resolution: 12-bit (unipolar)
 Linearity Error: ±0.75 LSB
 Rise Time: 0.4V/μs
 Reference Voltage: 0..10V DC (programmable in 2.44mV steps)

Common

Isolation: 500V DC between I/O and system
 Power Req.: +5V DC (±5%), 290mA typ.
 Temp. Ranges: 0°C to +70°C
 -40°C to +85°C (opt. E2)
 -55°C to +85°C (storage)
 Humidity: 5% to 95% non-condensing

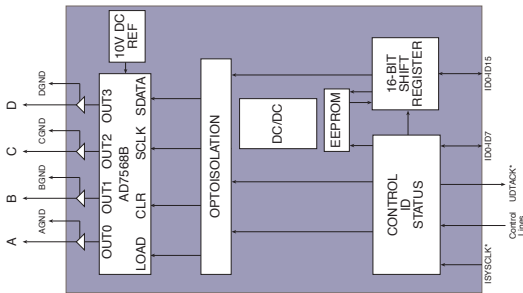

A 4 channel 12-bit optoisolated D/A piggyback for use with PEP's range of dedicated carrier boards. All outputs are independent and galvanically isolated from the system supply. Bipolar or unipolar conversion may be jumper selected and the choice between voltage conversion or current conversion is indicated by the version being ordered.

Stability and linearity are assured across the complete operating temperature range while board specific calibration data remain stored in an on-board 128 byte EEPROM for software gain/offset correction.

Product	Description	Order No.
PB-DAC3	4 channel optoisolated piggyback for analog outputs in the range 0..10V or ±10V for use with PEP's range of dedicated carrier boards	3120
PB-DAC3	4 channel optoisolated piggyback for analog outputs in the range 0..20mA for use with PEP's range of dedicated carrier boards	3121

U.S.A.: Tel.: ++1 412 921 3322
U.K.: Tel.: ++44 (0) 1273 44 11 88
France: Tel.: ++33 (0) 139 16 10 30
Belgium: Tel.: ++32 (0) 2 461 04 08

Holland: Tel.: ++31 (0) 76 521 7957
Sweden: Tel.: ++46 (0) 8 756 72 60
Poland: Tel.: ++48 (0) 2 28 23 55 73
S. Korea: Tel.: ++82 (0) 25 58 08 38

PEP Modular Computers GmbH
 Apfeltrangerstr. 16
 D-87600 Kaufbeuren
 Tel.: ++49 (0) 8341 803 - 0
 Fax: ++49 (0) 8341 803 - 499
 Internet: <http://www.pep.com>
 E-mail: info@pep-kaufbeuren.de





Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com