ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Abaco Systems / VMIC VMIVME-3118-000* at our website: ***Click HERE***

VMIVME-3118
Scanning 16-bit Analog-to-Digital Converter Board with Programmable Gain Memory

- 64 differential or single-ended inputs
- 16-bit A/D conversion
- 52 kHz conversion rate
- Program-selectable scanning of 16, 32, 48, or 64 channels
- Continually digitizes all input channels and stores the results
- Six operating modes
  - — Autoscanning mode
  - — Single channel random polling mode
  - — Timed burst mode
  - — Locally triggered burst mode
  - — Remotely triggered burst mode
  - — Gain loading mode
- Programmed VMEbus interrupts
- User-programmable interval timer
- Software-programmable gain 1, 10, 100
- External trigger to synchronize multiple boards simultaneously
- Jumper-selectable A/D ranges of 0 to +5 V, 0 to +10 V, ± 2.5 V, ±5 V, and ±10 V
- Optional low pass filter
- Overvoltage protected inputs
- 1,024-word data buffer (16-word deep buffer x 64 channels)
- Selectable output coding
- Powers up in autoscanning mode with gain of 1

APPLICATIONS

- Factory automation and instrumentation
- Process control
- Laboratory instrumentation
- Machine monitoring
- Data acquisition

INTRODUCTION — This product is designed to support 64 channels of differential or single-ended wide range (±25 mV to ±10 V) analog inputs.

The board supports the following operating modes which are described below:

Autoscanning
Single Channel Random Polling
Timed Burst
Locally Triggered Burst
Remotely Triggered Burst
Gain Loading

1,024 dual-port Data Registers provide storage for continuous scanning of all channels. The scanning modes are executed automatically at power up, system reset, or are entered under program control. The dual-port registers allow VMEbus access at any time to read the latest stored data.

Channel gain can be jumper selected as x1, x10, or x100, or can be software programmed individually for each channel. Scan rate is programmable up to 52 kCPS (thousand channels/sec). Low pass input filters are available.

A functional block diagram is provided in Figure 1 and the Ordering Options are provided on the first page of this specification.

The VMIVME-3118 employs an unbuffered 64-channel input multiplexer. Systems Integrators must consider source impedances and cable length when using this board unless the

NO PHOTO AVAILABLE

Ordering Options

November 21, 1994 800-003118-000 F	A	B	C	–	D	E	F
VMIVME-3118**	–	0		–			

A = Input Filter Options
0 = No Filter
1 = 10 Hz (-3 dB)
2 = 50 Hz (-3 dB)
3 = 100 Hz (-3 dB)
4 = 500 Hz (-3 dB)
9 = 1.6 kHz (-3 dB)

B = 0 (Option reserved for future use)

C = Input Options
0 = 64 Diff/SE Analog Input Channels
1 = 64 SE Analog Inputs with Improved High Frequency Rejection

Connector Data

Style	Recommended Connecting Component	P3 and P4 I/O Connectors
64-pin IDC	Mating Connector (64-pin) Strain Relief (for 64-pin Connectors)	Panduit 120-964-435E Panduit 100-000-032
96-pin Discrete Wire	Mating Connector (96-pin Discrete) Female Crimp Contacts (96-pin Discrete)	AMP 925486-1 AMP 530151-6*
	Connector Housing (For 96-pin Connectors)	Harting 09 03 096 0501
96-pin IDC	Mating Connector (96-pin Mass Terminated)	ERNI 913.031
	0.033-inch Ribbon Cable (96-pin Mass Terminated)	ERNI 913.049
	Strain Relief Insert (0.033-inch Ribbon Cable)	Harting 09 02 000 9912
	Connector Housing (For 96-pin Connectors)	Harting 09 03 096 0501
	PC Board I/O Connector Part Number	Panduit 101-096-033A

*AMP crimp tool part number 90301-2.
**-9BC must be ordered when VMIC signal conditioning products are coupled with the VMIVME-3118.

For Ordering Information, Call:
1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859
E-mail: info@vmic.com Web Address: www.vmic.com
Copyright © June 1989 by VMIC
Specifications subject to change without notice.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

VMIVME-3413, VMIVME-3417A, VMIVME-3418 or other signal conditioning is used. If these signal conditioning products are utilized to be incorporated into a system with VMIVME-3118, then the VMIVME-3118-9BC must be ordered. In those applications where no signal conditioning board is used or where extremely low noise is required, VMIC recommends the VMIVME-3122.

FUNCTIONAL CHARACTERISTICS

(Typical at +25 °C and rated power supplies, unless otherwise stated.)

Operating Modes:

Autoscanning Mode: This default operating mode is selected by a reset operation, or by clearing both CSR Mode control bits. All active channels are scanned continuously in this mode, and any channel value can be read at any time.

Single Channel Random Polling Mode: Each input channel is accessed individually, and the digitized channel value is read from the Converter Data Register (CDR).

Timed Burst Mode: A single data burst (scan of all buffer locations) is acquired at the end of a programmed interval, or the process can be repetitive.

Locally Triggered Burst: A single burst is initiated through the Control and Status Register (CSR).

Remotely Triggered Burst: A single data burst (scan of all enabled channels) is initiated through the P2 connector by an external TTL trigger source.

Gain Loading Mode: If the board is jumper configured for automatic gain control, gain loading is performed by first selecting the gain loading mode, and by then loading the gain code for each channel into a 64-location gain buffer. The gain codes (0 for x1, 1 for x10, 2 for x100) for all channels are initialized to "zero" (gain = x1) automatically after a reset operation.

Channel Autogain: The unique gain code for each channel is loaded from the VMEbus into a gain buffer (see Gain Loading Mode). The assigned code is retrieved from the buffer in real-time for each channel acquisition.

Synchronization: A single scan, or burst, can be initiated by an external TTL trigger through the P2 connector (Remotely Triggered Burst), or locally through the CSR (Locally Triggered Burst). Either event generates a P2 TRIGGER output, which can be used to synchronize up to 15 boards.

Board Address: Jumper located on word boundary anywhere in the short I/O A16 space, or the standard A24 space. Required word boundary is 1000h in either space.

VMEbus Access: Response to address modifiers is jumper-selectable as:

Short I/O A16 or standard A24 address space
Supervisory or user privilege, or both
Data or program access

VMEbus Compliance: This product complies with VMEbus Specification ANSI/IEEE STD 1014-1987 IEC 821 and 297 with the following mnemonics:

A24/A16:D16/D8 (EO) DTB Slave
Interrupter I(1 to 7) ROAK (DYN)
Interrupter Vector: D08 (O) (DYN)
6U form factor

VMEbus Interrupt: An interrupt request can be generated at the end of a buffer scan in all modes except autoscanning mode. Response vectors are controlled through Interrupt Vector Registers.

Data Ready Flag: A data ready flag in the CSR is set when the data buffer is filled (endscan) or half-filled (midscan).

Interval Timer: Bursts intervals of up to 536 seconds are provided by a programmable interval timer.

Reset Operations: Board reset occurs in response to a system reset or by setting a RESET bit in the CSR. For programming-free initial operation, a reset operation automatically establishes the following default conditions:

Autoscanning Mode
64-Channel block size
64-Channel data buffer
Channel Gain = x1

PGA: Channel gains of x1, x10, and x100 are selected through a Programmable Gain Amplifier (PGA). PGA gain can be jumper configured with a single gain for all channels, or it can be controlled in real-time with unique gains assigned for each channel. See *Channel Autogain*.

Panel Indicator: Program-controlled front panel LED is energized during reset, and is extinguished through the CSR.

Board Identification: A Board Identification Register (BIR) contains the VMIVME-3118 identification code

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

INPUT CHARACTERISTICS

Number of Input Channels: 64 differential or single-ended channels

Full-Scale Input Ranges: ±2.5 V, ±5 V, ±10 V, 0 to +5 V, 0 to +10 V; jumper selectable

Channel Gain: Program selected or jumper selected as: x1, x10, or x100. See *Channel Autogain*.

Full-Scale Input Range: ±25 mV to ±10 V

Input Offset Voltage:
(0.3 + 6/G + 0.6 k) mV;
where: G = PGA gain
K = Sample rate per channel, KSPS
E.g.: The maximum input offset voltage with a PGA gain of x10 and a sample rate of 0.5 KSPS per channel would be 1.2 mV (0.3 + 0.6 + 0.3)

Input Bias Current: 50 nA maximum at zero input

Input Impedance: 5 MΩ in parallel with 50 pF

Input Noise: 0.3 mV RMS, DC-100 Hz

Overvoltage Protection: ±40 V, maximum

Input Filters: Optional low pass single-pole filters:

-3 dB at 10 Hz
-3 dB at 50 Hz
-3 dB at 100 Hz
-3 dB at 500 Hz
-3 dB at 1.6 kHz

TRANSFER CHARACTERISTICS

Resolution: 16 bits

Input Sampling: Sequential, starting at channel 00

Integral Nonlinearity: ±0.005 percent maximum; from best straight line

Differential Nonlinearity: ±0.0015 percent; typical at MSB transition

Quantization Error: ±1/2 LSB

Missing Codes:
14-bit 0 percent maximum
15-bit .15 percent maximum
16-bit .6 percent maximum

Conversion Cycle Time[1]**:** 19 µs, total time for acquisition, A/D conversion, and storage

1. Each channel is sampled during the A/D conversion of the preceding channel.

A/D Conversion Rate: 52 KSPS (thousand samples per second)

Channel Sample Rate (Maximum): 3.25 KSPS (52 KSPS ÷ number of channels in scanning block, 16 channels minimum)

Timed Burst Interval: 305 µsec to 536 seconds

Interchannel Crosstalk:

Filter Option	Cross Talk (Maximum) (Adjacent Channels)	Cross Talk (Maximum) (Alt. Channels)
None	-80 dB	-110 dB
10 Hz	-60 dB	-100 dB
50 Hz	-70 dB	-110 dB
100 Hz	-70 dB	-110 dB
500 Hz	-70 dB	-110 dB
1.6 kHz	-77 dB	-110 dB

Common-Mode Voltage: CMV = ±9 V; maximum input voltage = ±11 V on either input line for linear operation.

Common-Mode Rejection: CMRR = 82 dB, DC to 100 Hz, 64-channel block size.

Data Coding: Program selectable as two's complement, or straight/offset binary.

ACCURACY

PGA Nonlinearity, DC:
G=1: ±0.005 percent FSR (Full-Scale Range)
G=10: ±0.005 percent FSR
G=100: ±0.01 percent FSR

Gain Accuracy (Including Nonlinearity):
G=1: ±0.008 percent FSR
G=10: ±0.06 percent FSR
G=100: ±0.06 percent FSR

STABILITY (Over Temperature Range)

PGA Offset Voltage Drift: ±(3 + 15/G) µV/°C

System Accuracy Drift:
G=1: ±20 PPM/°C
G=10: ±50 PPM/°C
G=100: ±90 PPM/°C

Total Noise: 4,500 µV maximum at GAIN = 1 and FS = ±10 V

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

DATA BUFFER MEMORY

Buffer Size: 16 to 1,024 contiguous 16-bit data words, in six equal ratios of 2:1; program controlled.

Block Size: 16, 32, 48, or 64 channels; program controlled.

VMEbus Access: D8 or D16

Availability: Accessible at any time from the VMEbus. Buffer and block sizes are controlled through a Buffer Control Register (BCR).

PHYSICAL/ENVIRONMENTAL

Temperature:
0 to +55 °C, operating (standard VME slot)
40 to +85 °C, storage

Humidity: 10 to 80 percent relative, noncondensing

Altitude: Operation to 10,000 ft (3,048 m)

Cooling: Forced air convection (standard VME slot)

Dimensions: Double height Eurocard (6U) board, 160 x 233.35 mm

Input Connectors (P3, P4): 96-pin DIN connector, center row grounded (accepts 64- and 96-pin mating connectors).

Power Requirements: 4.0 A (maximum) at +5 VDC

TRADEMARKS

The VMIC logo is a registered trademark of VMIC. Other registered trademarks are the property of their respective owners.

APPLICATION AND CONFIGURATION GUIDES — The following Application and Configuration Guides are available from VMIC to assist the user in the selection, specification, and implementation of systems based on VMIC's products.

Title	Document No.
Digital Input Board Application Guide	825-000000-000
Change-of-State Board Application Guide	825-000000-002
Digital I/O (with Built-in-Test) Product Line Description	825-000000-003
Synchro/Resolver (Built-in-Test) Subsystem Configuration Guide	825-000000-004
Analog I/O Products (with Built-in-Test) Configuration Guide	825-000000-005
Connector and I/O Cable Application Guide	825-000000-006

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

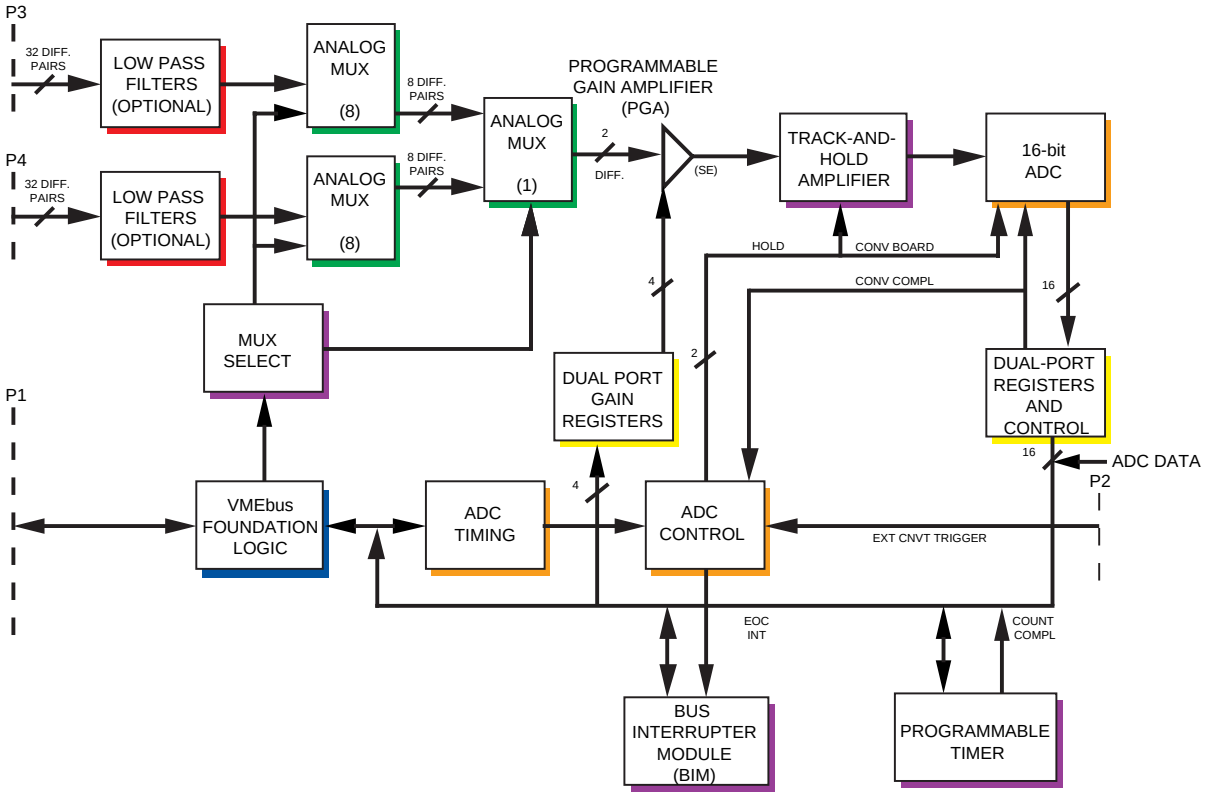


Figure 1. VMIVME-3118 Functional Block Diagram

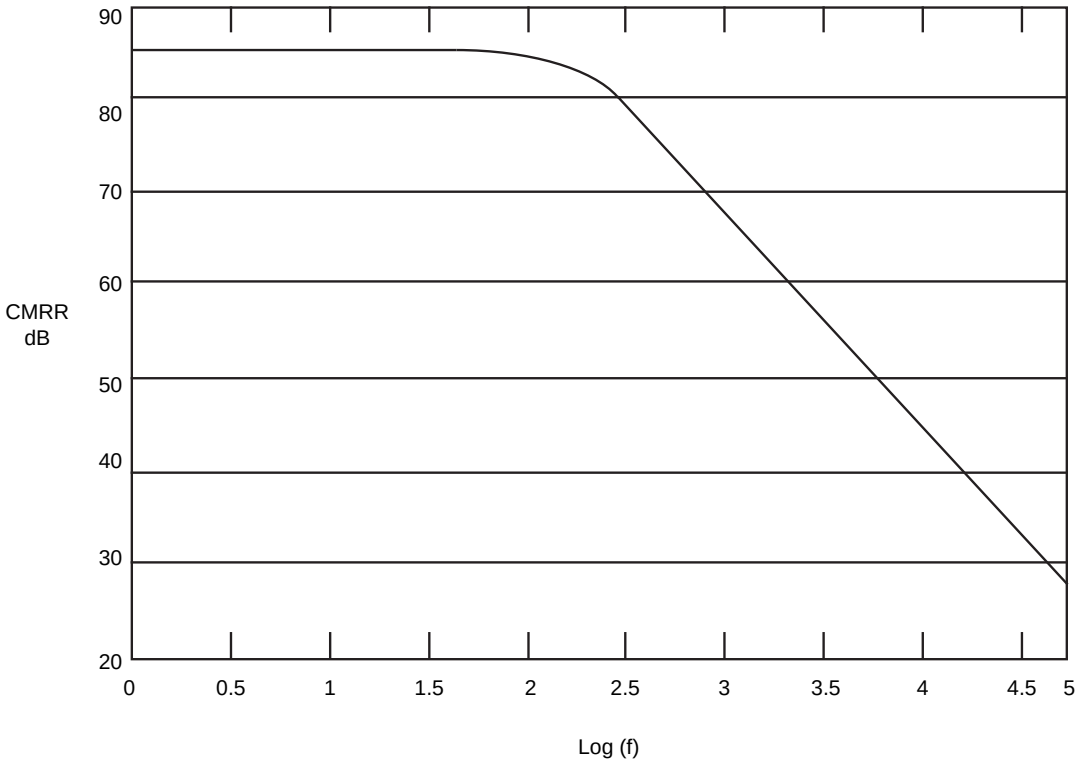


Figure 2. VMIVME-3118 Common-Mode Rejection Ratio Versus Frequency

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP