



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Microprocessor-based Limit Indicator SGmC

The microprocessor-based SGmC monitors limit value alarms (temperature, pressure etc.).

The SGmC accepts following inputs:

All common Thermocouples, RTD or standard signals (DC 0...10V or 0/4...20mA).

On exceeding the adjusted limit value, a relay (changeover) is switched, so that other alarm devices can be controlled.

SGmC are preferred for measuring temperatures in solids, bearings and molding tools, for example in the plastics industry, packaging machines, rt.

Handling and Display Elements

8 DIP-switches inside the housing to configure the SGmC

3 rotary switches on the front to adjust the limit value

1 button on the front to reset the self-hold




Type SGmC

Measurement inputs

Measurement inputs	measuring ranges
PT 100	DIN EN 60751 -200... 0°C
PT 100	DIN EN 60751 0... 400°C
PT 100	DIN EN 60751 0... 600°C
Fe-CuNi (L)	DIN EN 43710 0... 800°C
Fe-CuNi (J)	DIN EN 60584 0... 800°C
Cu-CuNi (T)	DIN EN 60584 0... 400°C
NiCr-Ni (K)	DIN EN 60584 0...1370°C
NiCr-CuNi (E)	DIN EN 60584 0... 700°C
Pt10 Rh-Pt (S)	DIN EN 60584 0...1760°C
Pt13 Rh-Pt (R)	DIN EN 60584 0...1760°C
Current cont.	0... 20 mA
Current cont.	4... 20 mA
Voltage cont.	0... 10 V

Features

- **Measurement inputs freely configurable:**
Resistance thermometers (PT 100);
Thermocouples (Type E, K, L, R, S, T);
Standard signals (0/4...20 mA; 0...10 V)
- Rotary switches to adjust the limit value
- Time-delayed switching,
- **Alarm output:**
Relay (changeover) max.3A, AC 230 V
- **Power supply:**
115/230 V AC or 24 V DC
- **Housing:** 22,5mm (DIN-rail mountable device)

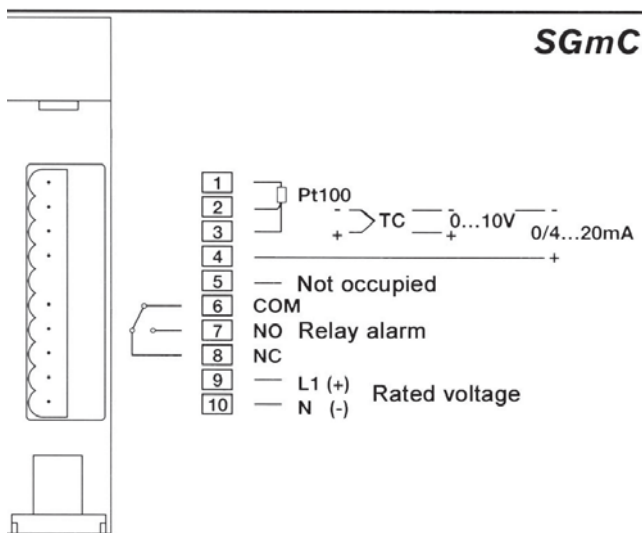

01.2005

Technical data

Inputs

Thermocouple

Built-in internal compensation point and protection against breakage and incorrect polarity.

Re-calibration not required for a line resistance of up to 50 Ohm.

Calibration accuracy: $\leq 0,25\%$

Pt 100 DIN EN 60751

2- or 3-wire connection possible. Built-in protection against sensor breakage and short-circuit, maximum permissible line resistance

by 3-wire connection: 80 Ohm (Z-Barrieren)

Sensor current: $\leq 0,15 \text{ mA}$

Calibration accuracy: $\leq 0,2\%$

Standard signals

DC 0/4...20mA, internal resistance: < 10 Ohm

DC 0...10 V, internal resistance: > 100 k-Ohm

Calibration accuracy: $\leq 0,2\%$

Linearity error: $\leq 0,2\%$

Ambient temperature effect on measurement range: $\leq 0,01\% / \text{K}$

Alarm output:

Relay (changeover) max. AC 230 V, 3 A at cos-phi = 1

EMC

Tested according to EU-directives 89/336 (CE-Tested)

Emission: EN 50 081-2

Interference resistance: EN 50 082-2

Power supply

AC 230 V (internal jumper AC 115 V), $\pm 10\%$, 48...62 Hz

DC 24 V, $\pm 20\%$, premissible residual ripple max. 5% r.m.s.

Connections

Screw terminals, Protection mode IP 20 (DIN 40 050), Insulation class C

Premissible operating conditions

Operating temperature: 0...+50 °C / 32...122°F

Storage temperature: -30...+70 °C / -22...158 °F KWF DIN 40040

Housing

Format: 22,5 mm x 75 mm x 105 mm (DIN-rail mountable device)

Material: ABS, self-extinguishing, non-drip, UL 94-V0


Protection mode: IP 20 (DIN 40 050)

Weight: Approx. 170 g

Type code / Order-Nr.:

SGmC-10-0-1-7 (Power supply: 230 V AC; internal jumper AC 115 V)

SGmC-10-0-1-8 (Power supply: 24 V DC)

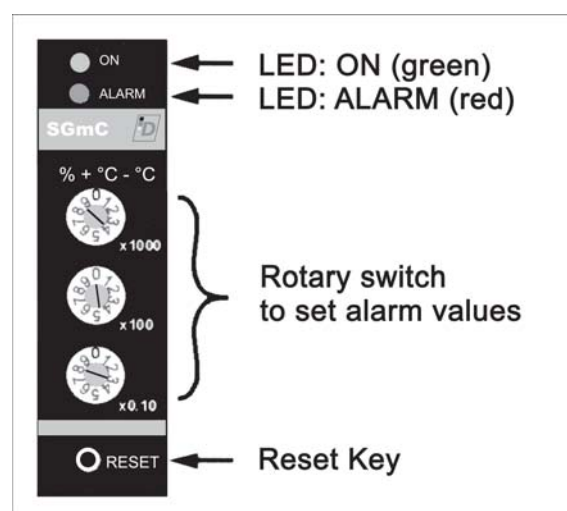



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com