ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *ABB / HC Power HC3011-C1205* at our website: *Click HERE*

HC3000 SERIES
3000 Watt Hi-reliability MOSFET Switchers

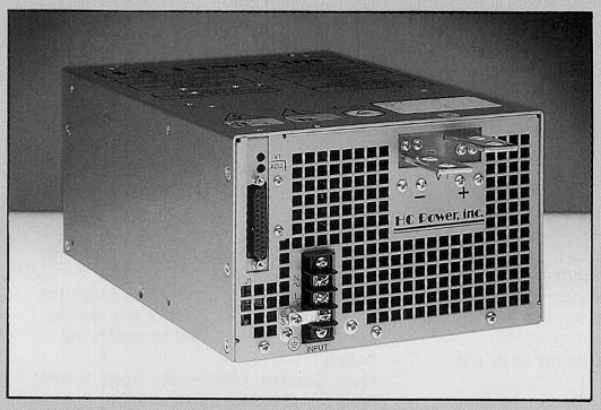


- .99 Power Factor
- Power MOSFET Design
- Current Mode Control
- Unique Two-Stage Current Limit
- Absolute Current Sharing
- No Minimum Load Required



T1 <0.5 Sec
T2 >10 MSec
T3 >5.0 MSec
T4 ≥ 20 MSec
T5 <5.0 MSec after application of remote ON/OFF Control or Overtemp

Power fail sink current = 50 MA. Source current from 3.3K pull up resistor to +5V if desired.

*Power fail signal is floating (open collector and emitter thru an optical coupler) and can be referenced as desired.

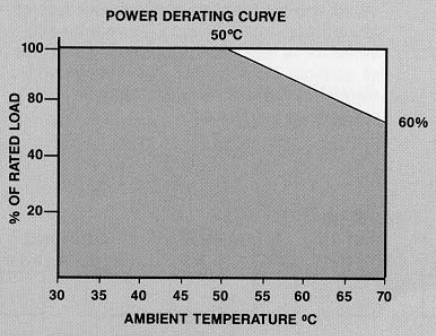

Dedicated to the design & manufacture of high power switchers.

HC3011 & HC3052 SERIES	3000 WATTS, NOMINAL, 1 OR 2 OUTPUTS			
OUTPUTS	MAIN 1 VDC@A	MAIN 2 VDC@A	V3 VDC@A	V4 VDC@A
SINGLE	24 @ 125 28 @ 107 36 @ 84 48 @ 63	N.A.	N.A.	N.A.
DUAL	24 @ 63 28 @ 54 36 @ 42 36 @ 31	24 @ 63 28 @ 54 36 @ 42 48 @ 31	N.A.	N.A.

(1) = Other output voltages available.

All specifications and data subject to change without notice.

HC Power, inc.

©Copyright 1993, HC Power, Inc.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

HC3011 AND HC3052 SERIES SPECIFICATIONS

INPUT SPECIFICATIONS
AC Input Range: 180-264 VAC, 47-63 Hz, single phase. (Note: Supply will operate down to 90 VAC if derated to 1500 watts). Will operate on 400 Hz. Check factory.
DC Input Range: 250-380 VDC.
Inrush current: ≤nominal full load running current at 230 VAC.
Fusing: All units are fused internally.
Line Transient: Meets ANSI C62.41 (Formerly IEEE-587-1980)
Line Filtering: Complies with Level A of FCC Docket 20780 and VDE 0871.
Power Factor: ≥.99 at full load.
Total Harmonic Distortion: <5%.

OUTPUT SPECIFICATIONS
Output Power: 3000 Watts.
Number of Outputs: 1 or 2 (See table).
Voltage Adjust Range: ±10%.
Line Regulation: 0.2% over entire AC input range.
Load Regulation: ±0.2% no load to full load.
Ripple and Noise: (PARD) 1% when measured at the power supply terminals with a 20 MHz scope.
Hold Up Time: The outputs will remain in regulation for 30 milliseconds after loss of power within the specified operating range.
Turn On Delay: Under full load conditions all outputs will be in regulation in less than 1 second at 230 VAC line input.
Transient Response: The outputs will recover to within 1% of the initial setting within 100 microseconds following a step load change of 25% at a slew rate of 5 amps per microseconds. No overshoot or undershoot at turn on or turn off.
Output Polarity: The outputs are floating and may be referenced as desired by the user. Outputs may be operated up to 100 volts off chassis ground.
Minimum Load: No minimum load is required. Under no load condition the outputs will not go above the regulation band.

LOGIC AND CONTROL
Remote Sense: The outputs have remote sense which will compensate for up to 500 mV load cable loss. The outputs are sensed internally if a sense line is open. No damage will result if the sense lines are reversed or shorted.
Remote Margin: ±5%. (See installation instructions.)
Remote Inhibit: Standard.*
AC Power Fail Warning: A signal is provided at least 5 milliseconds before loss of any output voltage. Signal will not be activated for at least 20 milliseconds after loss of nominal AC power. Signal is provided through a Form C relay and may be referenced as desired.
Current Sharing: This feature is standard in this supply. Outputs of similar supplies will current share within ±5% from no load to full load when the supplies are interconnected by only a single wire.
Current Monitor: A calibrated voltage proportional to the output current is provided. 5 volts (±5%) at full load. Optional bar graph indicator is available.
DC-OK: A Form C relay is activated when the output changes ±5% from nominal. (10% for outputs of less than 5 volts.)

PROTECTION
Over Voltage Protection: If the output exceeds nominal by 15% (±5%) the OVP circuit will be activated and will turn the supply off. The AC input or the remote on/off must be recycled to restart the supply.
Over Current: Unique two stage current limit circuit allows for momentary overloads but will shut the supply down prior to damage to backplanes and wiring.
Thermal Shutdown: Supply will shut down if the internal temperature reaches an unsafe operating level. Restart is automatic when the supply returns to the normal operating range.
Reverse Polarity: The output is protected against reverse voltage up to the maximum current rating.

*Open or Logic 1 = On
Ground or Logic 0 = Off
Other configurations available.

ORDERING INFORMATION

Model **HC30** [ ]

NUMBER OF OUTPUTS	VOLTAGE V1	VOLTAGE V2	OPTIONS (In Alpha Order)	
[ ]	[ ]	[ ]	[ ]	[ ]

See Voltage Code Table


1 = Single Output
5 = Dual Output


Option Codes: D = DC-OK
M = Low Current Alarm
R = Reverse airflow

Note: HC POWER can configure power supplies for your specific requirements. Please contact the factory.

VOLTAGE CODE TABLE

5 = 24 Volts	6 = 28 Volts	7 = 36 Volts	8 = 48 Volts

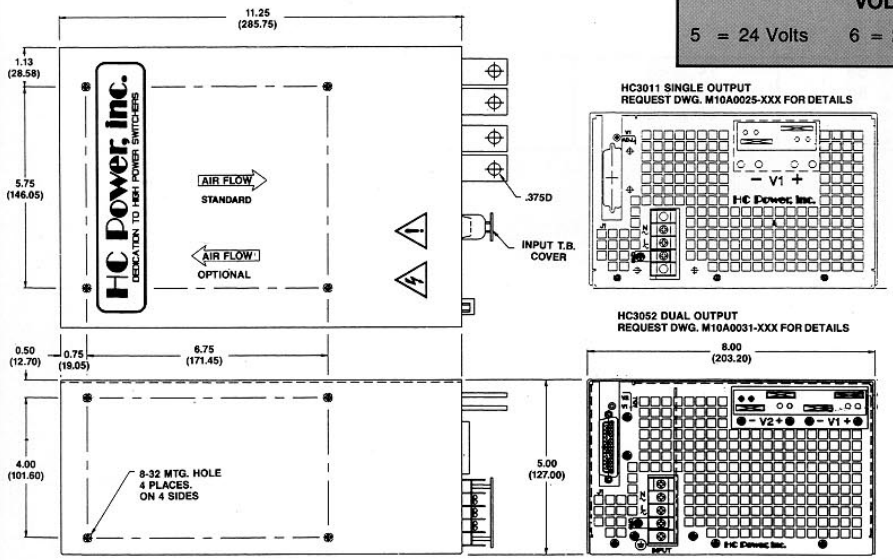



J1-1 = DC OK N/C
J1-2 = DC OK Com Optional
J1-3 = DC OK N/O
J1-4 = Power fail pull up
J1-5 = Enable pull up
J1-6 = Power fail
J1-7 = Power fail rtn.
J1-8 = Remote enable
J1-9 = Enable return
J1-10 = Current monitor V1
J1-11 = Margin ref. V1 optional
J1-12 = Margin V1 optional
J1-13 = Current share V1
J1-14 = (+) 5V logic
J1-15 = (−) sense V1
J1-16 = (+) sense V1
J1-17 = / / / /
J1-18 = (−) sense V2
J1-19 = (+) sense V2
J1-20 = Logic com. (1)
J1-21 = Logic com. (2)
J1-22 = Margin ref. V2 optional
J1-23 = Current share V2
J1-24 = Margin V2 optional
J1-25 = Current monitor V2

HC3011 SINGLE OUTPUT
HC3052 DUAL OUTPUT
WEIGHT 17 LBS.

HC Power, inc.
17032 Armstrong Avenue, Irvine, CA 92714-5716 • Phone: (714) 261-2200 • FAX (714) 261-6584

Printed in USA

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP