



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Encapsulated Power Supply

Model **PS10/PS24**

Description

The Models PS10 and PS24 power supplies provide a versatile excitation source for low level or high level strain gage type sensors, 2 wire transmitters, loop powered meters, or for any instrumentation requiring 10 or 24 Volts DC operation. The conservative design and rugged construction contributes to the MTBF in excess of 100,000 hours. A 4-40 threaded insert is molded into the power supply's case to provide a means of securing the module without stressing the connection pins. Screw terminals are provided for connection using either crimp lugs or stripped wires.



Features

- 10 or 24 Volt DC output
- Regulation line and load 0.02% and 0.05%
- Chassis mounting with terminal barrier strip
- Short circuit protection
- AC operation; 115, 220, 240 VAC, 50 to 440 Hz


Applications

- 2 Wire transmitters
- Loop powered meters
- Strain gage type sensors
- Instrumentation requiring 10 or 24 volts DC operation

Specifications

Voltage output tolerance	Factory set at $\pm 1\%$ (fixed)
Temperature Coefficient	0.02%/°C (typical)
Input Isolation	50 Megohms
Operating temperature	-13°F (-25°C) to 160°F (+71°C)
Storage temperature	-13°F (-25°C) to 185°F (+85°C)
Input voltage and frequency	115, 220, or 240 VAC; 50 to 440 Hz
Ripple & noise	1.0mV RMS
Current Output	
10VDC	150mA or 500mA
24VDC	100mA or 300mA
Regulation line and load 100, 150, 300mA	0.1% line & 0.1% load
Regulation line and load 500mA	0.02% line 0.05% load


Dimensions

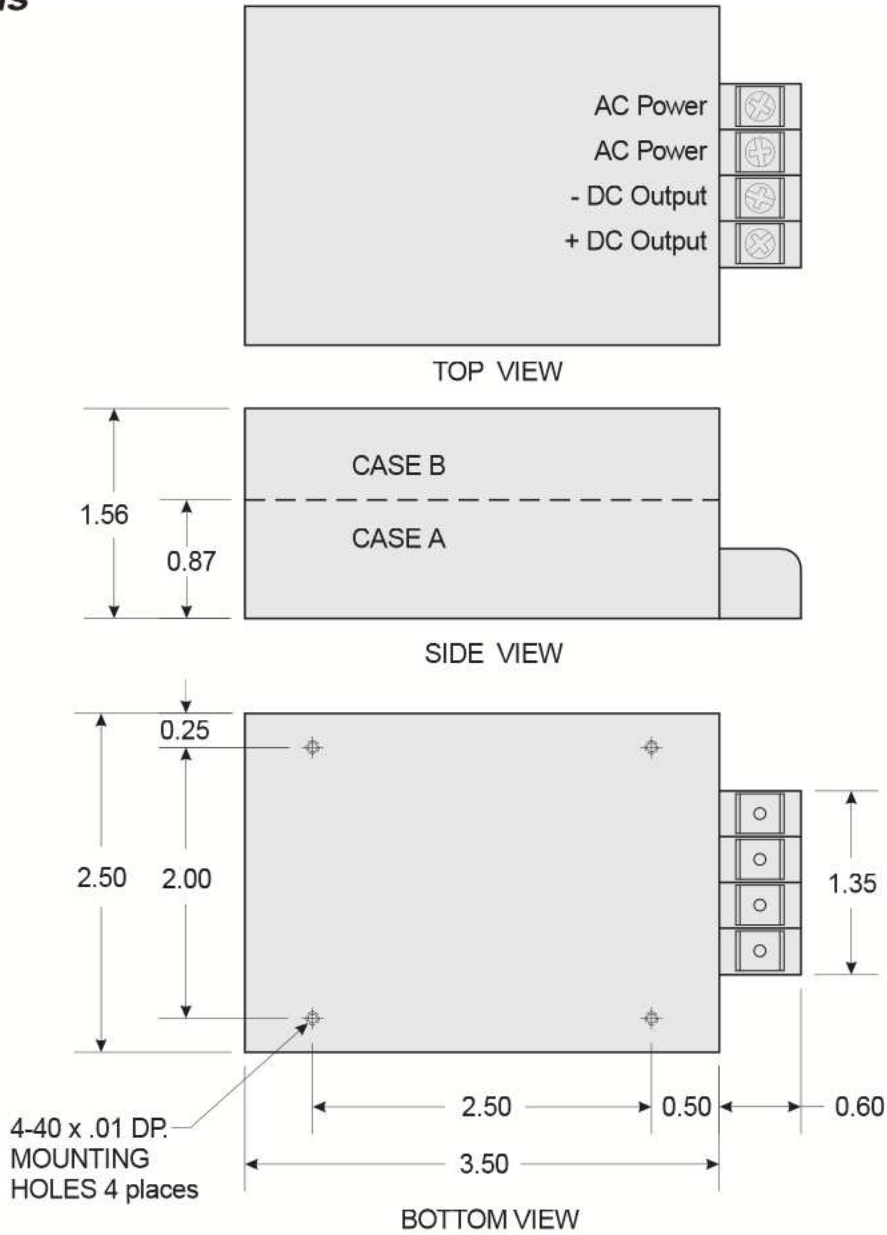

Specifications are subject to change without notice.

How to order

Example: PS 24 - 100 115

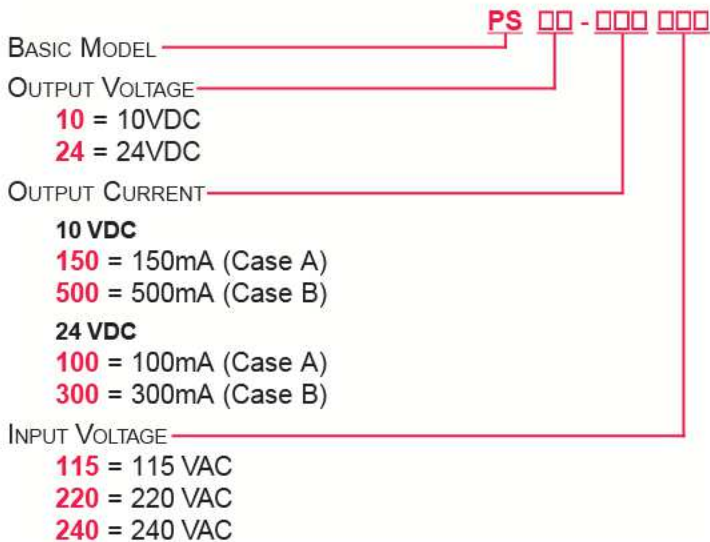

235 West Chestnut Avenue, Monrovia, CA 91016-3315
 626-358-4578 • 800-423-7123 • Fax 626-358-3546
 E-mail: precise@earthlink.net
 Website: <http://www.precisesensors.com>



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com