



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Liquid Light Guides



Various Liquid Light Guides

If you need high light throughput anywhere in the UV to NIR, our Liquid Light Guides are the smart choice. They are more efficient and less expensive than Fused Silica Fiber Bundles, and you don't have to worry about fiber breakage! We've expanded our line to include DUV light guides, which transmit down to 220 nm and bifurcated models for selected wavelength ranges.

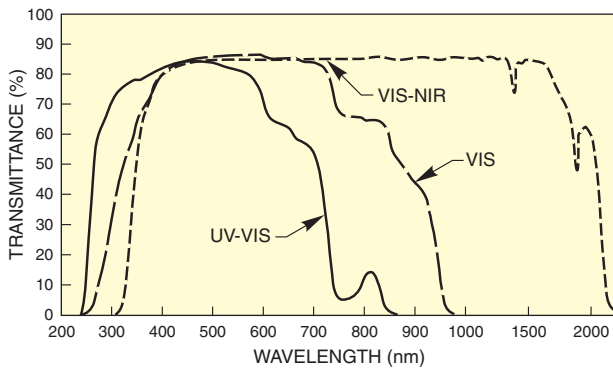


Fig. 1 Typical transmittance of selected Liquid Light Guides

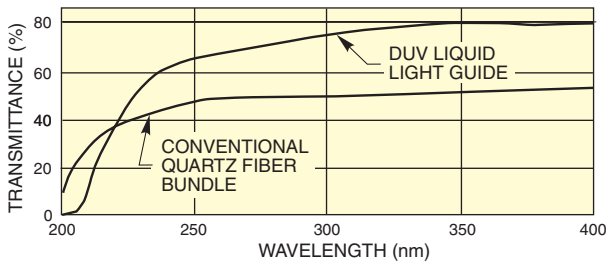


Fig. 2 Typical transmittance of DUV Liquid Light Guides compared to conventional quartz

Bifurcated Models

For dual source applications, we offer bifurcated liquid light guides. The single end does not meet into a common circular core; the two cores are stacked in the common end (see Fig. 3). Each leg has an active core of 3 mm and a length of 39 or 79 inches (1 or 2 m). We can also supply trifurcated liquid light guides; contact us for details.

- Excellent throughput – large core diameters, no packing losses, high N.A.
- DUV models provide alternative to fibers for wavelengths down to 220 nm
- Single branch and bifurcated models



Fig. 3 Front view of common end of a bifurcated liquid light guide. The end does not merge into a single circular core.

Large Acceptance Angles

The acceptance angle of our liquid light guides is significantly higher than for the fused silica fiber bundles described on page 252. This means you get significantly more throughput from the same core diameter. The geometrical extent (a measure of fiber optic light gathering capability) of a 3 mm diameter UV-VIS liquid light guide is 8.5 mm²; that of a 3.2 mm diameter fused silica fiber bundle is 1.1, and that of a 3.2 mm diameter glass bundle is 7.6.

Rugged Construction

These light guides are robust and long-lived in normal use. To ensure long life, the temperature at the input face should not exceed 40 °C. Also, the UV-VIS models should not be exposed to wavelengths shorter than 300 nm, the VIS models to 340 nm, and the VIS-NIR to 420 nm.

Specifications

	DUV Liquid Light Guides	UV-VIS Liquid Light Guides	VIS Liquid Light Guides	VIS-NIR Liquid Light Guides
Transmittance Range	220 to 600 nm	300 to 650 nm	340 to 800 nm	420 to 2000 nm
Numerical Aperture	0.43	0.59	0.59	0.52
F/#	1.2	0.85	0.85	0.96
Acceptance Cone, 2a	50°	72°	72°	62°

TECHNICAL REFERENCE

CALIBRATION SOURCES

DEUTERIUM SOURCES

ARC SOURCES

INCANDESCENT SOURCES

MONOCHROMATOR AND FIBER ILLUMINATORS

SOLAR SIMULATORS

PHOTOLITHOGRAPHY INSTRUMENTS

ACCESSORIES FOR ORIEL LIGHT SOURCES

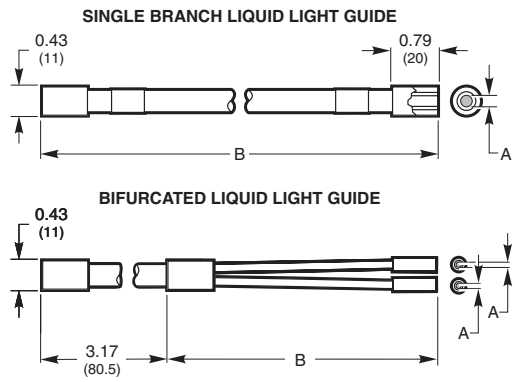


Fig. 4 Dimensional diagram of liquid light guides

Ordering Information

Single Branch Liquid Light Guides

Liquid Light Guide Type	Core Diameter inch (mm)	Total Length Inch (m) (B)	Min. Bend Radius - inch (mm)	Model	
DUV	0.12 (3)	39.4 (1)	1.6 (40)	76840	
	0.12 (3)	79.0 (2)	1.6 (40)	76841	
	0.2 (5)	39.4 (1)	2.4 (60)	76842	
	0.2 (5)	79.0 (2)	2.4 (60)	76843	
UV-VIS	0.12 (3)	39.4 (1)	1.6 (40)	77554	
	0.12 (3)	79.0 (2)	1.6 (40)	77555	
	0.2 (5)	39.4 (1)	2.4 (60)	77556	
	0.2 (5)	79.0 (2)	2.4 (60)	77557	
	0.3 (8)	39.4 (1)	3.9 (100)	77628	
	0.3 (8)	79.0 (2)	3.9 (100)	77629	
	VIS	0.12 (3)	39.4 (1)	1.6 (40)	77566
		0.12 (3)	79.0 (2)	1.6 (40)	77567
0.2 (5)		39.4 (1)	2.4 (60)	77568	
0.2 (5)		79.0 (2)	2.4 (60)	77569	
0.3 (8)		39.4 (1)	3.9 (100)	77631	
0.3 (8)		79.0 (2)	3.9 (100)	77632	
VIS-NIR	0.12 (3)	39.4 (1)	1.6 (40)	77634	
	0.12 (3)	79.0 (2)	1.6 (40)	77635	
	0.2 (5)	39.4 (1)	2.4 (60)	77636	
	0.2 (5)	79.0 (2)	2.4 (60)	77637	
	0.3 (8)	39.4 (1)	3.9 (100)	77638	
	0.3 (8)	79.0 (2)	3.9 (100)	77639	

Bifurcated Liquid Light Guides

Type	Leg Core Diameter - inch (mm) (A)	Leg Length - inch (m) (B)	Common Length - inch (mm)	Model
DUV	0.12 (3)	39.4 (1)	3.17 (80.5)	76844
	0.12 (3)	79.0 (2)	3.17 (80.5)	76845
UV-VIS	0.12 (3)	39.4 (1)	3.17 (80.5)	76846
	0.12 (3)	79.0 (2)	3.17 (80.5)	76847
VIS	0.12 (3)	39.4 (1)	3.17 (80.5)	76848
	0.12 (3)	79.0 (2)	3.17 (80.5)	76849

WEB See our website for more info



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com