



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT


Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

BCU
CLEI: SIUXJKAB_

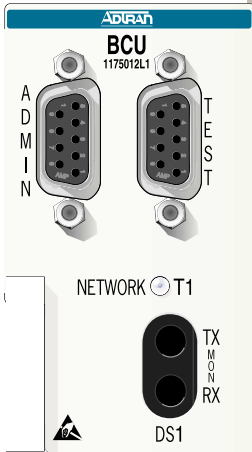

TURN UP STEPS

- 1** Unpack the TA 750 BCU card and inspect for damage. If damage is apparent, refer to your carrier or supplier for remedy.
- 2** Verify SW1 is provisioned properly for your application. Refer to the table in this job aid for default provisioning and other provisioning options.
- 3** Make changes to SW1 options as necessary.
- 4** Insert BCU card into TA 750 chassis slot marked BCU. To insert, hold the BCU card by the faceplate while supporting the bottom edge of the card. Align the card edges with the guide grooves in the TA 750 chassis. Insert into chassis until the edge card connector seats firmly into the chassis backplane. Lock the unit in place by pushing in on the locking lever.
- 5** Monitor Network T1 LED for operational status. After acquiring framing with the far end, The Network T1 LED should be on solid green.

COMPLIANCE CODES

This product is intended to be installed in products providing a Type "B" or "E" enclosure, and in a Restricted Access Location.

CODE	INPUT	OUTPUT
PC	C	C
TC	-	X
IC	A	-

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by ADTRAN could void the user's authority to operate this equipment.

WARRANTY

Warranty for Carrier Networks products manufactured by ADTRAN and supplied under Buyer's order for use in the U.S. is ten (10) years. For a complete copy of ADTRAN's U.S. Carrier Networks Equipment Warranty: (877) 457-5007, Document 414.

NETWORK ALARM LED

- | | | |
|------------|------------------|---------------------------|
| Network T1 | ○ OFF | NO power |
| | ● RED | T1 down or not connected |
| | ● YELLOW | Far end unit in Red Alarm |
| | ● GREEN | Normal operation |
| | * FLASHING GREEN | Network T1 in Test |
| | * FLASHING RED | BCU failed Self Test |


PROVISIONING

ADMIN DB-9

- Provides access for VT 100 terminal screen menu provisioning
- Craft port setting: 9600 Baud, no parity, 8 data bits, 1 stop bit
- When connected, enter the password. The factory default is PASSWORD
- To traverse the menus, select the desired entry and press ENTER. To work backwards in the menu press the ESC key.

DIP Switch S1

- Mounted on the daughter card for T1 provisioning, clocking, and CSU loopbacks
- Note: BCU retains provisioning setup when removed from chassis. If inserted into another chassis, the provisioning set up is invoked on that chassis' access modules.*



TEST INTERFACE

- Provides timing for DS0 test equipment
- Outputs 8 kHz and 64 kHz clock reference signal

BANTAM TEST JACKS

- Provide monitor access to Network T1

DIP Switch S1 Options

Switch	Function	Description		Setting
S1-1	Framing Format	S1-1	S1-3	Setting
		Off	Off	ESF*
		On	Off	SF
		Off	On	TR-08 Digroup A
S1-3	TR-08 Signaling	On	On	TR-08 Digroup B, C, or D
		On...AMI	Off*...B8ZS	
		On...Disabled	Off*...Enabled	
S1-2	Line Code Format	On...AMI	Off*...B8ZS	
S1-4	CSU Loopback	On...Disabled	Off*...Enabled	
S1-5	Timing A	S1-5	S1-6	Function
S1-6	Timing B	Off*	Off*	Loop Timing
		On	Off	External Timing
		Off	On	Local Timing
		On	On	Loop Timing
S1-7	LBO A	S1-7	S1-8	Setting
S1-8	LBO B	Off*	Off*	0 dB/0-133ft(LBO)
		On	Off	-7.5 dB
		Off	On	-15 dB
		On	On	-22.5 dB

*Denotes factory default settings.



■ For a complete I&M Practice: 877.457.5007, Document # 419. Please have your fax number available. ■



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com