ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions


Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Schneider Electric / Gould / AEG AS-P890-000* at our website: *Click HERE*

Modicon P890/P892 Remote I/O Processor Installation Instructions

GI-P890-001 Rev C

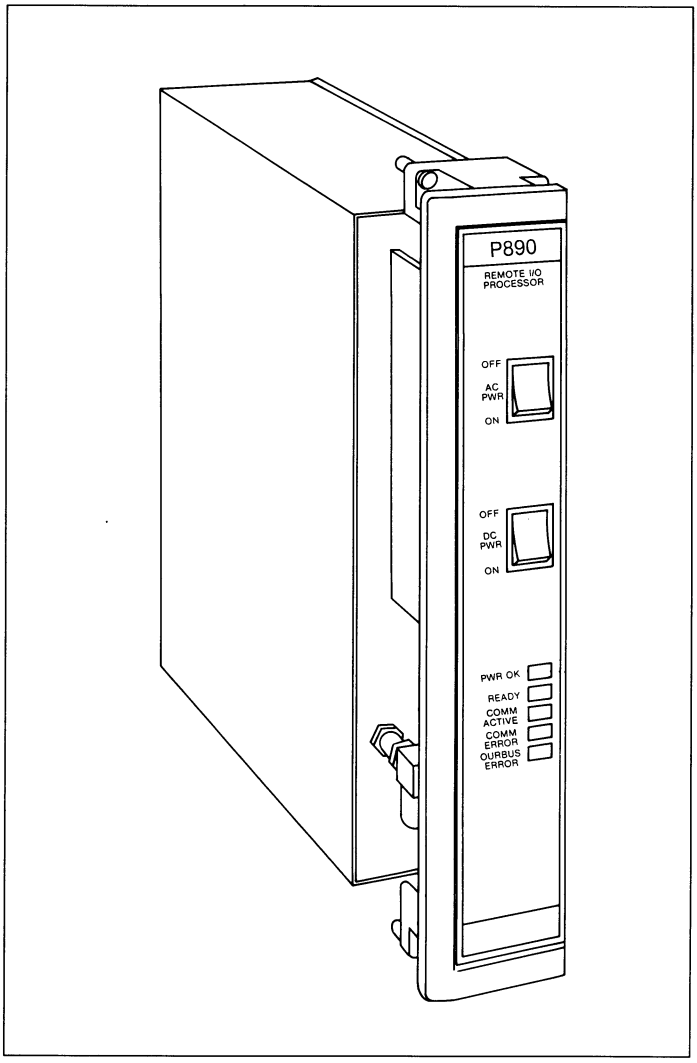

AEG SCHNEIDER AUTOMATION
Modicon • Square D • Telemecanique

MODICON

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

General Description

The MODICON P890/P892 Remote I/O Processors provide a direct interface between 984 PC and 800 Series I/O. Both modules include an integrated power supply that supplies 3 amps of power to adjacent 800 series I/O modules. In addition, the P892 Processor provides two half duplex ASCII ports.

The P890/P892 processor is mounted directly into a primary 19- or 27-inch 800 Series I/O housing (H819/H827-209). The connection between the processor and the I/O modules is made through the housing backplane. The remote I/O system coaxial cabling provides the communications path between the P890/P892 processor and the 984 PC.

The P890/P892 processors are compatible with all 984 family programmable controllers that support the S908 remote I/O system: 984-480, 984-680, 98X, 984A and 984B. The P890/P892 Processors are compatible with all 800 Series I/O modules: discrete, analog, register, and intelligent. The actual number of remote I/O drops and I/O points per drop supported depends on the controller size.


The P890/P892 Processors support a single remote I/O cable configuration. Cable runs from the 984 Controller through taps that have drop cables to the P89X remote interfaces.

The P890/P892 processor power supply supports two separate power sources, 115/230VAC and 24VDC. The AC power source is switch selectable between 115v and 230v settings. The top ON/OFF switch controls the AC power, and the bottom ON/OFF switch controls the 24VDC source. Either source can be used to power the P890/P892. The 24VDC can be used as a backup power source to the 115/230VAC. The single slot P890/P892 can provide a maximum of 3 amps to power 800 series I/O modules. For systems needing more power, expander power supplies should be inserted in the next I/O housing.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 1

Front, Bottom, and Side View

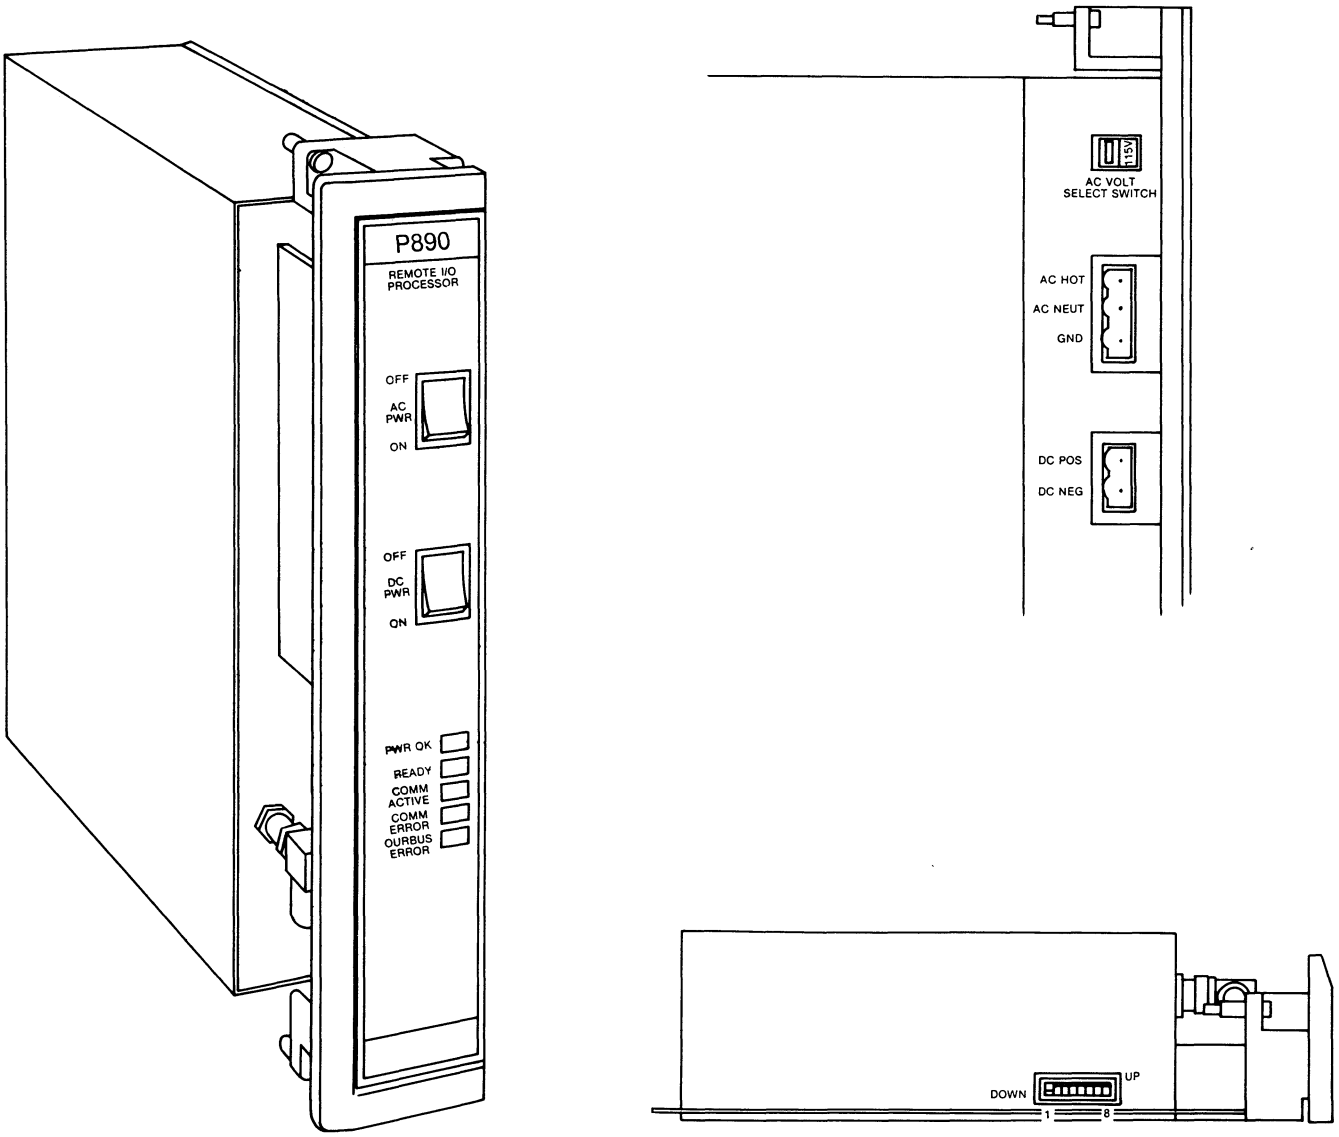

Indicators

Table 1 shows P890/P892 Processor indicator lights, and provides the name, color, and indication when on. The I/O Processor lights are on both processors. The ASCII error indicator is on the P892 Processor only.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Table 1

Indicator Lights

	Name	Color	Indication (When On)
I/O Processor (P890 and P892)	Power OK	Green	All Voltages are OK.
	Ready	Amber	I/O processor board successfully passed power-up tests.
	Comm Active	Green	I/O comm active between P89X and 984.
	Comm Error	Red	A communications error has been detected between the processor and the controller.
	Ourbus Error	Red	A communications error has been detected between the processor and the I/O modules.
ASCII (P892 only)	ASCII Error	Red	An ASCII communications error has been detected at the processor.

Power Available

Power Supplied for I/O Use

+5VIO @ 3Amp max*
+4.3V @ 3Amp max*
−5V @ .25Amp

*The +5VIO and +4.3V combined total load current should not exceed 3 Amps

The P890/P892 Processors provide a fast drop scan rate, less than 5 milliseconds for 256 I/O points. The communication link time to the 984 is less than 1 millisecond with up to five immediate retries.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Figure 2

Typical Configurations

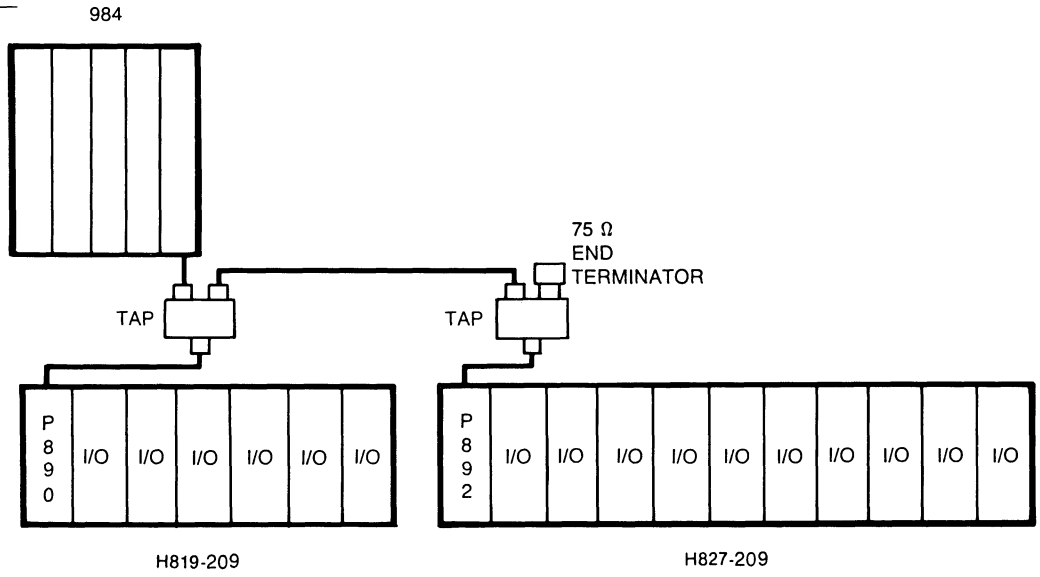


Table 2

P890/P892 Capability Chart

PC	No. of Drops	ASCII Port	Max. I/O Bits/Drop	Max. No. of Racks/Drop	Max. No. of Modules/Drop
984-480	6	10*	512in/512out	5	32
984-680	6	10*	512in/512out	5	32
	31	30*	512in/512out	5	32
984X	6	10*	512in/512out	5	32
984A w/S908	32	32	1024in/1024out	5	32
984B w/S908	32	32	1024in/1024out	5	32

► **NOTE** Drop 1 is local, and thus Ports 1 and 2 are not available (see Table 3).


Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Switch Settings

Before installing the P890 or P892 Processor, you must set the switches located on the bottom of the unit. The P890/P892 Processor has one set of eight switches used to select drop/port address and ASCII communications handshake method.

Figure 3

P890/P892 Drop Address Switch Settings

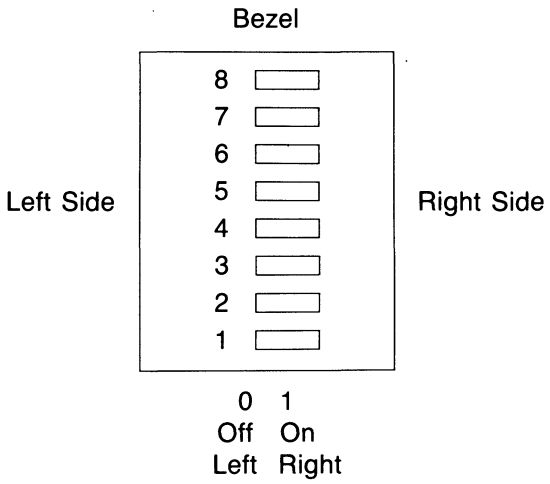

Switches	Functions
For P890 & P892	
1-6	drop/port address 1-32 binary form (see Table 3).
For P890 ONLY	
7-8	not used, set to left
For P892 ONLY	
7	hand shaking for port 1
8	hand shaking for port 2 L = Data Terminal Ready/Data Set Ready R = Xon/Xoff

► **NOTE** You MUST go into the Traffic Cop software and set the ASCII port number to match your switch selection, noting the drop.

► **NOTE** Drop and port addresses are related. Switch settings for Drop #3 correspond to ASCII ports 5 and 6.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Drop Address The drop address is set by the setting switches one through six in the top switchpack as shown in Table 3.

Table 3

Drop Address Switch Settings

Switches						Drop address	For P892 ONLY Port Number
1	2	3	4	5	6		
L	L	L	L	L	L	1	1,2
R	L	L	L	L	L	2	3,4
L	R	L	L	L	L	3	5,6
R	R	L	L	L	L	4	7,8
L	L	R	L	L	L	5	9,10
R	L	R	L	L	L	6	11,12
L	R	R	L	L	L	7	13,14
R	R	R	L	L	L	8	15,16
L	L	L	R	L	L	9	17,18
R	L	L	R	L	L	10	19,20
L	R	L	R	L	L	11	21,22
R	R	L	R	L	L	12	23,24
L	L	R	R	L	L	13	25,26
R	L	R	R	L	L	14	27,28
L	R	R	R	L	L	15	29,30
R	R	R	R	L	L	16	31,32
L	L	L	L	R	L	17	N/A
R	L	L	L	R	L	18	N/A
L	R	L	L	R	L	19	N/A
R	R	L	L	R	L	20	N/A
L	L	R	L	R	L	21	N/A
R	L	R	L	R	L	22	N/A
L	R	R	L	R	L	23	N/A
R	R	R	L	R	L	24	N/A
L	L	L	R	R	L	25	N/A
R	L	L	R	R	L	26	N/A
L	R	L	R	R	L	27	N/A
R	R	L	R	R	L	28	N/A
L	L	R	R	R	L	29	N/A
R	L	R	R	R	L	30	N/A
L	R	R	R	R	L	31	N/A
R	R	R	R	R	L	32	N/A

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

► **NOTE** Drop addresses 1 to 16 can be used as RI/O and ASCII. However, drop addresses 17 to 32 can ONLY be used as RI/O.

► **NOTE** When used with 984X/680/480 drop address starts at 2. Address 1 is the local I/O.

ASCII Ports Correct cable configuration is dependent upon the requirements of the unit attached to the ASCII port, as shown in Table 4.

Table 4


9-Pin ASCII Ports

Pin Number	Designation
1	Chassis Ground (CG)
2	Receive (RXD)
3	Transmit (TXD)
4	Data Terminal Ready (DTR)
5	Signal Ground (SG)
6	Data Set Ready (DSR)
7	Request to Send (RTS)
8	Clear to Send (CTS)
9	No Connection (N.C.)

Sample Pin Layout Table 5 depicts one possible pin layout for a cable connecting a P892 ASCII port and another device using hardwired flow control. Actual pin numbers may vary from device to device.

Table 5

Sample Layout for a 9-Pin ASCII Port

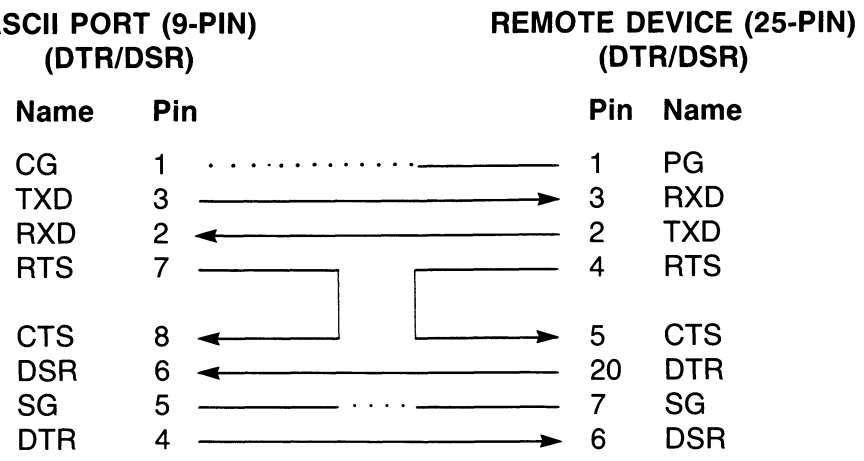

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

The following procedure describes how to install a P890 or P892 Processor. The processor is installed in an H819/H827-209 800 Series I/O Housing in the left-most slot.

► **NOTE** To ensure proper operation of this module, you must have one of the following revisions (or higher) of MODICON Traffic Cop software:

P190	AS-T984-302	Version 2.01	Rev. J
IBM	AS-DIBM-902	Version 3.01	Rev. X

If you do not have a tape or diskette with one of the above software levels, call MODICON Customer Service at 1-800-468-5342 and obtain the proper software.

Procedure How to Install a P890 or P892 Processor

Step 1 Set the address/handshake switch as shown in Figure 3 and Table 3.

Step 2 Ensure that the power supply switches are OFF and power to the housing is OFF. Also, set the 115/230 VAC switch based upon your power requirement. Do not insert the P890 or P892 Processor if power is supplied to the unit.

Step 3 Remove the plastic cover to connect the power cables, once they are in place replace the plastic cover.

Step 4 Wire up the power cable for either AC (three pin plug) or DC (two pin plug) depending upon the application.

Step 5 Connect remote I/O cable to the P890 or P892 F-connector.

Step 6 Remove the ASCII port connector covers. Connect the ASCII device cable(s). For the P892 only.

Step 7 Insert the P890/P892 into the H819/H827-209 housing in the left most slot. Press firmly to ensure that the processor is seated properly in the housing.

Step 8 Tighten the two captive screws located at the top and bottom of the processor.

Step 9 Turn the power supply on. The I/O drop is ready for checkout.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications

Topology	
Cabling	Single coaxial cable 75 ohm RG-6 type
Connector	F-Type
Communications	
Rate	1.544 MHZ
Drop scan time	less than 5 msec for 256 I/O points
Comm link time	less than 1 msec for 256 I/O points
Drop hold up time	Programmable from 300msec to 6553.6sec (in 100 msec increments)
Power Supplied to I/O	+5VIO @3Amp* +4.3V @3Amp* −5V @.25Amp

*The +5VIO and +4.3V combined can not exceed 3 Amps

Power Requirements	115/230VAC ± 15% @ .75Amps, 47-63Hz 24VDC ± 15% @ 2Amps Max.
AC Power Loss Hold up time	1 cycle AC loss
RFI	Meets applicable FCC requirements for industrial equipment
EMI	
Radiated Susceptibility	MS 461B RS03
Conducted Susceptibility	MS 461N CS02
Surge Withstand	IEEE 472-1974, ANSI C37.90a
Static Discharge	15kv to all exterior surfaces, connectors covered or terminated properly, mounted on grounded panel.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Specifications (continued)

Environmental Operating Conditions

Humidity	0 – 95% non-condensing
Temperature	0 – 60°C
Temperature Storage	– 40/ + 80 degrees C
Shock	± 10G's, 11ms. 3 pulses per axis
Vibration	
Sine	5Hz to 50Hz @ .0005 in D.A. 30min/axis 50Hz to 500Hz @ .625G^2 30min/axis
Random	10Hz to 50Hz @ .029G^2/Hz 60Hz to 300Hz @ .29G^2/Hz – 8db/octave
Altitude	10,000 ft max

Physical

Dimensions (W × H × D)	3.53in. × 10.46in. × 8.25in. (8.97cm × 26.59cm × 20.95cm)
Diagnostics	Power-up confidence tests Run time confidence tests

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

World Headquarters:

AEG Schneider Automation International S.A.S.
Steinheimer Strasse 117, D-63500 Seligenstadt, Germany
Tel: (49) 6182 81-2401, Fax: (49) 6182 81-2800

AEG SCHNEIDER AUTOMATION
Modicon • Square D • Telemecanique

North America

● *Sales and Service Network*

● Square D
Executive Plaza
Palatine, IL 60067
Tel: (1) 708-397-2600
Fax: (1) 708-397-8814

■ *R&D/Manufacturing Companies*

■ AEG Schneider Automation, Inc.
One High Street
North Andover, MA 01845
Tel: (1) 508-794-0800
Fax: (1) 508-975-9010

Germany

● AEG Schneider Automation
Steinheimer Strasse 117
D-63500 Seligenstadt
Tel: (49) 6182 81-2584
Fax: (49) 6182 81-2860

■ AEG Schneider Automation GmbH
Steinheimer Strasse 117
D-63500 Seligenstadt
Tel: (49) 6182 81-2584
FAX: (49) 6182 81-2860

France

● Telemecanique
Direction Commerciale France
5 Rue Nadar
F-92566 Rueil Malmaison Cedex
Tel: (33.1) 41 29 82 00
Fax: (33.1) 47 51 73 84

■ AEG Schneider Automation S.A.
245, Route des Lucioles-BP147
F-06903 Sophia-Antipolis Cedex
Tel: (33) 92 96 20 00
Fax: (33) 93 65 37 15

Other Countries

● Schneider
European and International Division
43 Boulevard Franklin Roosevelt
F-92504 Rueil Malmaison
Tel: (33.1) 41 29 80 00
Fax: (33.1) 47 32 99 09

● AEG Schneider Automation
Steinheimer Strasse 117
D63500 Seligenstadt
Tel: (49) 6182 81-2584
Fax: (49) 6182 81-2860

5C 1/97 NP Printed in U.S.A.

GI-P890-001 Rev. C

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisantg.com

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP