



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Presentation

Counting functions are required for counting parts or events, grouping objects, incoming or outgoing flow control, and measuring the lengths or positions of items.

Premium PLCs perform these functions using **TSX CTY 2A/4A** counter modules which have a counting frequency of 40 kHz maximum. In a Premium PLC configuration, the number of TSX CTY counter modules must be added to that of the other application-specific modules (communication, motion control and weighing). (See pages 43517/8 and 43511/5). They are hot-swappable. Counter modules are characterized by their number of channels:

■ 2 channels with downcounting, upcounting and up/down counting for the **TSX CTY 2A** module

■ 4 channels with downcounting, upcounting and up/down counting for the **TSX CTY 4A** module

The parameters of these functions are set by software configuration. The modules take 5 V $\overline{\text{DC}}$ or 10 to 30 V $\overline{\text{DC}}$ sensors with solid state outputs (incremental encoders, proximity sensors, photoelectric detectors) and with mechanical contact outputs (in this case the counting frequency is limited to 100 Hz).

Description

The front panel of **TSX CTY 2A** (2-channel) and **TSX CTY 4A** (4-channel) counter modules comprises:

1 One 15-way SUB-D connector per channel for connecting:

- Counter sensors or incremental encoder
- Sensor power supply
- Encoder power supply feedback for checking that it is supplied correctly

2 One 20-way HE10 connector for 2 channels for connecting the following for each channel:


- Auxiliary inputs: preset, enable
- Reflex outputs
- Power supplies for auxiliary I/O and incremental encoders

3 Rigid casing, which:

- Holds the electronic card
- Locates and locks the module in its slot

4 Module diagnostic LEDs:

- Module diagnostics:
 - Green RUN LED: module operating
 - Red ERR LED: internal fault, module failure
 - Red I/O LED: external fault
- Channel diagnostics: Green CH● LED: channel diagnostics available

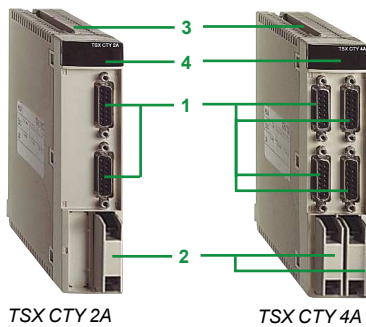


TSX CTY 2A

TSX CTY 4A



Operation block diagram


Block diagram of a channel

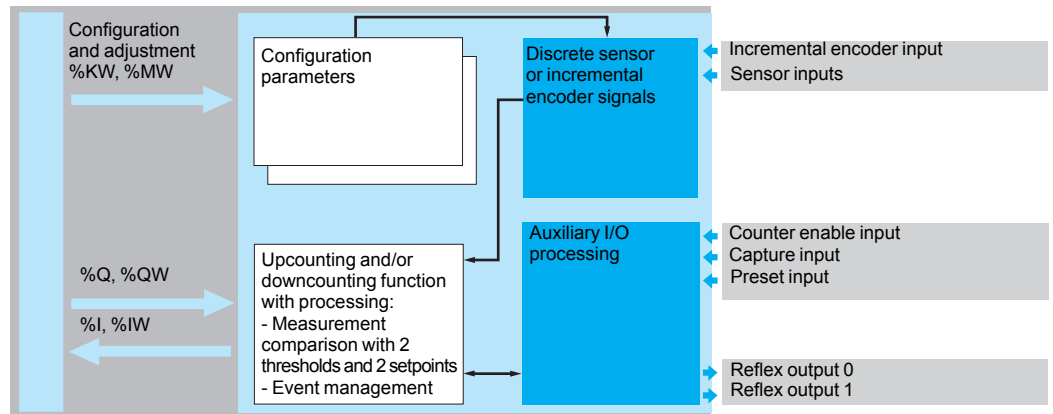

Counter modules are set up using Unity Pro or PL7 Junior/Pro software.

Architectures

Example of an architecture with counter inputs

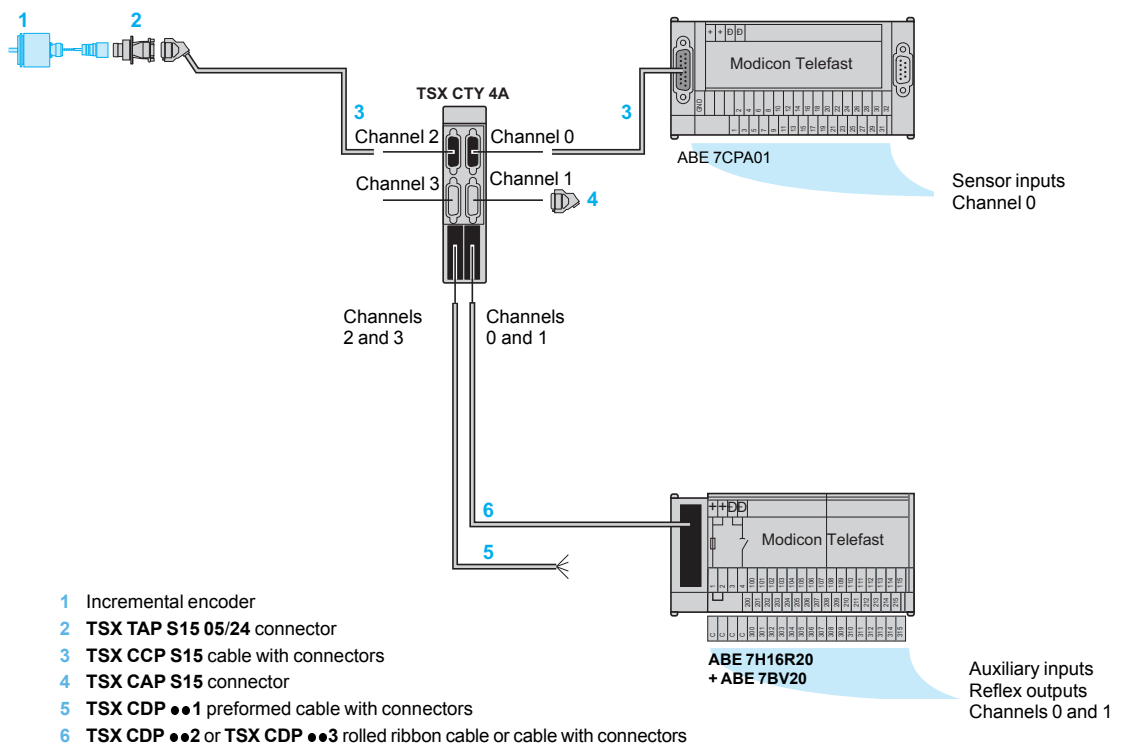

- 1 Incremental encoder
- 2 TSX TAP S15 05/24 connector
- 3 TSX CCP S15 cable with connectors
- 4 TSX CAP S15 connector
- 5 TSX CDP ●●1 preformed cable with connectors
- 6 TSX CDP ●●2 or TSX CDP ●●3 rolled ribbon cable or cable with connectors

Modicon Premium automation platform

TSX CTY 2A/4A counter modules



TSX CTY 2A



TSX CTY 4A

References

Counter modules

Type of input	Characteristics	No. of channels	Reference	Weight kg
24 V $\ddot{}$ 2/3 wire PNP/NPN sensors, 5 V $\ddot{}$ RS 422 or 10...30 V $\ddot{}$ Totem Pole incremental encoders	40 kHz counting Cycle time 5 ms	2	TSX CTY 2A	0.320
	40 kHz counting Cycle time 10 ms	4	TSX CTY 4A	0.430



ABE 7CPA01



ABE 7H16R20




TSX TAP S15

Connection accessories

Description	For connecting	Connector type on TSX CTY ●●	No. (1)	Unit reference	Weight kg
SUB-D connectors Sold in lots of 2	Counter sensors or incremental encoder	15-way SUB-D	4	TSX CAP S15	0.050
Modicon Telefast ABE 7 connection sub-bases	Counter sensors and 24 V $\ddot{}$ power supply	15-way SUB-D	–	ABE 7CPA01	0.300
	Auxiliary inputs, 24 V $\ddot{}$ power supply and 5 V/10...30 V $\ddot{}$ encoder power supply	20-way HE 10 (for 2 channels)	–	ABE 7H16R20	0.300
Additional terminal block Order in multiples of 5	20 linked terminals for ABE 7H16R20 sub-base		–	ABE 7BV20	0.030
Connection interfaces for incremental encoder	5 V $\ddot{}$ RS 422 encoder	15-way SUB-D	2	TSX TAP S15 05	0.260
	10...30 V $\ddot{}$ Totem Pole encoder	15-way SUB-D	2	TSX TAP S15 24	0.260

(1) For numbers, see page 43540/3.




TSX CCP S15 ●●●

TSX CDP ●01



TSX CDP ●02



TSX CDP ●03

References (continued)

Connecting cables

Description	From TSX CTY ●● module	To	No. (1)	Length	Reference	Weight kg
Cordsets AWG 12 (0.205 mm ²)	15-way SUB-D connector	ABE 7CPA01/CPA11 sub-bases or TSX TAP S15● accessory (15-way SUB-D connector)	3	0.5 m	TSX CCP S15 050	0.110
				1 m	TSX CCP S15 100	0.160
				2.5 m	TSX CCP S15	0.300
20-wire preformed cable AWG 22 (0.324 mm ²) 500 mA max.	24 V $\overline{\text{---}}$ power supply and 5 V/10...30 V $\overline{\text{---}}$ encoder power supply auxiliary inputs (moulded 20-way HE 10 connector)	Free end with colour-coded wires	5	3 m	TSX CDP 301	0.400
				5 m	TSX CDP 501	0.660
				10 m	TSX CDP 1001	1.210
Rolled ribbon cable AWG 28 (0.08 mm ²) 100 mA max.	24 V $\overline{\text{---}}$ power supply and 5 V/10...30 V $\overline{\text{---}}$ encoder power supply auxiliary inputs (20-way HE 10 connector)	ABE 7H16R20 sub-base (20-way HE 10 connector)	6	1 m	TSX CDP 102	0.090
				2 m	TSX CDP 202	0.170
				3 m	TSX CDP 302	0.250
Connecting cables AWG 22 (0.324 mm ²) 500 mA max.	24 V $\overline{\text{---}}$ power supply and 5 V/10...30 V $\overline{\text{---}}$ encoder power supply auxiliary inputs (moulded 20-way HE 10 connector)	ABE 7H16R20 sub-base (20-way HE 10 connector)	6	0.5 m	TSX CDP 053	0.085
				1 m	TSX CDP 103	0.150
				2 m	TSX CDP 203	0.280
				3 m	TSX CDP 303	0.410
				5 m	TSX CDP 503	0.670
				10 m	TSX CDP 1003	1.180

(1) For numbers, see page 43540/3.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com