



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗


LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

PMC-16A164

64-Channel, 16-Bit Analog Input PMC Board
With 500 KSPS Input Conversion Rate

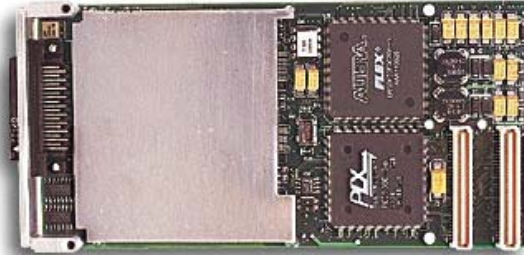

Features Include:

- 64 Single-ended or 32 Differential 16-Bit Scanned Analog Input Channels
- Conversion Rates to 500K Conversions-per-Second in Single-Channel Mode
- Scan Rates to 350K Channels-per-Second in Multichannel Scanning Mode
- Input Ranges Selectable as $\pm 10V$, $\pm 5V$ or $\pm 2.5V$
- Data Buffered through a 64K-sample FIFO
- Continuous and Burst (One-Shot) Input Modes
- Sync Input/Output (Alternate Function for Channels 62,63)
- Scan Sizes from Two to 64 Channels-per-Scan; or Single-Channel sampling of any Channel
- Internal Rate Generator Implements a 32-Bit Divider
- Internal Autocalibration upon command
- DMA Engine Minimizes Host I/O Overhead
- Each Input Channel Buffered for Minimum Crosstalk and Input Bias Current
- Completely Software-Configurable; No Field Jumpers
- Single-width PMC Form Factor with EMI Shield and Panel Bezel

Applications Include:

- | | | |
|----------------------------|-----------------------|------------------------------|
| ✓ Acoustics Analysis | ✓ Voltage Measurement | ✓ Automatic Test Equipment |
| ✓ Analog Inputs | ✓ Process Monitoring | ✓ Audio Waveform Analysis |
| ✓ Data Acquisition Systems | ✓ Industrial Robotics | ✓ Environmental Test Systems |

032505

General Standards Corporation

8302A Whitesburg Drive · Huntsville, AL 35802

Phone: (256) 880-8787 or (800) 653-9970 FAX: (256) 880-8788 Email: Solutions@GeneralStandards.com

ELECTRICAL SPECIFICATIONS

At +25 °C, with specified operating voltages

Input Characteristics:

Configuration:	64 single-ended or 32 differential analog input channels
Voltage Ranges:	Software configurable as ± 10 Volts, ± 5 Volts or ± 2.5 Volts; or optionally factory configured for a fixed range of ± 10 Volts, ± 5 Volts or ± 2.5 Volts
Input Impedance:	1.0 Megohm typical.
Common Mode Rejection:	60 dB typical, DC-60 Hz (Differential inputs)
Common Mode Range:	Same as selected voltage range, with zero normal mode signal (Diff inputs)
Bias Current:	Less than 80 nanoamps
Crosstalk Rejection:	85dB in single-channel mode, 80dB in scanning mode, typical, DC-10kHz
Overvoltage Protection:	± 30 Volts with power applied*; ± 15 Volts with power removed.

* Inputs 62,63 (Alternate function TTL Sync I/O) limited to -0.5 to +7.0 Volts

Transfer Characteristics:

Resolution:	16 Bits (0.0015 percent of FSR)												
Maximum Sample Rate:	Single-Channel Mode: 500K conversions per second Multichannel (Scan) Mode: 350K conversions per second												
Maximum Scan Rate:	Single-Channel Mode: 500K conversions per second Multichannel (Scan) Mode: 350K divided by number of channels in scan												
Channels per scan:	2, 4, 8, 16, 32 or 64 Single-ended channels; 2, 4, 8, 16 or 32 differential channels. Or, any single channel.												
DC Accuracy: (Maximum composite error after autocalibration)	<table><thead><tr><th>Range</th><th>Midscale Accuracy</th><th>\pmFullscale Accuracy</th></tr></thead><tbody><tr><td>$\pm 10V$</td><td>$\pm 3mv$</td><td>$\pm 4mv$</td></tr><tr><td>$\pm 5V$</td><td>$\pm 2mv$</td><td>$\pm 3mv$</td></tr><tr><td>$\pm 2.5V$</td><td>$\pm 1mv$</td><td>$\pm 2mv$</td></tr></tbody></table>	Range	Midscale Accuracy	\pm Fullscale Accuracy	$\pm 10V$	$\pm 3mv$	$\pm 4mv$	$\pm 5V$	$\pm 2mv$	$\pm 3mv$	$\pm 2.5V$	$\pm 1mv$	$\pm 2mv$
Range	Midscale Accuracy	\pm Fullscale Accuracy											
$\pm 10V$	$\pm 3mv$	$\pm 4mv$											
$\pm 5V$	$\pm 2mv$	$\pm 3mv$											
$\pm 2.5V$	$\pm 1mv$	$\pm 2mv$											
Integral Nonlinearity:	± 0.007 percent of FSR, typical												
Differential Nonlinearity:	± 0.003 percent of FSR, maximum												

Analog Input Operating Modes and Controls:

Input Data Buffer:	64K-sample FIFO
Analog Input Modes:	Continuous Scan: Analog inputs are scanned continuously. Burst Scan: Each scan is initiated either by the internal rate generator, or by a hardware TTL input or a software sync input Single Channel: Any single selected channel is sampled continuously Selftest: Autocalibration and Selftest modes

General Standards Corporation

8302A Whitesburg Drive · Huntsville, AL 35802

Phone: (256) 880-8787 or (800) 653-9970 FAX: (256) 880-8788 Email: Solutions@GeneralStandards.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisanTG.com

Analog Input Operating Modes and Controls (Continued):

Rate Generator: Programmable from 0.01 - 500,000 conversions per second. External triggering is available through Channel 62,63 pins.

Input Data Format: Selectable as offset binary or as two's complement

PCI Interface:

Conforms to PCI Specification 2.3, D32, 33MHz, 5V signaling.
Supports "plug-n-play" initialization.
Provides one multifunction interrupt.
Supports DMA transfers as bus master.

MECHANICAL AND ENVIRONMENTAL SPECIFICATIONS

❑ Power Requirements

+5VDC \pm 0.2 VDC at 1.0 Amp, maximum

Maximum Power Dissipation: 4.5 Watts, Side 1
0.8 Watt, Side 2

❑ Physical Characteristics

Height: 13.5 mm (0.53 in)
Depth: 149.0 mm (5.87 in)
Width: 74.0 mm (2.91 in)
Shield: Side 1 can be protected by an optional EMI shield.

❑ Environmental Specifications

Ambient Temperature Range: Operating: 0 to +65 degrees Celsius inlet air
Storage: -40 to +85 degrees Celsius

Relative Humidity: Operating: 0 to 80%, non-condensing
Storage: 0 to 95%, non-condensing

Altitude: Operation to 10,000 ft.

Cooling: Conventional convection cooling; 150 LFPM

ORDERING INFORMATION

Specify the basic product model number followed by an option suffix "-A", as indicated below. For example, model number PMC-16AI64-2 describes a board with 64 input channels.

Optional Parameter	Value	Specify Option As:
Number of Input Channels	32 Channels	A = 1
	64 Channels	A = 2

General Standards Corporation

8302A Whitesburg Drive · Huntsville, AL 35802
Phone: (256) 880-8787 or (800) 653-9970 FAX: (256) 880-8788 Email: Solutions@GeneralStandards.com
Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-tg.com

SYSTEM I/O CONNECTIONS

Table 1. System I/O Connector Pin Functions

ROW-A			ROW-B		
PIN	SIGNAL		PIN	SIGNAL	
	S.E. MODE	DIFF MODE		S.E. MODE	DIFF MODE
1	INP00	INP00 HI	1	INP32	INP16 HI
2	INP01	INP00 LO	2	INP33	INP16 LO
3	INP02	INP01 HI	3	INP34	INP17 HI
4	INP03	INP01 LO	4	INP35	INP17 LO
5	INP04	INP02 HI	5	INP36	INP18 HI
6	INP05	INP02 LO	6	INP37	INP18 LO
7	INP06	INP03 HI	7	INP38	INP19 HI
8	INP07	INP03 LO	8	INP39	INP19 LO
9	INP08	INP04 HI	9	INP40	INP20 HI
10	INP09	INP04 LO	10	INP41	INP20 LO
11	INP10	INP05 HI	11	INP42	INP21 HI
12	INP11	INP05 LO	12	INP43	INP21 LO
13	INP12	INP06 HI	13	INP44	INP22 HI
14	INP13	INP06 LO	14	INP45	INP22 LO
15	INP14	INP07 HI	15	INP46	INP23 HI
16	INP15	INP07 LO	16	INP47	INP23 LO
17	AGND	AGND	17	AGND	AGND
18	AGND	AGND	18	AGND	AGND
19	INP16	INP08 HI	19	INP48	INP24 HI
20	INP17	INP08 LO	20	INP49	INP24 LO
21	INP18	INP09 HI	21	INP50	INP25 HI
22	INP19	INP09 LO	22	INP51	INP25 LO
23	INP20	INP10 HI	23	INP52	INP26 HI
24	INP21	INP10 LO	24	INP53	INP26 LO
25	INP22	INP11 HI	25	INP54	INP27 HI
26	INP23	INP11 LO	26	INP55	INP27 LO
27	INP24	INP12 HI	27	INP56	INP28 HI
28	INP25	INP12 LO	28	INP57	INP28 LO
29	INP26	INP13 HI	29	INP58	INP29 HI
30	INP27	INP13 LO	30	INP59	INP29 LO
31	INP28	INP14 HI	31	INP60	INP30 HI
32	INP29	INP14 LO	32	INP61	INP30 LO
33	INP30	INP15 HI	33	INP62/ SYNC HI *	INP31 HI/ SYNC HI*
34	INP31	INP15 LO	34	INP63/ SYNC LO*	INP31 LO/ SYNC LO*

* Software-selected.

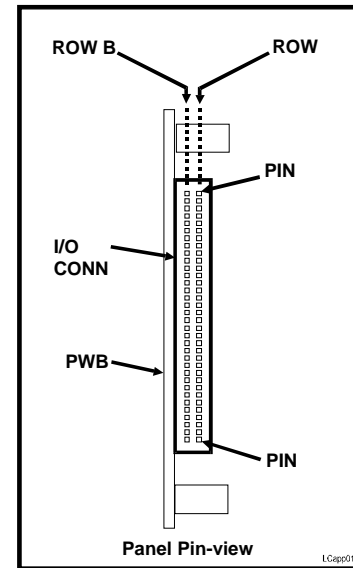


Figure 2. System Input Connector

System Mating Connector:

68-pin 0.050" Subminiature connector:

Robinson Nugent #P50-068-STG or equivalent.

Contact factory for availability of the 68-pin AMP SCSI-3 connector.

General Standards Corporation assumes no responsibility for the use of any circuits in this product. No circuit patent licenses are implied. Information included herein supersedes previously published specifications on this product and is subject to change without notice.

General Standards Corporation

8302A Whitesburg Drive · Huntsville, AL 35802

Phone: (256) 880-8787 or (800) 653-9970 FAX: (256) 880-8788 Email: Solutions@GeneralStandards.com

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-tg.com



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com