

Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

 FAST SHIPPING AND DELIVERY TENS OF THOUSANDS OF **IN-STOCK ITEMS** EQUIPMENT DEMOS HUNDREDS OF SUPPORTED

Experienced engineers and technicians on staff at our full-service, in-house repair center

SERVICE CENTER REPAIRS

Instra View REMOTE INSPECTION

LEASING/MONTHLY

SECURE ASSET SOLUTIONS

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

www.artisantg.com/WeBuyEquipment > LOOKING FOR MORE INFORMATION?

Visit us on the web at **www.artisantg.com** [→] for more information on price quotations, drivers, technical

Sell your excess, underutilized, and idle used equipment


We also offer credit for buy-backs and trade-ins

specifications, manuals, and documentation Contact us: (888) 88-SOURCE | sales@artisantg.com | www.artisantg.com

WE BUY USED EQUIPMENT

VMIVME-4199

ANALOG ISOLATION AMPLIFIER BOARD 16 CHANNELS

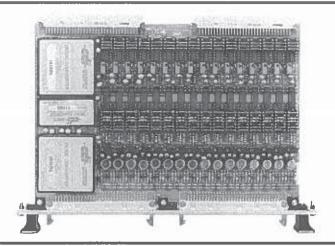

FEATURES

- 16 ISOLATED ANALOG VOLTAGE AMPLIFIER CHANNELS
- HIGH ISOLATION, 500 VDC
- HIGH BARRIER IMPEDANCE, 1,000 MΩ
- DIFFERENTIAL INPUTS
- HIGH OUTPUT CURRENT, 20 mA
- INTERNAL POWER SUPPLIES
- RESISTOR PROGRAMMABLE GAIN, x1 TO x100
- SEPARATE INPUT AND OUTPUT CONNECTORS, 64-pin DIN
- FRONT PANEL ACCESS

APPLICATIONS

- SYSTEM ISOLATION
- GROUND LOOP ELIMINATION
- TRANSDUCER ISOLATION
- DATA ACQUISITION
- POWER MONITORING
- MOTOR/GENERATOR INSTRUMENTATION



VME MICROSYSTEMS INTERNATIONAL CORPORATION 12090 South Memorial Parkway Huntsville, Alabama 35803-3308 (205) 880-0444 FAX No.: (205) 882-0859 1-800-322-3616

Revised 18 March 1991
Specifications subject to change without notice.
Copyright © March 1990 by VMIC
Document No.: 800-004199-000 A

VMIVME-4199

ANALOG ISOLATION AMPLIFIER BOARD 16 CHANNELS

SPECIFICATIONS

FUNCTIONAL CHARACTERISTICS

GENERAL DESCRIPTION:

The VMIVME-4199 is a 16-channel analog isolation amplifier board, designed specifically for use in VMEbus applications. The VMIVME 4199 provides galvanic isolation between analog inputs and outputs. All inputs are differential. The board is self-contained except for electrical power, and is entirely independent of the VME control bus. A functional block diagram of the VMIVME-4199 is shown in Figure 1.

Each channel is individually programmable with a single resistor for voltage gains from x1 to x100. Unused inputs and outputs can be disconnected to further optimize overall isolation characteristics. The inputs are configurable to be either inverting or noninverting.

The VMIVME-4199 Board is an essential component of systems in which ground loops must be eliminated or where potential differences between signal returns are beyond the 20 to 30 V isolation limits of conventional analog boards.

COMPATIBILITY:

Double height 6U, with +5 VDC power on P1 and P2. No VMEbus control functions.

ELECTRICAL SPECIFICATIONS @ 25 °C (1)

NUMBER OF CHANNELS:

Sixteen

CHANNEL VOLTAGE GAIN:

x1.000 ±0.04 percent; channels are individually resistor-programmable

from x1 to x100 (2)

GAIN DRIFT:

±40 ppm/°C

ISOLATION BARRIER:

RESISTANCE; NET, ALL CHANNELS:

 $1,000 M\Omega$

CAPACITANCE; TOTAL, ALL CHANNELS:

250 pfd, input to output 250 pfd, input to VMEbus 500 pfd, output to VMEbus

BREAKDOWN VOLTAGE:

500 VDC

ISOLATION MODE REJECTION:

AC: 108 dB @ 60 Hz

DC: 120 dB

INPUT CHARACTERISTICS (Each Channel)

CONFIGURATION:

Differential, noninverting; field configurable for inverting inputs

VOLTAGE RANGES:

±10 V full scale; resistor-programmable from ±0.1 V to ±10 V full scale (2)

IMPEDANCE (DIFFERENTIAL):

20 MΩ/10 pfd typical 18.5 MΩ/20 pfd (worst case)

(1) Typical values, unless otherwise indicated.

(2) The gain of each channel is resistor-programmable from x1 to x100 with header-mounted gain resistor Rg as: Rg (ohms) = 40,000/(GAIN-1);(Tempco of Rg < 25 ppm/°C).

OFFSET VOLTAGE:

±10 mV (adjustable to zero)

OFFSET VOLTAGE DRIFT:

±200 μV/°C

COMMON MODE VOLTAGE RANGE (CMV):

±10 V, relative to input power return

COMMON MODE REJECTION (CMRR):

72 dB @ 60 Hz

OVERVOLTAGE PROTECTION:

±15 V indefinitely; ±50 V for one second

OUTPUT CHARACTERISTICS (Each Channel)

VOLTAGE RANGE:

±10 V full scale (gain times input voltage)

OUTPUT LOADING:

±20 mA over ±10 V output range, maximum capacitance 0.1 mfd (3)

RIPPLE:

10 mVp-p

DYNAMIC RESPONSE

SETTLING TIME:

200 µs to 0.01 percent

FREQUENCY RESPONSE:

50 kHz, -3 dB; small signal (at unity gain)

SLEW RATE:

2 V/μs

OVERLOAD RECOVERY TIME:

150 μs; 50 percent overload

INTERCHANNEL CROSSTALK:

-72 dB @ 1 kHz

PHYSICAL/ENVIRONMENTAL SPECIFICATIONS

AMBIENT TEMPERATURE:

0 °C to +55 °C, operating -20 °C to +85 °C, storage

RELATIVE HUMIDITY:

10 percent to 80 percent, noncondensing

ALTITUDE:

Operation to 10,000 feet

VMEbus ELECTRICAL INPUT POWER:

+5 VDC @ 6.0 A maximum

RELATED PRODUCTS AND APPLICATIONS

VMIC offers a broad range of Analog Input/Output (AIO) products for VME systems, and supports these products with comprehensive application information. Contact VMIC for a description of current products and a list of Application Guides.

^{(3) 270} mA total load as a sum of all 16 channels.

S4199/F1


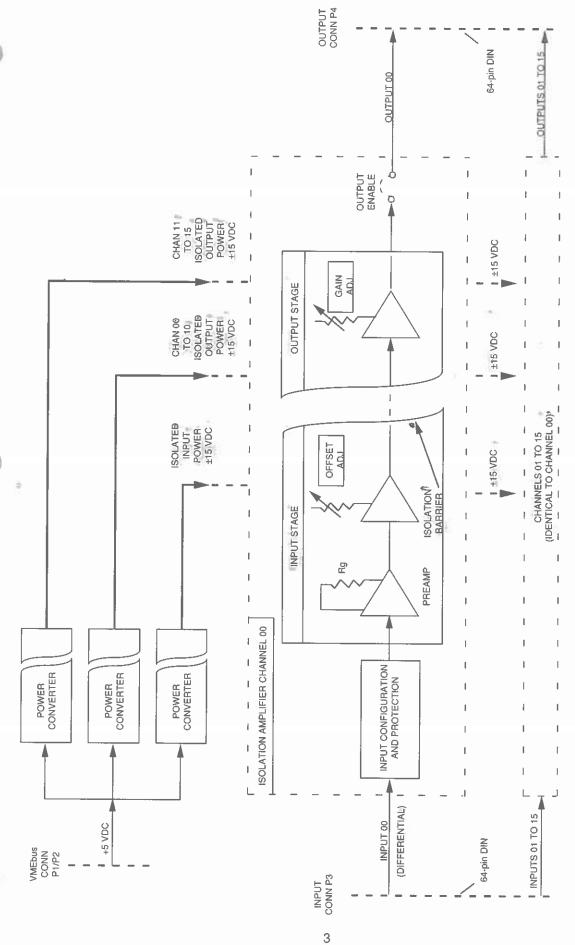


Figure 1. Analog Isolation Amplifier Board Block Diagram

ANALOG ISOLATION AMPLIFIER BOARD 16 CHANNELS

ORDERING INFORMATION

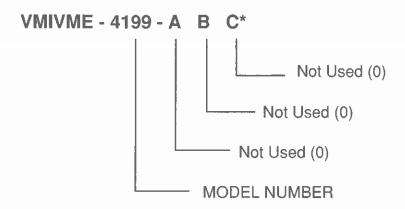

I/O CONNECTOR DATA

TYPICAL CONNECTING	P3, P4
COMPONENT	(PANDUIT)
COMPATIBLE MATING CONNECTOR	120-964-455E
(INSULATION DISPLACEMENT)	(64-pin DIN)
STRAIN RELIEF	100-000-032
P.C. BOARD I/O CONNECTOR	120-964-053A

^{*}The VMIVME-4199 Board has no ordering options, and should be specified with part number VMIVME-4199-000.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

 FAST SHIPPING AND DELIVERY TENS OF THOUSANDS OF **IN-STOCK ITEMS** EQUIPMENT DEMOS HUNDREDS OF SUPPORTED

Experienced engineers and technicians on staff at our full-service, in-house repair center

SERVICE CENTER REPAIRS

Instra View REMOTE INSPECTION

LEASING/MONTHLY

SECURE ASSET SOLUTIONS

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

www.artisantg.com/WeBuyEquipment > LOOKING FOR MORE INFORMATION?

Visit us on the web at **www.artisantg.com** [→] for more information on price quotations, drivers, technical

Sell your excess, underutilized, and idle used equipment

We also offer credit for buy-backs and trade-ins

specifications, manuals, and documentation Contact us: (888) 88-SOURCE | sales@artisantg.com | www.artisantg.com

WE BUY USED EQUIPMENT