



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗


WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

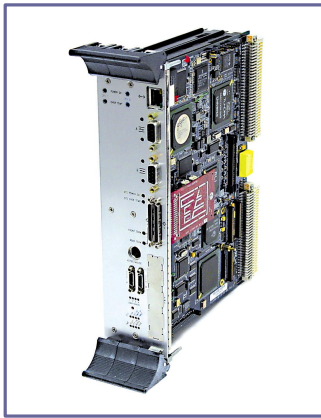

Themis USP III High-Performance Multiprocessing VME Computers



New Dual-Processor UltraSPARC III VMEbus Computers

The new USP III™ is Themis' highest performance family of single-processor and dual-processor 1.28GHz UltraSPARC®-based VME computers available. The new USP III architecture delivers the industry's best data bandwidth, providing next generation I/O performance for government, industrial, military, and commercial VME embedded processing applications.

The USP III is a multi-slot VME board assembly that implements a dual SMP UltraSPARC III architecture. Based on a standard Sun motherboard licensed reference design utilizing Sun's new UltraSPARC III chipset, the USP III is a next generation design suitable for demanding new applications or as an upgraded replacement of earlier USP-2 SMP VME products. The USP III leverages Themis' USPIIe-USB™ product family, and may be configured with either one or two UltraSPARC III CPUs. The single CPU configuration consists of an I/O board and a CPU board assembly occupying two VME slots. An additional processor board is available as an ordering option; it connects to the first CPU board via the UltraSPARC III processor local bus. A dual-CPU configuration occupies three VME slots. Although the I/O board includes a rich complement of I/O functionality, up to two additional 6U VME I/O boards may be configured with the base I/O board. These additional boards can be PMC carriers (two different options) or TGA3D+ graphics boards.


Like its USP-2 predecessor, the USP III provides excellent Sun® graphics support. The Themis TGA3D+™ incorporates Sun XVR-500 graphics technologies and Solaris™ Operating Environment support. Each USP III CPU has a local SMP readable memory module. A dual CPU configuration can have up to 8GB total memory. True SMP is maintained since each UltraSPARC III CPU can access memory from the other CPU via the high-performance J-Bus. To provide CPU connection to I/O devices, two J-Bus bridge chips are used. Data-flow bottlenecks are minimized since each J-Bus device provides two separate and independent PCI buses. One of the J-Bus bridge devices connects to high-speed I/O devices such as Fibre Channel Arbitrated Loop (FC-AL), SCSI disk drive and Gigabit Ethernet. The other J-Bus bridge connects to a 64-bit/66 MHz PCI trunk for the local PMC connection and for PCI expansion to adjacent VME I/O cards (e.g. - optional PMC carrier, PMC/IO carrier and/or TGA3D+ graphics boards). An Ultra160 SCSI interface is used to support the increased bandwidth of today's high-performance LVD SCSI devices; while automatic backward-compatibility modes protect your investment by assuring that earlier single-ended SCSI devices will continue to function properly. Serial ports, SCSI port A, and keyboard/mouse I/O are available at the VME P2 user defined pins via an optional P2 Paddle Board Adapter.

USP III Features & Specifications

- One or two 1.28 GHz UltraSPARC III Processors
- SPECint2k peak (estimate) 605 @ 1.2 GHz
- SPECfp2k peak (estimate) 820 @ 1.2 GHz
- Up to 8GB of DDR266 SDRAM Memory (4-GB per processor)
- L2 Cache – 1MB (on-chip)
- 2 MB Boot Flash and 8 MB User Flash
- VME Interface – VME 64x via Tundra Universe II A24/D16, A32/D32 modes
- VME Form Factor – 6U two (2) slot with one CPU, three (3) slots for two CPUs, expandable to five (5) slots with optional features
- Front panel access and I/O:
 - System and User Front Panel LEDs
 - One 10/100/1000 Mb RJ-45 Ethernet port
 - Four (4) serial ports
 - Two (2) Copper Fibre Channel Interface (FCAL) ports (DB-9 connectors)
 - Two (2) Ultra160 SCSI ports
 - PS/2 or USB keyboard and mouse support (ordering option)
- One (1) PMC Slot (64/32-bit @ 66 MHz)
- PMC expansion – two (2) or three (3) PMC slots
- System Bus – Jbus: 128-bit @ 160MHz
- SNMP Compatible Environmental Monitor (Voltage, Temp)
- VME64x Injector/Ejector Handles (traditional VME ejectors available)
- Temperature Range - Operating: -5 to 40.0°C (at 10,000 feet)
-5 to 50.0°C (at sea level)
Non-Operating: -40 to 85°C
- Humidity (non-condensing) – Operating: 0 to 95%
- Shock - Operating/Non-Operating: 30G @ 40 ms
- Vibration - Operating: 0.90 grms – 10-2000Hz
Non-Operating: 2.97 grms – 10-2000Hz
- Power Requirements: +5V @ 13.4 Amps, +12V @ 13 Amps
- 64-bit Solaris 8 and 9 Operating Environment Support



USPIIIi System Board

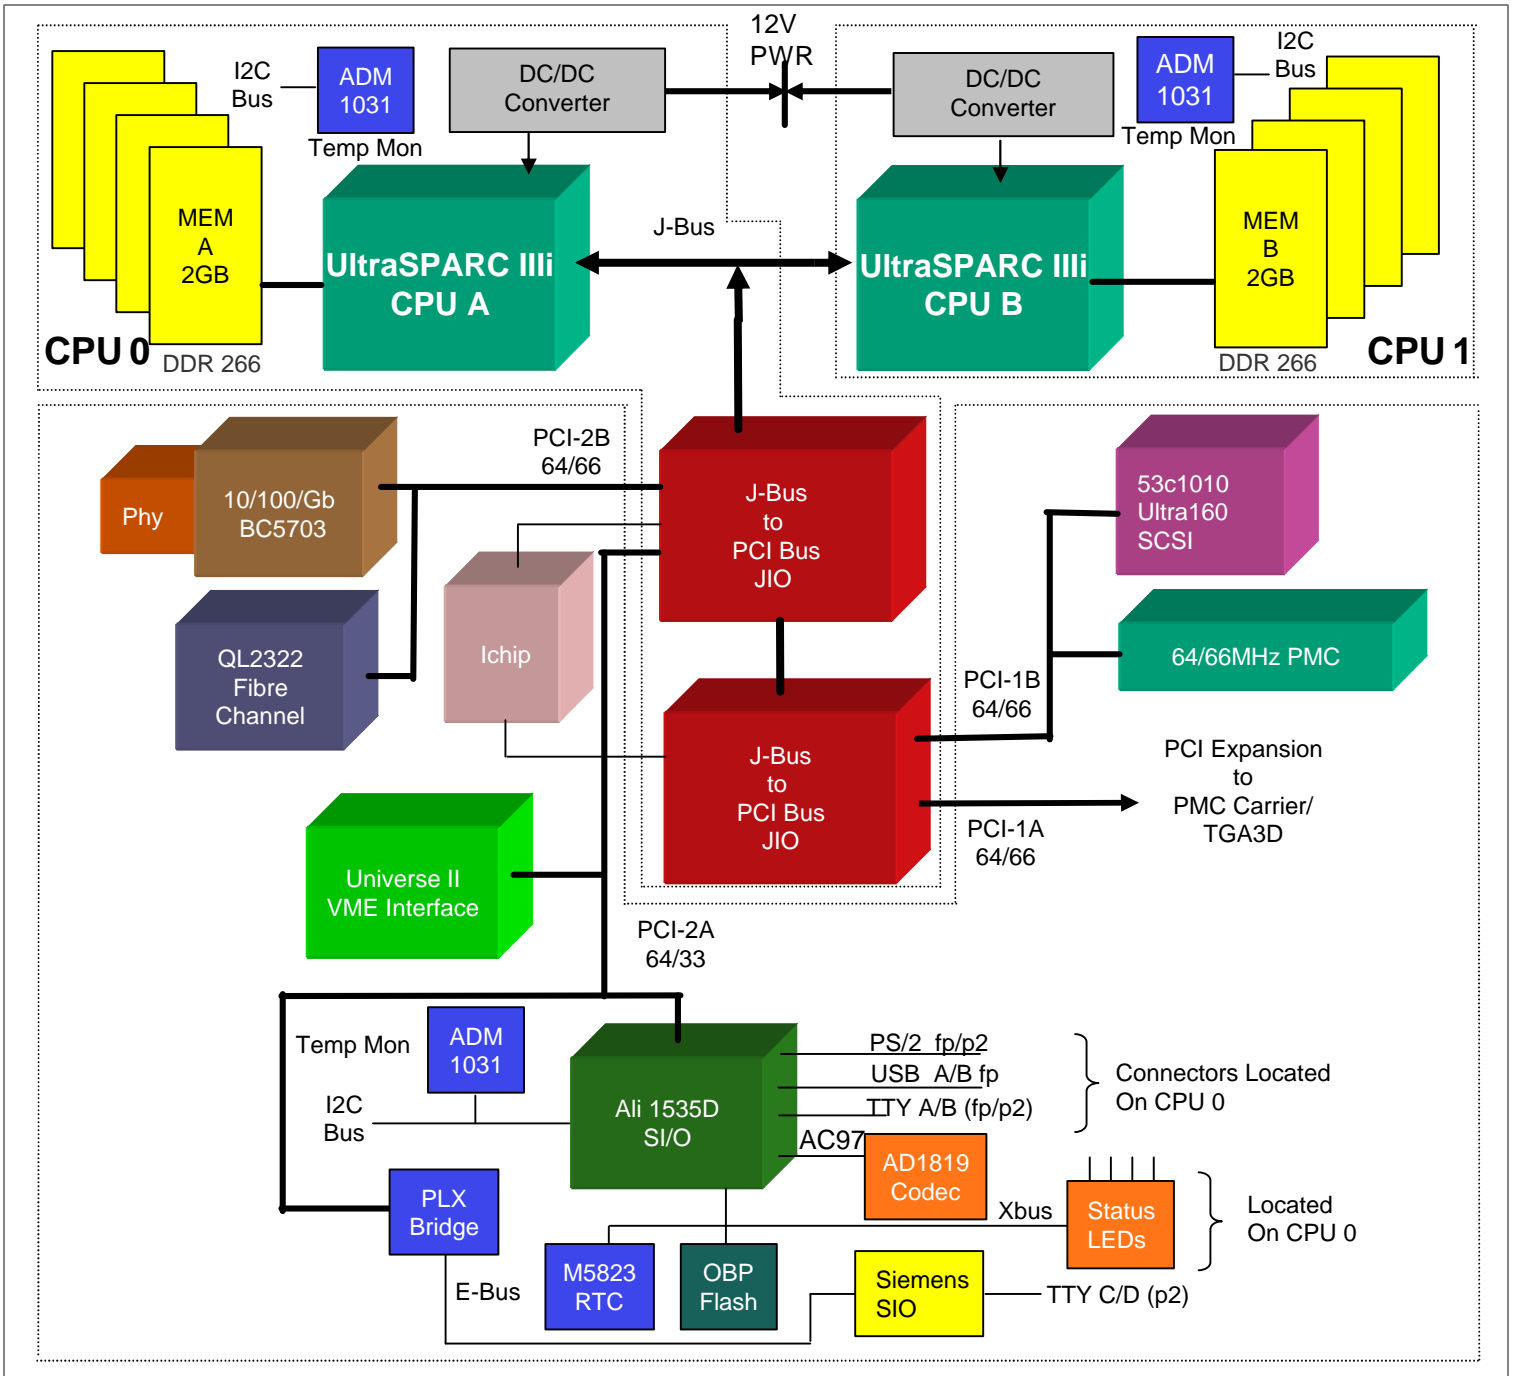

USPIIIi/AAA-BBBB-CCCC-D

AAA = Board Configuration

- /1 = with no carrier cards
- /P2 = with P2 carrier cards
- /P3 = with P3 carrier cards
- /G = with TGA3D+ Graphics Card
- /G2 = with 2 TGA3D+ Graphics Cards
- /GP2 = with TGA3D+ Graphics Card and P2
- /GP3 = with TGA3D+ Graphics Card and P3

CCCC = Frequency

1200 = 1.28 GHz

BBBB = Memory

- 1024 = 1GB SDRAM memory
- 2048 = 2GB SDRAM memory
- 4096 = 4GB SDRAM memory
- 8192 = 8GB SDRAM memory

D = No. Processors

- 1 = Single-processor configuration
- 2 = Dual-processor configuration

THEMIS

Themis
 47200 Bayside Parkway
 Fremont, CA 94538
 Tel: 510-252-0870
 Email: info@themis.com
www.themis.com

Themis Europe Sales Office
 5 rue Irène Joliot-Curie
 38320 Eybens, France
 Tel: +33.476.14.77.86



Themis, the Themis logo, USPIIIi, USPIIe-USB and TGA3D+ are trademarks or registered trademarks of Themis Computer. Sun, Sun Microsystems, and Solaris are trademarks or registered trademarks of Sun Microsystems, Inc. in the United States and other countries. UltraSPARC, the ULTRASPARC DRIVEN logo and SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. in the United States and other countries. Products bearing SPARC trademarks are based upon an architecture developed by Sun Microsystems, Inc.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com