



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?


Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com




Data sheet - AMP-FL8021-CLB-19 - CL band -

1. Front / rear panel configuration

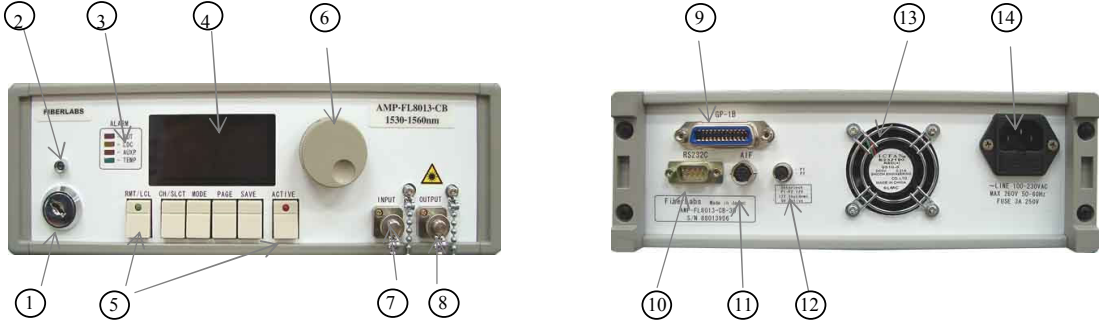

① AC power key switch	⑩ RS232C port
② AC power LED	⑪ Service port
③ Status LED	⑫ Remote interlock port
④ Display	⑬ Fan
⑤ Control buttons	⑭ AC inlet for power supply
⑥ Adjustable dial	
⑦ Input port	
⑧ Output port	
⑨ GP-IB port	

2. Gain/NF/Output power

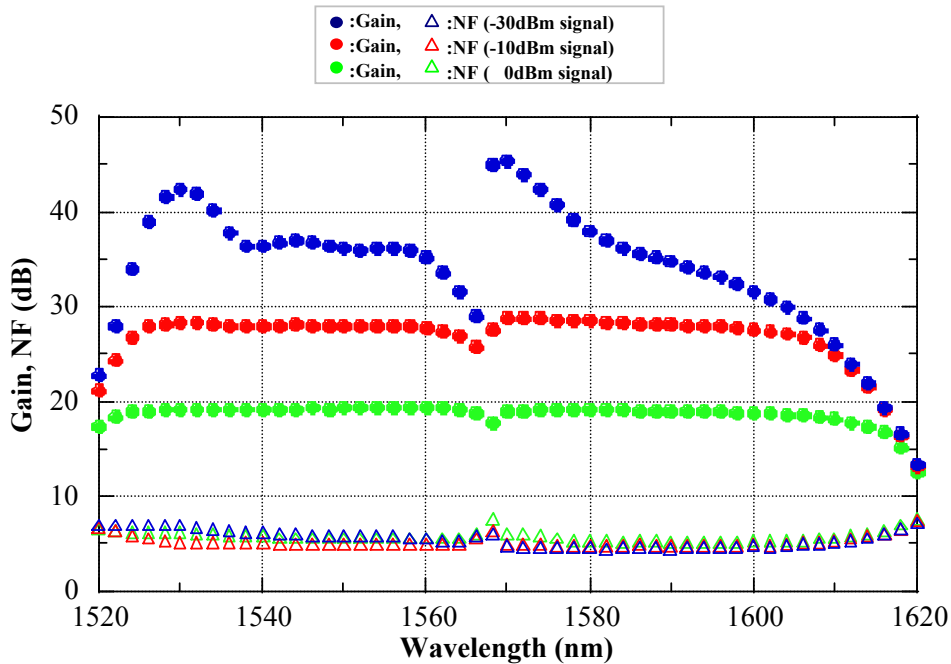

3. Standard Specifications

Item	AMP-FL8021-CLB-19
Signal Wavelength	1530 ~ 1560 nm, 1570 ~ 1610 nm
Maximum Output Power*1	> +19 dBm
Gain *2	> 35 dB
Noise Figure *2	< 7 dB
Input/Output Optical Isolation	> 40 dB
Amplifier control	ACC, ALC
Monitor items	Optical output power, Pumping LD current, Pumping LD temperature, Case temperature
Safety function	Remote shutdown interlock
Remote control Interface	RS232C / IEEE488.1(GP-IB)
Input/Output Fibers	SMF
Optical Connectors	FC/PC
Operation Temperature	0 ~ 40 °C
Storage Temperature	-10 ~ 60 °C
Size (not including protrusions)	88(H) x 260(W) x 350(D) mm
Power consumption	< 30W
Weight	7 Kg
Power Supply	AC100 ~ 240 V (50/60 Hz)
Laser Class	Class 3B

*1 Input Power: > 0 dBm@1550 nm, 1580 nm

*2 Input Power: -30 dBm@1550 nm, 1580 nm

4. Options

Option 012	FC/APC optical connector
Option 013	SC/PC optical connector
Option 014	SC/APC optical connector
Option 091	Loss of input power interlock (input power monitor)
Option 093	Reflection from output port interlock (Reflected power monitor)
Option 121	Rack-mount kit, box change (W260->W430)
Option 122	Rack-mount kit for medium box (W260)

Op. 121



Op. 122



- The specifications are subject to change.
- All functions, characteristics and exterior design can be optimized according to customer requirements.

Copyright(C) FiberLabs Inc. All Rights Reserved



FiberLabs, Inc. <http://www.fiberlabs-inc.com> E-mail: info@fiberlabs.co.jp
2-1-15 Ohara, Fujimino-shi, Saitama, 356-8502 Japan

2015/11 Ver. 5.1



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com