



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com



Intel® NetStructure™ ZT 4901 I/O Mezzanine Expansion Card

Product Overview


This 6U, single-slot mezzanine card is designed to work with the Intel® NetStructure™ ZT 5524 High-performance System Master Processor Board. The ZT 4901 card attaches to the ZT 5524 board and interfaces to the system backplane via a standard CompactPCI* slot. It enhances the capabilities of the ZT 5524 board by providing two PMC sites, a dual optical Fibre Channel interface, and CompactPCI bridging at 33 or 66 MHz. The use of two ZT 4901 cards, along with two ZT 5524 boards, enables redundant host processor operation in the Intel NetStructure ZT 5085 12U Redundant Host Packet Switched Platform.



Product Highlights

- **Form Factor:** 6U x 4HP (1-slot). Pairs with the ZT 5524 High-performance Processor Board to form a two-board complex that occupies two slots.
- **Dual PMC Sites:** Two 64-bit 66 MHz PCI mezzanine card slots for mezzanine expansion modules that conform to the IEEE 1386.1 standard.
- **Dual Fibre Channel:** Dual 2Gb Fibre Channel interface available at the front panel and the J5 rear-panel I/O connector. Small Form Factor Pluggable (SFP) connectors are provided at the front panel to support either optical or copper Storage Area Network (SAN) implementations.


Intel in
Communications

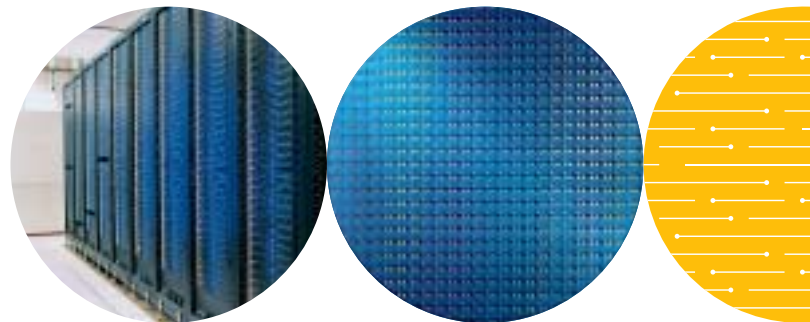

Product Highlights (continued)

- **CompactPCI* Bridging:** The ZT 4901 card, when attached to a ZT 5524 processor board, can operate as a CompactPCI system master. This allows the ZT 5524 host processor board to master a second 33 or 66 MHz CompactPCI bus segment. Or when isolated from the CompactPCI bus it can operate in drone mode when installed in a peripheral slot.
- **Redundant Host Processor:** Two ZT 4901 cards support redundant host processor operation when joined with two ZT 5524 boards in a ZT 5085 platform.
- **IPMI Management:** On-board health monitoring via private I²C BMC interface on the ZT 5524 host board.
- **Compatibility:** Compatible with PICMG* 2.0 R3, 2.16, and 2.9 specifications.

Block Diagram

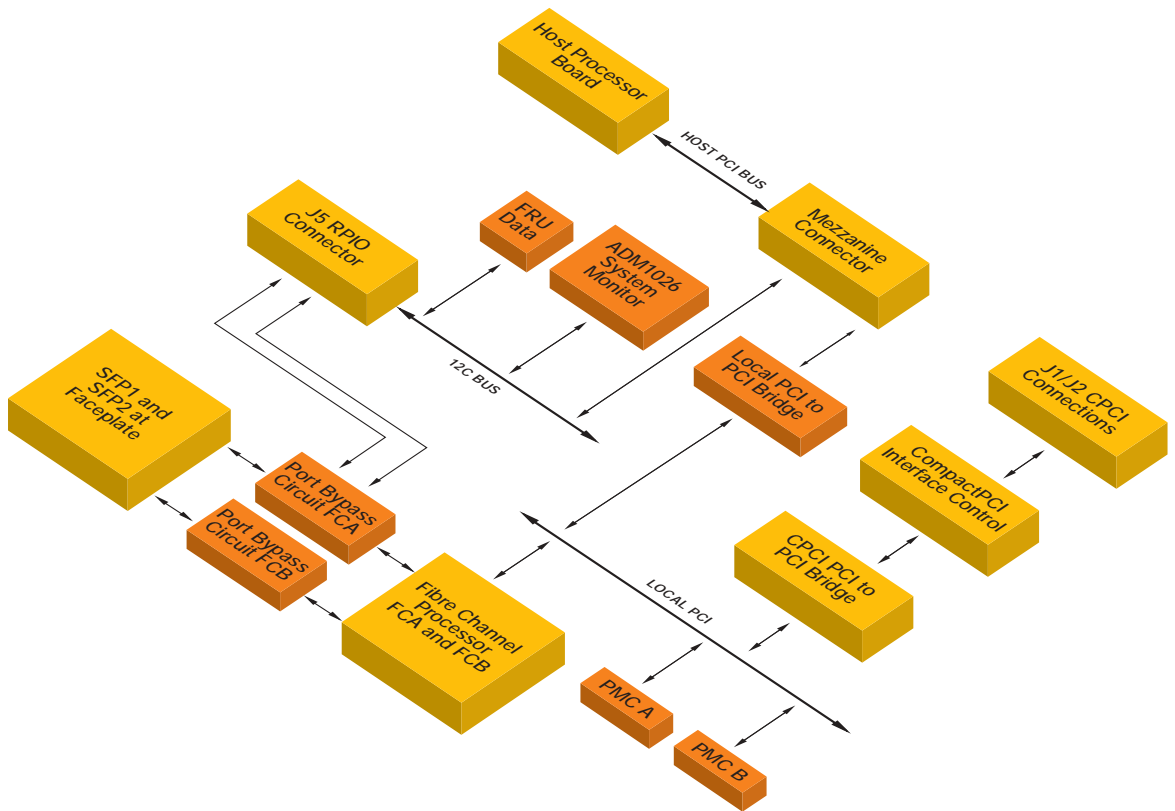

Specifications

The most current product specifications and order options are posted on the Web version of this product brief: developer.intel.com/design/network/products/cbp/linecard.htm

Power Requirements	Minimum	Typical	Maximum
▪ Supply Voltage, Vcc	4.85V	5.00V	5.25V
▪ Supply Voltage, Vcc3	3.20V	3.30V	3.47V
▪ Supply Voltage, +12V (PMC only)	10.8V	12.00V	13.2V
▪ Supply Voltage, -12V (PMC Only)	-13.2V	-12.00V	-10.8V
▪ Supply Current, Icc=5.0V		1.34A	
▪ Supply Current, Icc3=3.3V		1.75A	
▪ Supply Current, +12V	1A maximum (used only by PMC sites)		
▪ Supply Current, -12V	1A maximum (used only by PMC sites)		
Mechanical			
▪ Measures 9.2" x 6.4" (233.35mm x 160mm)			
▪ J1-J5 Connector: IEC-1076-4-101			
▪ J6-J7 Connector: Small Form Factor Pluggable (SFP) sockets for Fibre Channel			
▪ Mezzanine Connector: 192-pin, male (J10)			
▪ Height: .8" plus board-to-board mezzanine connector (one slot; occupies two slots when mated to the ZT 5524)			
▪ Weight: 9.6 oz.			
Environmental			
▪ Operating Temperature: +5 to +55 C with minimum of 200 LFM airflow			
▪ Storage Temperature: -40 to +85 C			
▪ Relative Humidity: < 95% at 40 C, non-condensing			
Regulatory Compliance			
▪ Safety	UL 1950 (USA) C-UL 1950 (Canada) EN/IEC 60950 (Europe) CE Mark		
▪ EMC	FCC 47, Part 15, Subpart B, Class A (USA) EN 55022 EMC Directive / EEC Emissions and Immunity (Europe) EN 61000, Immunity CISPR 22 Information Technology Equipment		
▪ NEBS	The ZT 4901 I/O Mezzanine Expansion Card meets or exceeds the following Network Equipment Building System (NEBS) Level 3 requirements when utilized within a NEBS-compliant system: GR-1089-CORE EMC Section 2 and 3, Electromagnetic Compatibility		

Product Order Codes

Description

ZT 4901A-1A	ZT 4901 I/O Mezzanine Expansion Card with Dual Fibre Channel interface
-------------	--

Intel Access

Developer's Site:	developer.intel.com
Networking and Communications Design Components:	developer.intel.com/design/network
Other Intel Support:	Intel Literature Center developer.intel.com/design/litcenter (800) 548-4725 7 a.m. - 7 p.m. CST (USA and Canada) International locations please contact your local sales office.
General Information Hotline:	(800) 628-8686 or (916) 356-3104 5 a.m. - 5 p.m. PST

For more information, visit the Intel Web site at: developer.intel.com

UNITED STATES AND CANADA
 Intel Corporation
 Robert Noyce Bldg.
 2200 Mission College Blvd.
 P.O. Box 58119
 Santa Clara, CA 95052-8119
 USA

EUROPE
 Intel Corporation (UK) Ltd.
 Pipers Way
 Swindon
 Wiltshire SN3 1RJ
 UK

ASIA-PACIFIC
 Intel Semiconductor Ltd.
 32/F Two Pacific Place
 88 Queensway, Central
 Hong Kong, SAR

JAPAN
 Intel Kabushiki Kaisha
 P.O. Box 115 Tsukuba-gakuen
 5-6 Tokodai, Tsukuba-shi
 Ibaraki-ken 305
 Japan

SOUTH AMERICA
 Intel Semicondutores do Brazil
 Rue Florida, 1703-2 and CJ22
 CEP 04565-001 Sao Paulo-SP
 Brazil



Copyright © 2002 Intel Corporation. All rights reserved. Intel, the Intel logo, and Intel NetStructure are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. Intel products are not intended for use in medical, life saving, or life sustaining applications. Intel may make changes to specifications and product descriptions at any time, without notice.

Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined." Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them.

*Other names and brands may be claimed as the property of others.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com