



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗


LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

APD module C5331 series

Operates an APD with single 5 V supply

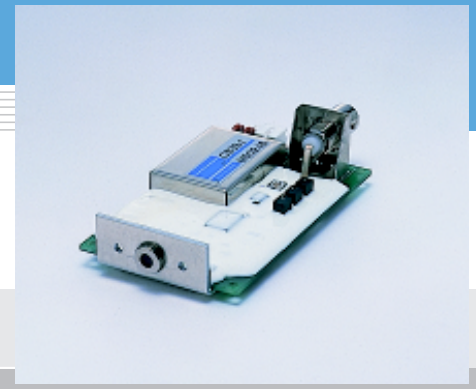

Features

- Choice of high sensitivity APDs
A total of 11 types are available, including 6 types of 800 nm band APDs with active areas from $\phi 0.2$ to $\phi 5$ mm, 3 types of short-wavelength APDs with active areas from $\phi 1$ to $\phi 5$ mm, and FC connector types.
- High sensitivity detection board optimized for APD evaluation
An APD and high-speed current-to-voltage amplifier circuit are mounted on a compact board. The high-speed current-to-voltage amplifier circuit features a low-noise configuration ideal for the APD signal readout and operates at high speeds yet with high sensitivity.
- Easy handling
Single 5 V supply operation
- Built-in temperature-compensated bias voltage circuit
Controls the bias voltage with a thermosensor to keep the APD gain constant. Gain is stabilized to as low as $\pm 2.5\%$ Typ. at ambient temperatures of 25 ± 10 °C. Ripple noise usually inherent to high voltage power supplies is also minimized.
- Compact and lightweight
The circuit board is no larger than business card size, and weighs only 52 g.
- Low price
- Custom devices available with different dimensions and specifications

Applications

- APD evaluation
- Spatial light transmission
- Bar code readers
- Laser radars
- Optical rangefinders
- Optical communications

Selection guide


Type No.	Active area (mm)	Frequency bandwidth -3 dB (Hz)	Type of APD	Peak sensitivity wavelength (nm)
C5331	$\phi 1.5$	4 k to 100 M	Standard type	800
C5331-30 *1				
C5331-01				
C5331-31 *2				
C5331-02				
C5331-03				
C5331-04	$\phi 3.0$	4 k to 80 M	Short-wavelength type	620
C5331-05	$\phi 5.0$	4 k to 50 M		
C5331-11	$\phi 1.0$	4 k to 100 M		
C5331-12	$\phi 3.0$	4 k to 40 M		
C5331-13	$\phi 5.0$	4 k to 20 M		

*1: C5331 + FC connector

*2: C5331-01 + FC connector with lens (compatible with GI 50/125 fiber)

Note: Gain is preset to 30 prior to shipping.

Block diagram

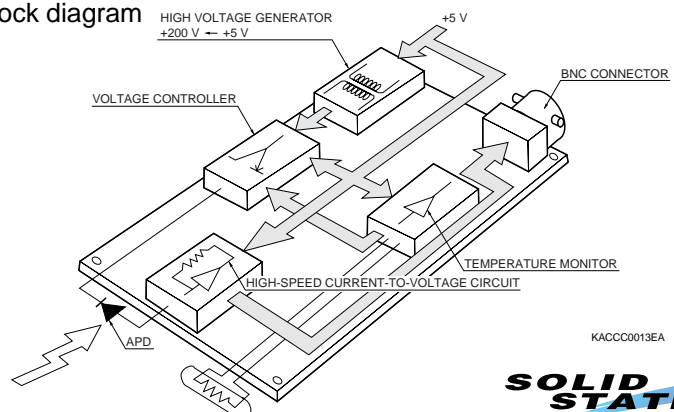

SOLID STATE DIVISION

■ General ratings / Absolute maximum ratings

Type No.	Active area (mm)	Supply voltage			Current consumption		Board dimension (mm)	Output impedance (Ω)	Weight (g)	Absolute maximum ratings			
		Min. (V)	Typ. (V)	Max. (V)	Typ. (mA)	Max. (mA)				Supply voltage (V)	Maximum Incident light level (mW)	Operating temperature Topr (°C)	Storage temperature Tstg (°C)
C5331	φ1.5	+4.75	+5	+5.25	+50	+80	80 × 50 × 23	50	52	+7	10	0 to +60	-20 to +70
C5331-30													
C5331-01	φ0.2												
C5331-31													
C5331-02	φ0.5												
C5331-03	φ1.0												
C5331-04	φ3.0												
C5331-05	φ5.0												
C5331-11	φ1.0												
C5331-12	φ3.0												
C5331-13	φ5.0												

■ Electrical and optical characteristics (Typ. Ta=25 °C, Vcc=5 V, unless otherwise noted)

Photoelectric converter section (APD)


Type No.	Spectral response range λ (nm)	Peak sensitivity wavelength λp (nm)	Photo sensitivity S		Temperature stability of gain *3 25 °C ± 10 °C, Gain=30	
			λ=800 nm, Gain=1 (A/W)	λ=620 nm, Gain=1 (A/W)	Typ. (%)	Max. (%)
C5331	400 to 1000	800	0.5	-	±2.5	±5
C5331-30						
C5331-01						
C5331-31						
C5331-02						
C5331-03						
C5331-04						
C5331-05						
C5331-11	200 to 1000	620	-	0.42	±2.5	±5
C5331-12						
C5331-13						

High-speed amplifier section

Type No.	Cut-off frequency -3 dB				NEP				Feedback resistance (kΩ)	Photoelectric sensitivity *3 including APD, gain=30		
	High band		Low band		λ=800 nm		λ=620 nm			Min. (10 ⁴ V/W)	Typ. (10 ⁴ V/W)	Max. (10 ⁴ V/W)
	Min. (MHz)	Typ. (MHz)	Min. (kHz)	Typ. (kHz)	Typ. (pW/Hz ^{1/2})	Max. (pW/Hz ^{1/2})	Typ. (pW/Hz ^{1/2})	Max. (pW/Hz ^{1/2})				
C5331	90	100	3	4	0.3	0.6	-	-	6.2	-4.3	-4.5	-4.7
C5331-30							-	-				
C5331-01	90	100			0.3	0.6	-	-	10	-7.1	-7.5	-7.9
C5331-31							-	-				
C5331-02	90	100			0.3	0.6	-	-	10	-7.1	-7.5	-7.9
C5331-03	90	100					-	-				
C5331-04	70	80			0.4	0.8	-	-	3.0	-2.1	-2.3	-2.4
C5331-05	40	50			0.7	1.4	-	-	1.1	-0.7	-0.75	-0.79
C5331-11	90	100			-	-	0.5	1.0	3.9	-2.3	-2.46	-2.7
C5331-12	30	40			-	-	1.3	2.6	2.0	-1.1	-1.26	-1.4
C5331-13	10	20			-	-	1.7	3.4	1.1	-0.65	-0.69	-0.75

*3: Gain is preset to 30 prior to shipping.


■ Spectral response

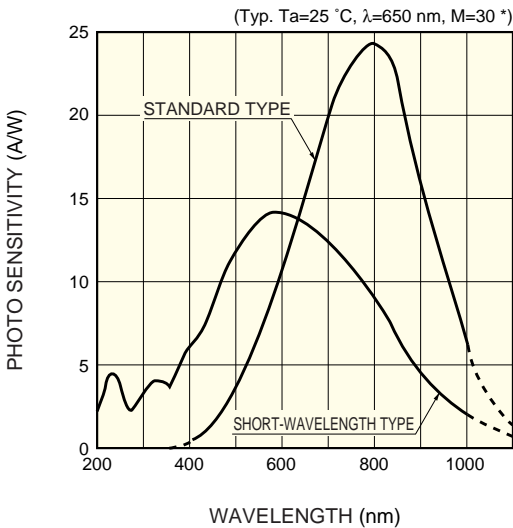

* Measured at a reverse voltage giving a gain of 30. Incident light is 650 nm.


KAPDB0051EA

■ Gain temperature characteristic

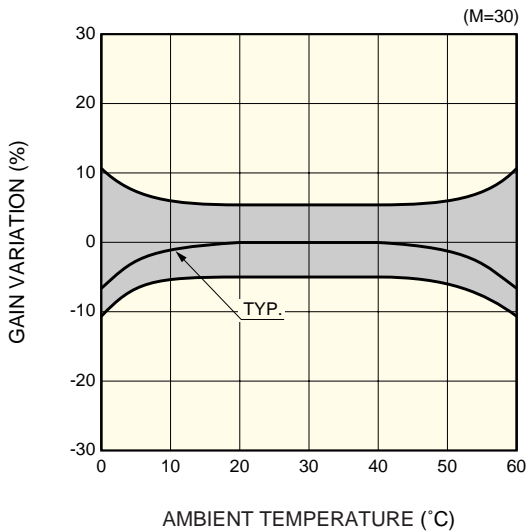


KACCB0020EB

■ Frequency response

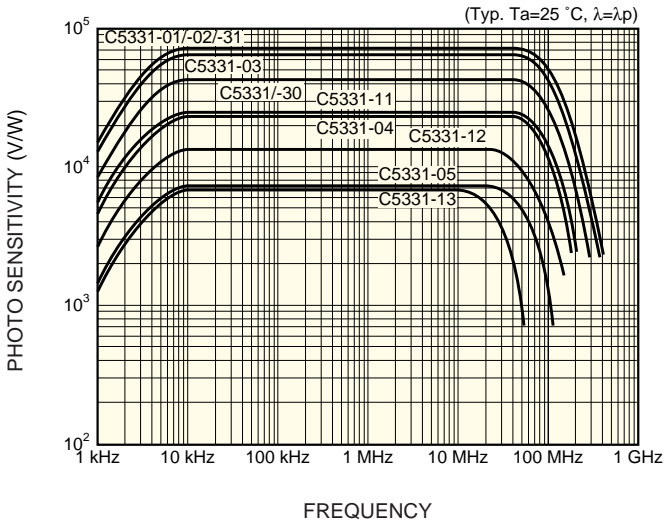

KACCB0021EB


■ Response to stepped light input (C5331-03)

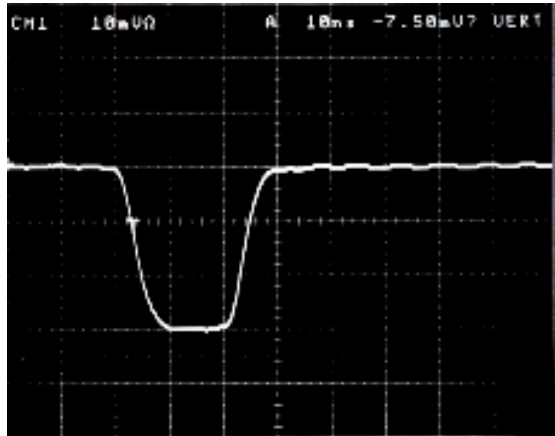

Ta=25 °C, gain M=30, input pulse width=20 µs
X-axis: 10 ns/div., Y-axis: 10 mV/div.

Dimensional outlines (unit: mm)


C5331-01-02-03-04-05-11-12-13

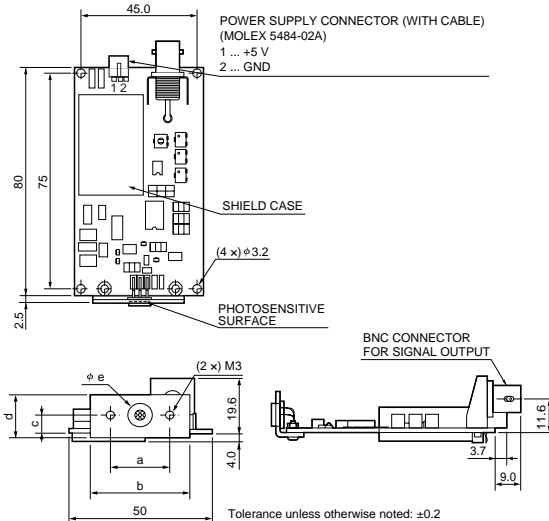

Type No.	a	b	c	d	e
C5331					8.2 \pm 0.1
C5331-01					4.7 \pm 0.1
C5331-02	20	35	6.2	16	4.7 \pm 0.1
C5331-03					4.7 \pm 0.1
C5331-04					8.1 \pm 0.1
C5331-05	25	40	8.6	20	12.35 \pm 0.1
C5331-11	20	35	6.2	16	4.7 \pm 0.1
C5331-12					8.1 \pm 0.1
C5331-13	25	40	8.6	20	12.35 \pm 0.1


KACCA0013EC

C5331-30

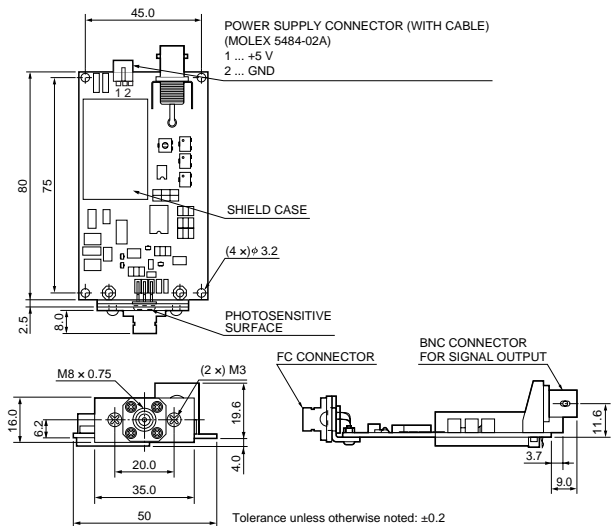

KACCA0093EA

C5331-31

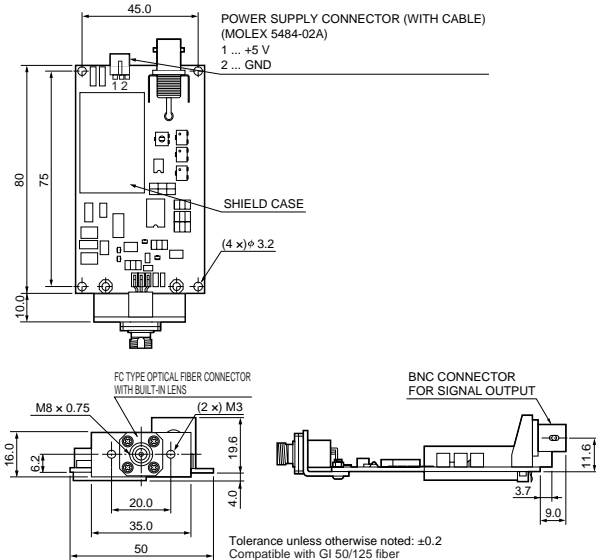

KACCA0094EA

Attachment adapters for FC and SMA connectors

APD module	FC adapter	SMA adapter
C5331-01	A8407-18	A8424-18
C5331-02	A8407-18	A8424-18
C5331-03	A8407-18	A8424-18
C5331-04	A8407-05A	A8424-05A
C5331-05	A8407-08	-
C5331-11	A8407-18	A8424-18
C5331-12	A8407-05A	A8424-05A
C5331-13	A8407-08	-
C5460	A8407-05	A8424-05
C5460-01	A8407-05A	A8424-05A

- (1) A high voltage power supply is used in this product. Do not remove insulating material potted on the board to prevent possible danger.
- (2) Be sure to terminate the output with 50 Ω when using this product.

HAMAMATSU

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2007 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184, www.hamamatsu.com

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Cat. No. KACC1007E05
Sept. 2007 DN

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn

All Datasheets Cannot Be Modified Without Permission

Copyright © Each Manufacturing Company



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com