



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Advantys STB distributed I/O solution

Network interface modules

Applications	Data exchange between master PLC and Advantys STB I/O modules	
Bus or network type	Ethernet TCP/IP network	CANopen bus



Bus or network type	Industrial LAN	CAN fieldbus
Structure	Physical interface	
	Data rate	
Medium		
Configuration	Number of devices (1)	
	Maximum length	
Features of NIM modules (Network Interface Modules)	Number of I/O modules per Advantys STB island (1)	
	Supply voltage	
	Logic power supply	
	CANopen devices supported	
Services used		
Operating temperature (3)	0...60°C (4)	

Type of NIM module	Standard	STB NIP 2212	STB NCO 2212
	Basic (5)		STB NCO 1010

Pages	23
--------------	----

(1) One Advantys STB island corresponds to 1 device on the bus or the network.
 (2) Depending on the nature of the CANopen devices, this maximum number may be limited to 7.
 (3) Horizontal mounting.
 (4) STB N●● 2212 standard modules: -25 to 70°C, see characteristics page 22.
 (5) Does not support the CANopen bus extension module, hot swapping, or Advantys software.

Data exchange between master PLC and Advantys STB I/O modules

Modbus Plus network	Fipio bus	INTERBUS bus	Profibus DP bus	DeviceNet network
---------------------	-----------	--------------	-----------------	-------------------



Industrial LAN compliant with the Modbus Plus standard	Open industrial field bus compliant with the FIP standard	INTERBUS industrial field bus (generation 4)	Industrial field bus (Profibus DP V.0)	Network compliant with v.2.0 of the Open DeviceNet Vendor Assoc. (ODVA)
Modbus Plus standard	FIP standard	Isolated RS 485	RS 485	–
1 Mbps	1 Mbps	500 Kbps	9.6 Kbps...12 Mbps	125, 250 or 500 Kbps
Twisted pair	Shielded twisted pair	Shielded twisted pair	Shielded twisted pair	Twisted pair
32 per segment 64 for all segments	32 per segment 128 max. for all segments	512 slaves max. with 254 bus terminal blocks max.	125 slaves	64 slaves
450 m per segment 1800 m with 3 repeaters	1000 m per segment	400 m per segment of the remote bus 12.8 km for the remote bus 50 m for the installation remote bus	1200 m (9.6 Kbps) 4800 m with 3 repeaters 200 m (12 Mbps) 800 m with 3 repeaters	1200 m
Standard NIM: 32 modules max. on 1 primary segment and 6 extension segments max.		Standard NIM: 32 modules max. on 1 primary segment and 6 extension segments max. Basic NIM: 12 modules max. on 1 primary segment		
24 V $\overline{\text{---}}$ not isolated (19.2...30 V)				
Provides 5 V $\overline{\text{---}}$ logic power to all the I/O modules of an island (1200 mA)				
12 devices max. (2)				
- Global data - Peer-to-peer - Peer Cop	- Periodic I/O exchanges - Point-to-Point message - Use of standard profiles (FRD/FSD/FED)	- Implicit exchange of process data - Logical addressing - Diagnostics	- Slave configuration - Configuration control - Read/write slave I/O data - Diagnostics on Profibus frames	- DeviceNet Object (Class ID3) - Connection Object (Class ID5) - Island Bus Object (Class ID101)
0...60°C (4)				

STB NMP 2212	STB NFP 2212	STB NIB 2212	STB NDP 2212	STB NDN 2212
		STB NIB 1010	STB NDP 1010	STB NDN 1010

Advantys STB distributed I/O solution

Network interface modules

The range of NIM network interface modules comprises 4 basic NIM modules and 7 standard NIM modules.

Each module is dedicated to a specific network or bus:

Network or bus	Basic network interface module	Standard network interface module
Ethernet network	–	STB NIP 2212
CANopen bus	STB NCO 1010	STB NCO 2212
Modbus Plus network	–	STB NMP 2212
Fipio bus	–	STB NFP 2212
INTERBUS bus	STB NIB 1010	STB NIB 2212
Profibus DP bus	STB NDP 1010	STB NDP 2212
DeviceNet network	STB NDN 1010	STB NDN 2212

All STB N●●●●● references include a power supply connector of each type: one screw-type connector and one spring-type connector.

Power supply for network interface modules

Network interface modules are powered by an external 24 V \pm power supply.

They convert this voltage to 5 V \pm to provide logic power to the I/O modules of the main Advantys STB segment.

This built-in 5V logic power supply provides a maximum current of 1.2 A.

(operations in extended temperature ranges: see page 22).


This current can be increased through the addition in each segment of an STB CPS 2111 auxiliary power supply that also provides a maximum current of 1.2 A (operations in extended temperature ranges: see page 26).

The STB CPS 2111 should be associated with an STB PDT ●10● power supply module.


Logic power for the I/O modules in each extension segment is provided by the BOS bus extension module STB XBE 1300 placed at the beginning of these segments (see page 26).

Advantys STB distributed I/O solution

Network interface modules

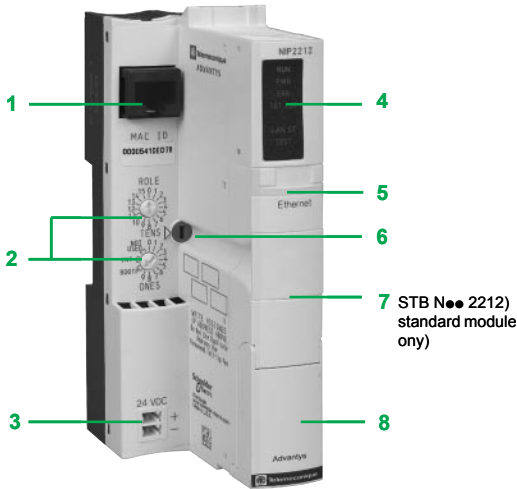

Interface modules with network/bus address selectors

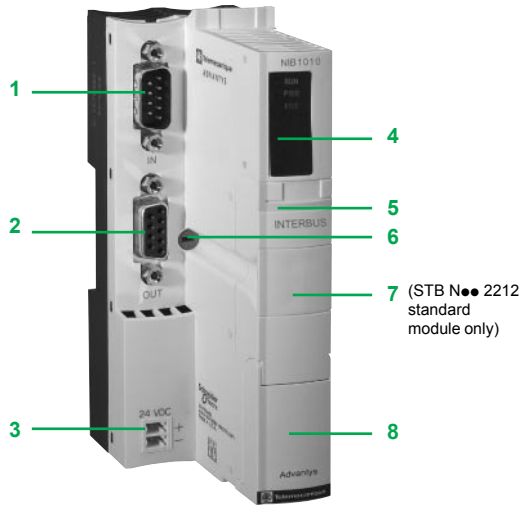

INTERBUS STB NIB 2212/1010 interface modules

Description

Network interface modules STB N●● 2212/1010

The front panel of the STB N●● 2212/1010 network interface modules has the following features:

- 1 A connector to connect the island to the fieldbus. See photos of different connector types on pages 18 and 19 and characteristics on page 23.
- 2 - All NIM modules except INTERBUS network interface modules: Two rotary node addressing selectors on the bus or the network
 - INTERBUS STB NIB 2212/1010 network interface modules: One 9-way female SUB-D connector to connect the outgoing bus cable
- 3 An external 24 V \square power supply connector for the removable screw-type (STB XTS 1120) or spring-type (STB XTS 2120) terminals. External Phaseco power supplies (see page 6)
- 4 An LED display block indicating the different states of the island on the bus: power, communication, send/receive data, errors, etc.

Indication	Basic NIM modules	Standard NIM modules
Island status: auto-configuration, operational, error, etc. (1)	Green RUN LED	Green RUN LED
Power supply: NIM powered up, internal 5 V operational	Green PWR LED	Green PWR LED
Module error (2)	Red ERR LED	Red ERR LED
1 to 3 LED status indicators	Depending on bus/network	Depending on bus/network
Test mode (3)	-	Yellow Test LED

- 5 A colour-coded identification stripe: yellow
- 6 A screw for releasing the STB N●● 2212/1010 module from the DIN rail. The NIM module can be removed from the island even if the product is assembled. Simply remove the PDM and then turn this screw a quarter turn.
- 7 A slot for a removable SIM card STB XMP 4440 (only on STB N●● 2212 standard NIM modules)
- 8 - Standard NIM module: Access flap for the Reset button (4) and the port used to connect an island setup and configuration PC or HMI terminal (read/write data). Can also be used to update the firmware for the network interface module (5).
 - Basic NIM module: Access flap for the Reset button (4) and the port used to connect a PC used only for updating the firmware of the network interface module.

The network interface modules are supplied with:

- An English-language mini-CD-ROM supporting the documentation, a label template and one exchange file per network type
- STB XMP 1100 bus terminator

These are mounted directly on the DIN rail.

The STB SUS 8800 CD-ROM contains specific documentation for each of the 11 network interface modules in 5 languages. These documents can also be downloaded from www.schneider-electric.com.

(1) RUN is on permanently if the module is operational and flashes in various ways in the other states.

If RUN flashes on startup, the NIM module is in the auto-configuration phase.

If RUN flashes for a long time, there is a fault on the island. For information about status indications for the NIM module and the island, refer to the "Network interface module applications guide" for the specific network, included on the STB SUS 8800 CD-ROM or available on our website: www.schneider-electric.com.

(2) ERR is off when the island is OK. Otherwise, ERR flashes or is lit.

(3) Test LED off: island OK. Test LED on: backup of parameters to internal memory or SIM card in progress. Test LED flashing: island in Test mode.

(4) Pressing the Reset button for 4 seconds restores the island to the factory settings or the settings contained on the SIM card.

(5) Firmware update of NIM modules available at www.schneider-electric.com.

Advantys STB distributed I/O solution

Network interface modules

Characteristics		STB	NIP 2212	NCO 2212	NCO 1010	NMP 2212	NFP 2212
Network interface module type		STB	NIP 2212	NCO 2212	NCO 1010	NMP 2212	NFP 2212
Range		Standard	Standard	Basic	Standard	Standard	Standard
Network or bus		Ethernet	CANopen			Modbus Plus	Fipio
Compliance with bus or network standards		IEEE 802.3	CIADS-301			modbus.org	EN 50170, Vol 3, Parts 1-3, 2-3, 3-3, 5-3, 6-3 and 7-3
Supply voltage	V $\overline{\text{---}}$	24 V non-isolated (1)					
Operating temperature, horizontal mounting	°C	-25 to 70 (2)		0 to 60	-25 to 70 (2)		
Input current	mA	700	700	400	700		
Voltage range	V $\overline{\text{---}}$	19.2 to 30 (2)					
Output voltage to the island logic bus	$\overline{\text{---}}$	5.25 V \pm 0.21%					
Nominal output current	A	1.2 (0.575 for STB N●● 2212 standard modules operating in the range 60 to 70°C)					
Isolation		None					
Immunity to electromagnetic interference (EMC)		Yes, according to IEC 61131-2					
Connector type	To bus or network	RJ45 female	9-way male SUB-D		9-way female SUB-D	9-way male SUB-D	
	RS 232 port (configuration, dialogue with XBT and firmware update)	HE 13, 8-way female	HE 13, 8-way female	(3)	HE 13, 8-way female		
Maximum number of addressable I/O modules	Per island	32	32	12	32		
Number of segments supported	Primary	1					
	Extension	6 max.	6 max.	–	6 max.		

STB network interface module type		STB	NIB 2212	NIB 1010	NDP 2212	NDP 1010	NDN 2212	NDN 1010
Range		Standard	Basic	Standard	Basic	Standard	Basic	Standard
Network or bus		INTERBUS		Profibus DP		DeviceNet		
Compliance with bus or network standards		INTERBUS Club		DIN 19245, Parts 1 and 3		Open DeviceNet Vendors Association		
Supply voltage	V $\overline{\text{---}}$	24 V non-isolated (1)						
Operating temperature, horizontal mounting	°C	-25 to 70 (2)	0 to 60	-25 to 70 (2)	0 to 60	-25 to 70 (2)	0 to 60	
Input current	mA	700	400	700	400	700	400	
Voltage range	V $\overline{\text{---}}$	19.2 to 30 (2)						
Output voltage to the island logic bus	$\overline{\text{---}}$	5.25 V \pm 0.21%						
Nominal output current	A	1.2 (0.575 for STB N●● 2212 standard modules operating in the range 60 to 70°C)						
Output impedance	m Ω	< 50 up to 100 kHz	\leq 50	< 50 up to 100 kHz	\leq 50	< 50 up to 100 kHz	\leq 50	
Isolation		None						
Immunity to electromagnetic interference (EMC)		Yes, according to IEC 61131-2						
Connector type	To bus or network	Incoming: 9-way male SUB-D Outgoing: 9-way female SUB-D		9-way female SUB-D		5-way male connector		
	RS 232 port (configuration, dialogue with XBT and firmware update)	HE 13, 8-way female	(3)	HE 13, 8-way female	(3)	HE 13, 8-way female	(3)	
Maximum number of addressable I/O modules	Per island	32	12	32	12	32	12	
Number of segments supported	Primary	1						
	Extension	6 max.	–	6 max.	–	6 max.	–	

- (1) Use a 24 V $\overline{\text{---}}$ SELV (Safety Extra Low Voltage) external power supply.
 (2) STB N●● 2212 standard modules:
 - range -25 to 0° C: the power supply voltage range is $\overline{\text{---}}$ 20.4 to 30 V.
 - range 0 to 60° C: the power supply voltage range is $\overline{\text{---}}$ 19.2 to 30 V.
 - range 60 to 70° C: the power supply voltage range is $\overline{\text{---}}$ 19.2 to 26.5 V.
 (3) Connection for updating firmware only.

Advantys STB distributed I/O solution

Network interface modules



STB NIP 2212

STB NCO 2212/1010



STB NMP 2212

STB NFP 2212



STB NIB 2212/1010

STB NDN 2212/1010

Network interface modules (1)

Network or bus	Range	Supply voltage	Reference	Weight kg
Ethernet network	Standard	24 V $\overline{\text{---}}$	STB NIP 2212	0.130
	Basic	24 V $\overline{\text{---}}$	STB NCO 1010	0.135
CANopen bus	Standard	24 V $\overline{\text{---}}$	STB NCO 2212	0.135
	Basic	24 V $\overline{\text{---}}$	STB NCO 1010	0.135
Modbus Plus network	Standard	24 V $\overline{\text{---}}$	STB NMP 2212	0.145
Fipio bus	Standard	24 V $\overline{\text{---}}$	STB NFP 2212	0.145
INTERBUS bus	Standard	24 V $\overline{\text{---}}$	STB NIB 2212	0.155
	Basic	24 V $\overline{\text{---}}$	STB NIB 1010	0.155
Profibus DP bus	Standard	24 V $\overline{\text{---}}$	STB NDP 2212	0.140
	Basic	24 V $\overline{\text{---}}$	STB NDP 1010	0.140
DeviceNet network	Standard	24 V $\overline{\text{---}}$	STB NDN 2212 (2)	0.140
	Basic	24 V $\overline{\text{---}}$	STB NDN 1010 (2)	0.140

Separate parts

Description	Type	Reference	Weight kg
DeviceNet removable terminals	Screw-type	STB XTS 1111	–
	5-way Spring-type	STB XTS 2111	–

Replacement and optional parts

Description	Type	Sold in lots of	Reference	Weight kg
Removable terminals for 24 V $\overline{\text{---}}$	Screw-type	10	STB XTS 1120	0.003
	Spring-type	10	STB XTS 2120	0.003

Description	Use	Reference	Weight kg
32 KB removable SIM card (3)	Island configuration backup	STB XMP 4440	–
External 24 V $\overline{\text{---}}$ SELV power supply	–	See page 121	–
Configuration software (3)	–	See page 101	–
Magelis XBT terminal connection cable (3)	–	See page 109	–
RS 232C shielded twisted pair	Configuration PC	STB XCA 4002	0.210
8-way HE 13/ 9-way SUB-D (length 2 m) (3) (4)			
USB SUB-D cable	Configuration PC with USB port Requires STB XCA 4002 (4)	SR2 CBL 06	0.185
User documentation	Multilingual on C-ROM (English, French, German, Spanish and Italian)	STB SUS 8800	–
Bus terminator	Also supplied with the NIM network interface module	STB XMP 1100	–

(1) All network interface modules are supplied with:
 - A suitable power supply connector
 - Documentation in English on mini-CD-ROM and bus terminator (STB XMP 1100)
 (2) DeviceNet 5-way removable terminals STB XTS ●111, to be ordered separately
 (3) Standard modules only
 (4) Supplied with STB SPU 1●●● configuration software (see page 101)

Advantys STB distributed I/O solution

Network interface modules



TSX CAN TDM4



490 NTW 000 ●●



AS MBKT 085

Bus and network connection accessories

CANopen bus (1)

Description	Fitted at ends	Length	Reference	Weight kg
IP 20 CANopen tap junction	4 SUB-D ports. Screw terminals for connection of trunk cables. Line termination.		TSX CAN TDM4	0.196
CANopen preformed cordsets One 9-way female SUB-D connector at each end	Standard, C€ marking: low smoke emission. Halogen-free. Flame-retardant (IEC 60332-1)	0.3 m	TSX CAN CADD03	0.091
		1 m	TSX CAN CADD1	0.143
		3 m	TSX CAN CADD3	0.295
		5 m	TSX CAN CADD5	0.440
	Standard, UL certification, C€ marking: Flame-retardant (IEC 60332-2)	0.3 m	TSX CAN CBDD03	0.086
		1 m	TSX CAN CBDD1	0.131
		3 m	TSX CAN CBDD3	0.268
		5 m	TSX CAN CBDD5	0.400

Ethernet network (1)

Description	Fitted at ends	Length	Reference	Weight kg
Straight shielded twisted pair cables for connecting hubs and switches	2 RJ45 connectors to connect to data terminal equipment (DTE)	2 m	490 NTW 000 02 (2)	–
		5 m	490 NTW 000 05 (2)	–
		12 m	490 NTW 000 12 (2)	–
		40 m	490 NTW 000 40 (2)	–
		80 m	490 NTW 000 80 (2)	–

Modbus Plus network

Description	Use	Reference	Weight kg
9-way male SUB-D connector	Connection of the Modbus Plus connector	AS MBKT 085	–
Modbus Plus tap	IP 20 junction box for T-connections	990 NAD 230 00	0.230
	IP 65 junction box for T-connections, supports one RJ45 connector on front panel	990 NAD 230 10	0.650
	IP 20 T-connector with two RJ45 connectors for Modbus Plus cable and one 9-way SUB-D connector for devices connected via T-connection	170 XTS 020 00	0.260

Description	Use From	To	Length	Reference	Weight kg
Modbus Plus drop cables	IP 20 T-connector	IP 20 T-connector	0.25 m	170 MCI 020 10	–
		170 XTS 020 00 T-connector	1 m	170 MCI 020 36	–
		T-connector	3 m	170 MCI 021 20	–
		T-connector	10 m	170 MCI 020 80	–
	STB NMP 2212 network interface module	990 NAD 230 00 tap	2.4 m	990 NAD 211 10	0.530
			6 m	990 NAD 211 30	0.530

(1) For the complete range of CANopen and Ethernet cables and connection accessories, please refer to the "Automation & Control. Machines & installations with industrial communications" catalogue.

(2) Cable compliant with EIA/TIA-568 Category 5 and IEC 1180/EN 50 173 Class D. For UL- and CSA 22.1-certified cables, add letter U to end of reference.

Advantys STB distributed I/O solution

Network interface modules



TSX FP ACC 12



TSX FP ACC 14



TSX FP ACC 4

Bus and network connection accessories (continued)

Fipio bus				
Description	Use	Characteristics	Reference	Weight kg
Female connectors (9-way SUB-D)	On STB NFP 2212 network interface module	Black polycarbonate IP 20	TSX FP ACC 12	0.040
		Zamak (1)	TSX FP ACC 2	0.080
Bus connection unit	Trunk cable tap link	Black polycarbonate IP 20	TSX FP ACC 14	0.120
		Zamak IP 65 (1)	TSX FP ACC 4	0.660

Description	Use	Length	Reference	Weight kg
Drop cables	8 mm, 2 shielded twisted pairs 150 W For standard environments	100 m	TSX FP CC 100	5.680
		200 m	TSX FP CC 200	10.920
		500 m	TSX FP CC 500	30.000
Daisy chain cables	8 mm, 2 shielded twisted pairs 150 W For standard environments	100 m	TSX FP CA 100	5.680
		200 m	TSX FP CA 200	10.920
		500 m	TSX FP CA 500	30.000

INTERBUS bus

Description	Use	Length	Reference	Weight kg
Installation remote bus cables	Preassembled cables to connect 2 network interface modules	0.110 m	170 MCI 007 00	–
		1 m	170 MCI 100 00	–
Branch interface	Remote bus to installation remote bus branch connection	–	170 BNO 671 00	–
Remote bus cables	–	100 m	TSX IBS CA 100	–
		400 m	TSX IBS CA 400	–

Profibus DP bus

Description	Use	Length	Reference	Weight kg
Connectors for STB NDP 2212 network interface module	Line terminator	–	490 NAD 911 03	–
		–	490 NAD 911 04	–
		–	490 NAD 911 05	–
Profibus DP connection cables	–	100 m	TSX PBS CA 100	–
		400 m	TSX PBS CA 400	–

DeviceNet network

Description	Use	Type	Reference	Weight kg
Female connectors (5-way)	For STB NDN 2212 network interface module	Screw-type	STB XTS 1111	–
		Spring-type	STB XTS 2111	–

(1) Do not use for applications involving vibrations ≥ 1 g or heavy impacts.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com