



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

## 4600 Series Industrial PCs with Integrated 12.1" or 15.0" LCD Displays

DS-46000(D)



- ### FEATURES
- 12.1" SVGA or 15.0" XGA TFT color flat panels
  - Reprogrammable keypad with integrated mouse, touchscreen only, or both
  - Intel® Celeron® M 1.3 GHz, 512 cache, 400 MHz system bus (optional Pentium® M 2.0 GHz, 2M cache, 533 MHz system bus)
  - Up to 2 GB DRAM (512 MB standard)
  - 80 GB minimum Serial ATA hard drive (optional dual hard drives)
  - 4X AGP graphics with 32 MB video memory (shared with system memory)
  - Four available expansion slots:
    - ♦ One (8.0" max.) PCI expansion slot;
    - ♦ Two (9.0" max.) PCI expansion slots;
    - ♦ One (9.0" max.) PCI or ISA expansion slot
  - 10/100, and 10/100/1000 BaseT Ethernet
  - 4 USB 2.0 compliant ports (one additional 1.1 compatible port on front of KPM units)
  - Three Serial Ports:
    - ♦ 2 RS-232;
    - ♦ 1 Selectable RS-232/422/485
  - Rear accessible Type I/II CompactFlash™ socket
  - DVD-R/W, and floppy drives
  - NEMA 4/4x/12 front panel
  - UL, cUL, CE approvals
  - UL listed for hazardous locations: Class I Division 2, Groups A, B, C, D; Class II Division 2, Groups F and G
  - Windows® XP and 2000 operating system
  - 100-240 VAC power supply
  - 2-year warranty included

Pro-face's newest generation of industrial PCs are designed and tested for the tough environments required for plant floor use. Our standard PC configurations meet the strict specifications required for use in hazardous locations and Europe's CE mark. Based on CPU boards designed specifically for industrial automation, these systems provide the capabilities required by demanding applications. With an installed base of over 300,000 systems, our industrial PC products are successfully applied in manufacturing and process environments world-wide.

### Higher Performance, Lower Power

The 4600 series utilizes an Intel mobile processor providing superior processing power while utilizing half the wattage of a comparable Pentium 4 processor. The optional Pentium M 2.0 GHz processor (2 M Cache & 533 MHz system bus) outperforms a desktop Pentium 4, 2.4 GHz (512 K Cache & 533 MHz bus) while utilizing less than half the wattage. With less wattage input the ambient operating temperature is more easily maintained, possibly without the need for expensive enclosure cooling devices. This makes the 4600 series ideal for applications which require a NEMA sealed enclosure.

### Easy-to-Read Display

The 4600 series units utilize bright TFT LCD displays. The 4612 units incorporate a 12.1" SVGA (800 x 600) resolution while the 4615 units incorporate a 15.0" XGA (1024 x 768) resolution. In addition the 4600 units automatically share up to 32 MB system RAM to allow full 32-bit color depth and fast 3D rendering.

### Fits Your Needs

The 4600 series can be configured many different ways. With four available expansion slots many cost effective, industry standard options are easily integrated. The optional dual hard drive, externally accessible


CompactFlash, or RAID-enabled configuration provides the storage solution you require. Additionally the DVD-R/W provides even more storage and backup options.

### Meets High Standards

To survive on the plant floor the 4600 series meets FCC, UL, cUL, and European CE mark requirements for industrial automation equipment. Pro-face/Xycom Industrial PCs lead the industry in reliability, service, and support with an optional five year warranty available.

## SERVICEABILITY

The 4600 series CPU section easily removes from the front panel and display unit without having to detach the front panel from the NEMA enclosure. The rear CPU section can be replaced with another very quickly. With the cover removed, expansion cards are easily installed without cumbersome cables to contend with.

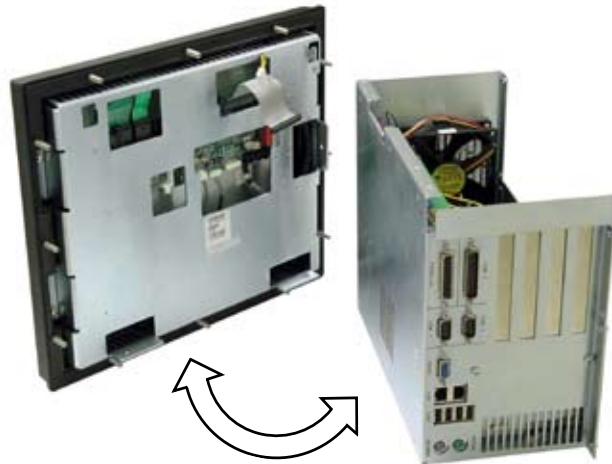

## EASILY REPLACEABLE HARD DRIVE



The 4612 & 4615 units have incorporated a simple to access hard drive mount. Simply loosen 2 captive screws and extract the hard drive. No cables to install or connect; simply plug in the new drive. Optional dual hard drives or RAID-enabled configurations are also available.

## STORAGE OPTIONS


The 4600 series offers several data storage options. The standard unit contains a single Serial ATA hard drive. Dual drives are optional, as well as a RAID-Enabled configuration. Also, the externally accessible Type I/II CompactFlash can be used to further enhance your storage capabilities. The CompactFlash can be ordered with the operating system pre-loaded for a solid state alternative. The 4600 series offers a DVD-R/W, or a floppy for your choice of removable media drives. In addition, the 4 USB 2.0 ports (one additional 1.1 compliant port on front of KPM units) can be utilized to add many commercially available external devices.



Externally Accessible CompactFlash™

## PRODUCT DIMENSIONS AND CONFIGURATIONS


### 4612T

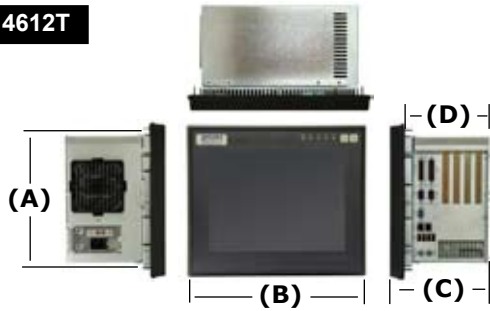

### 4612 Unit Dimensions

Model	4612T	4612KPM(T)
Height (A)	11.00" (279.4 mm)	12.45" (316.2 mm)
Width (B)	13.00" (330.2 mm)	16.70" (424.2 mm)
Depth (C)	7.4" (187.0 mm)	7.4" (187.0 mm)
Mounting Depth (D)	6.32" (160.5 mm)	6.36" (161.5 mm)
Weight	22 lbs (10 kg)	24 lbs (10.9 kg)


### 4612KPM(T)

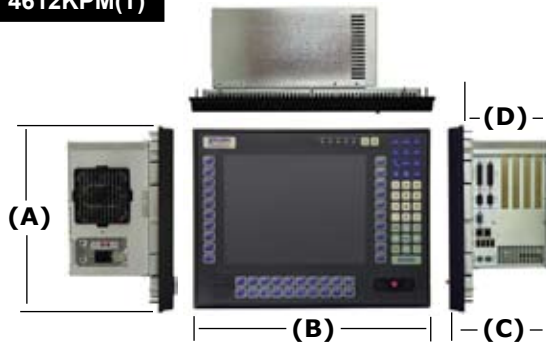

### 4612 Configurations

Display	12.1" LCD color display, 800 x 600 (SVGA), 300 nits
Operator Input	Analog resistive touchscreen ( <b>4612T</b> ) Reprogrammable 74-position keypad and industrial mouse (Touchscreen optional) ( <b>4612KPM(T)</b> )
Processors	Intel® Celeron® M 1.3 GHz or optional Pentium M
Preloaded OS	Windows® XP or Windows® 2000 (multi-language)
Expansion	One (8.0" max.) PCI, two (9.0" max.) PCI, and one (9.0" max.) PCI or ISA


### 4615T

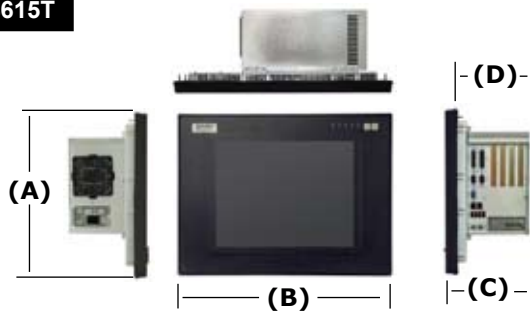

### 4615 Unit Dimensions

Model	4615T	4615KPM(T)
Height (A)	12.62" (320.5 mm)	13.97" (354.8 mm)
Width (B)	16.59" (421.4 mm)	19.00" (482.6 mm)
Depth (C)	7.59" (192.8 mm)	7.64" (194.0 mm)
Mounting Depth (D)	6.59" (167.4 mm)	6.60" (167.6 mm)
Weight	25 lbs (11.34 kg)	27 lbs (12.4 kg)

### 4615KPM(T)

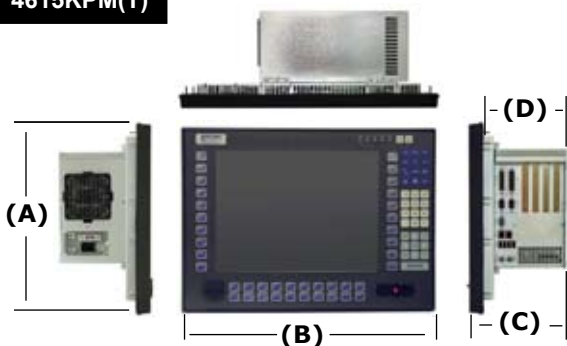


### 4615 Unit Configuration


Display	15.0" LCD color display, 1024 x 768 (XGA), 300 nits
Operator Input	Analog resistive touchscreen ( <b>4615T</b> ) Reprogrammable 74-position keypad and industrial mouse ( <b>4615KPM(T)</b> )
Processors	Intel® Celeron® M 1.3 GHz or optional Pentium M
Preloaded OS	Windows® XP or Windows® 2000 (multi-language)
Expansion	One (8.0" max.) PCI, two (9.0" max.) PCI, and one (9.0" max.) PCI or ISA

# PRODUCT MOUNTING


**4612T Cutout**

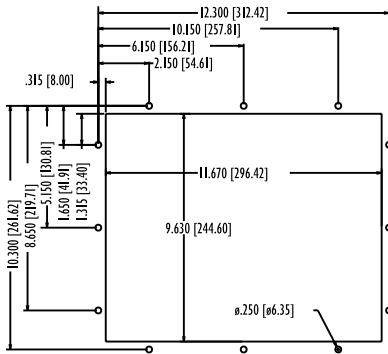


**4612KPM(T) Cutout**

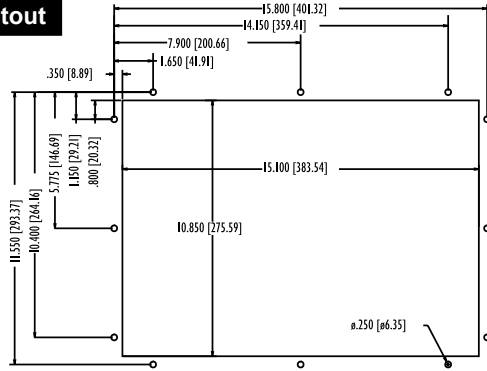

**4615T Cutout**

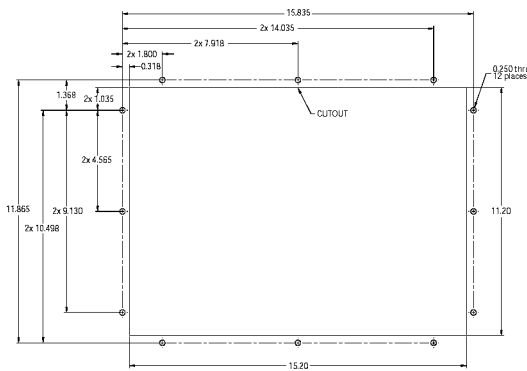

**4615KPM(T) Cutout**

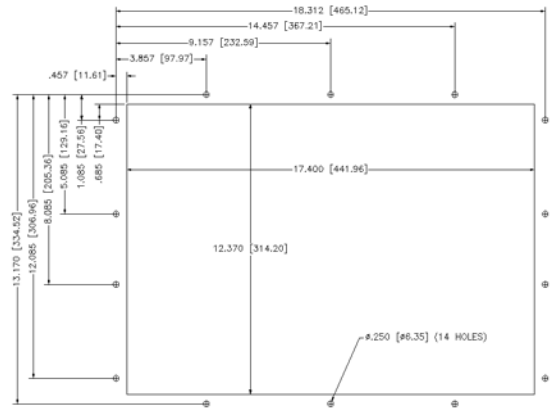

# PRODUCT SPECIFICATIONS

## Environmental

	Operating	Nonoperating
<b>Thermal</b>	0°C to 50°C	-20°C to 60°C
<b>Humidity</b>	20% to 80% RH, noncondensing	20% to 80% RH, noncondensing
<b>Shock <sup>a</sup></b>	15g peak acceleration, 11 msec duration	30g peak acceleration, 11 msec duration
<b>Vibration</b>	.006" peak to peak displacement	.015" peak to peak displacement
<b>5-2000 Hz <sup>a</sup></b>	1.0g maximum acceleration	2.5g maximum acceleration
<b>Altitude <sup>b</sup></b>	Sea level to 10,000 ft.	Sea level to 40,000 ft.

<sup>a</sup> These values are with solid state hard drives and not rotating media drives.

<sup>b</sup> Consistent with internal component specifications.

## Electrical

**Power Supply** 250 Watt AC

**AC Power** 100-240 VAC, 50-60 Hz,  
**4612** - 78 Watt nominal power †      **4615** - 88 Watt nominal power †

**Available Expansion Power**  
 +3.3V 4.0A maximum  
 +5V 4.0A maximum  
 -5V 160mA maximum  
 +12 3.0A maximum  
 -12 240mA maximum

† Nominal power is measured for a base configuration only. Any additional expansion and/or devices will increase the input power required.

## PRODUCT RATINGS

### Compliance

#### Regulatory Compliance

##### CE

- EN 55022: Class A
- EN 61000-6-2
- EN 61000-3-2, Class A
- EN 61000-3-3
- IEC 60950-1

##### FCC

- 47 CFR, Part 15, Class A

#### Safety Agency Approvals

##### UL

- UL 508 Listed
- UL 1604 Listed <sup>a</sup>

##### CUL

- CSA-C22.2, #142 Listed
- CSA-C22.2, #213 Listed <sup>a</sup>

<sup>a</sup> Class I Division 2, Groups A, B, C, D; Class II, Division 2, Groups F and G; Temp. Code: T6

#### Front Panel

- NEMA 4/4X/12, IP65



Product certification documentation available at: [www.profaceamerica.com/certifications](http://www.profaceamerica.com/certifications)

## ORDERING INFORMATION

To create an order number, follow the conventions defined by the example order numbers and product configurations.

### Example Order Number

Order Number	Description
<b>4612T-1300-512-DVDW-XP</b>	4612T with Touchscreen front panel, Intel® Celeron® M 1.3 GHz, (512K Cache, 400 MHz bus), 512 MB DRAM, 80 GB minimum Hard Drive, Rear Access DVD R/W, Windows XP operating system, On-board 10/100 and 10/100/1000 BaseT Ethernet, USB, one (8.0" max.) PCI, two (9.0" max.) PCI, and one (9.0" max.) PCI or ISA available expansion slots.
<b>4612</b>	-
<b>Display and Operator Input</b>	
T	12" w/ Touchscreen only
KPM	12" w/ Keypad & Mouse
KPMT	12" w/ Keypad, Mouse, & Touch
<b>CPU</b>	
1300	Celeron M 1.3 GHz, 512K Cache, 400 MHz bus
2000	Pentium M 2.0 GHz, 2M Cache, 533 MHz bus
<b>DRAM</b>	
-512	512 MB DRAM
-1000	1 GB DRAM
-2000	2 GB DRAM
<b>Internal Hard Drive</b>	
Blank	Internal 80 GB (min.) Serial ATA Hard Drive
-ND	No Internal Hard Drive <sup>a</sup>
-DHD	Dual Internal 80 GB (min.) Serial ATA Hard Drives
<b>Rotating Media Drives</b>	
Blank	No Rear Access Media Drive
-DVDW	Rear Access Read/Write DVD-ROM Drive <sup>b</sup>
<b>Floppy</b>	
Blank	No Floppy Installed <sup>c</sup>
-F	Rear Access Floppy Installed
<b>Externally Accessible CompactFlash</b>	
Blank	Nothing Installed
-4GCF	4 GB CompactFlash Installed <sup>d</sup>
<b>Operating System</b>	
-XP	Pre-Activated Windows XP Professional
-2K	Windows 2000 (multi-language)
-NOS	No Operating System loaded

**Warranty Information**  
The 4612 series carries a two-year parts & labor warranty.

<sup>a</sup> 4GB CompactFlash option must be chosen when selecting the -ND option. <sup>b</sup> When ordering CDW or DVDW options and No Operating System all required drivers will not be loaded and devices will not function properly. <sup>c</sup> When ordering a unit with no floppy operating system recovery will not be possible without adding an external USB floppy drive. <sup>d</sup> When ordering CompactFlash and no internal hard drive the operating system will be loaded on the CompactFlash. This is not recommended when applications are storing data.

**Important Notice for XP configurations:** Certain Microsoft® software product(s) included with this computer may use technological measures for copy protection. IN SUCH EVENT, YOU WILL NOT BE ABLE TO USE THE PRODUCT IF YOU DO NOT FULLY COMPLY WITH THE PRODUCT ACTIVATION PROCEDURES. Product activation procedures and Microsoft's privacy policy will be detailed during initial launch of the product, or upon certain reinstallations of the software product(s) or reconfigurations of this computer, or may be completed by Internet or telephone (toll charges may apply).

## ORDERING INFORMATION (continued)

### Example Order Number

Order Number	Description
4615T-1300-512-DVDW-XP	4615T with Touchscreen front panel, Intel® Celeron® M 1.3 GHz, (512K Cache, 400 MHz bus), 512 MB DRAM, 80 GB minimum Hard Drive, Rear Access DVD-R/W Windows XP operating system, On-board 10/100 and 10/100/1000 BaseT Ethernet, USB, one (8.0" max.) PCI, two (9.0" max.) PCI, and one (9.0" max.) PCI or ISA available expansion slots.

4615 -

#### Display and Operator Input

T	15" w/ Touchscreen only
KPM	15" w/ Keypad & Mouse
KPMT	15" w/ Keypad, Mouse, & Touch

#### CPU

1300	Celeron M 1.3 GHz, 512K Cache, 400 MHz bus
2000	Pentium M 2.0 GHz, 2M Cache, 533 MHz bus

#### DRAM

-512	512 MB DRAM
-1000	1 GB DRAM
-2000	2 GB DRAM

#### Internal Hard Drive

Blank	Internal 80 GB (min.) Serial ATA Hard Drive
-ND	No Internal Hard Drive <sup>a</sup>
-DHD	Dual Internal 40 GB (min.) Serial ATA Hard Drives

#### Rotating Media Drives

Blank	No Rear Access Media Drive
-DVDW	Rear Access Read/Write DVD-ROM Drive <sup>b</sup>

#### Floppy

Blank	No Floppy Installed <sup>c</sup>
-F	Rear Access Floppy Installed

#### Externally Accessible CompactFlash

Blank	Nothing Installed
-4GCF	4 GB CompactFlash Installed <sup>d</sup>

#### Operating System

-XP	Pre-Activated Windows XP Professional
-2K	Windows 2000 (multi-language)
-NOS	No Operating System loaded

<sup>a</sup> 4GB CompactFlash option must be chosen when selecting the -ND option. <sup>b</sup> When ordering CDW or DVDW options and No Operating System all required drivers will not be loaded and devices will not function properly. <sup>c</sup> When ordering a unit with no floppy operating system recovery will not be possible without adding an external USB floppy drive. <sup>d</sup> When ordering CompactFlash and no internal hard drive the operating system will be loaded on the CompactFlash. This is not recommended when applications are storing data.

**Important Notice for XP configurations:** Certain Microsoft® software product(s) included with this computer may use technological measures for copy protection. IN SUCH EVENT, YOU WILL NOT BE ABLE TO USE THE PRODUCT IF YOU DO NOT FULLY COMPLY WITH THE PRODUCT ACTIVATION PROCEDURES. Product activation procedures and Microsoft's privacy policy will be detailed during initial launch of the product, or upon certain reinstallations of the software product(s) or reconfigurations of this computer, or may be completed by Internet or telephone (toll charges may apply).

#### Warranty Information

The 4615 series carries a two-year parts & labor warranty.

#### Pro-face America

Phone: 734.429.4971  
Fax: 734.429.1010  
www.profaceamerica.com

Customer Service Hotline: 734.944.0482

For more information

ACCESS

www.profaceamerica.com

**Pro-face**

© 2007 Pro-face America. Specifications may change without notice.

Xycom is a trademark of Xycom Automation, LLC. Other brand or product names are the property of their respective owners.



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)