



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?


Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Relay Module for Compact FieldPoint

NI cFP-RLY-425 *NEW!*

- 8 Form A (SPST) electromechanical relays
- Switch 5 A at 18 VDC or 150 VAC
- Switch 0.2 A at 125 VDC or 3 A at 250 VAC
- Direct connectivity, no connector block required
- Hot-swappable with autoconfiguration
- -40 to 70 °C operating range

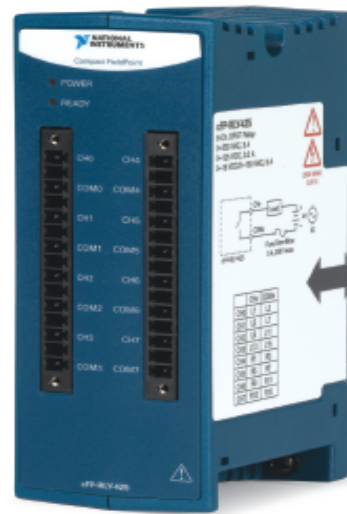

Overview

The National Instruments cFP-RLY-425 is a versatile relay module for Compact FieldPoint that you can use for controlling digital signals ranging from low voltage to 125 VDC and to 250 VAC. It can switch up to 5 A on each of its eight channels and features a 250 V Category II safety installation rating. This module is commonly used to control indicator lights, motors, and power circuits.

Relay Module

The NI cFP-RLY-425 provides built-in module-to-module isolation to protect your Compact FieldPoint system and controller from high voltage levels. With the electrically isolated output relays, you can use each channel with a different voltage potential.

The module features a maximum switching frequency of 0.5 Hz (2 s/operation). Overall data throughput depends on software loop speeds and network speeds. Indicator lights show power and ready state.

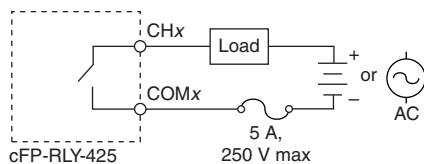


Figure 1. Wiring Schematics for RLY Module

Isolation

The cFP-RLY-425 module provides double insulation for up to 250 V_{rms} of operational isolation.

Power Requirements

Because the cFP-RLY-425 is a high power consumption module, it could limit the number of I/O modules that you can connect to a single network interface module. Controllers and network interface modules supply up to 9 W to power I/O modules. The cFP-RLY-425 requires up to 1.45 W.

Field I/O Connections

Each input channel on the cFP-RLY-425 has two terminals:

1. Relay common terminal (COMx)
2. Normally open terminal (CHx)

No terminal block is required for this module because the signal I/O connectivity is integrated directly into the module housing.

Ordering Information

NI cFP-RLY-425777318-425

BUY NOW!

For complete product specifications, pricing, and accessory information, call (800) 813 3693 (U.S. only) or go to ni.com/compactfieldpoint.



Relay Module for Compact FieldPoint

Specifications


Typical for -40 to 70 °C unless otherwise noted.

Relay Characteristics

Number of channels.....	8
Relay type.....	SPST, normally open, nonlatching
Maximum switching capacity (resistive load)	
AC	5 A at 150 VAC 3 A at 250 VAC
DC	5 A at 18 VDC 0.2 A at 125 VDC
Maximum switching power.....	750 VA, 90 W
Simultaneous channels at maximum switching current (<55 °C).....	8
Minimum switching load.....	1 mA at 5 DC
Initial contact resistance.....	<0.03 Ω
Expected relay life	
Mechanical	2 x 10 ⁷ operations
Electrical	1.5 x 10 ⁶ operations at 5 A, 30 VDC 1.5 x 10 ⁶ operations at 3 A, 120 VAC 1.5 x 10 ⁶ operations at 0.2 A, 125 VDC 3 x 10 ⁴ operations at 5 A, 250 VAC
Operate time	<10 ms
Release time	<7 ms
Contact bounce	<1 ms
Contact material.....	Gold overlay silver alloy

Power Derating

Load derating is dependent on the ambient temperature and the sum of the current squared of each channel simultaneously carrying a signal.

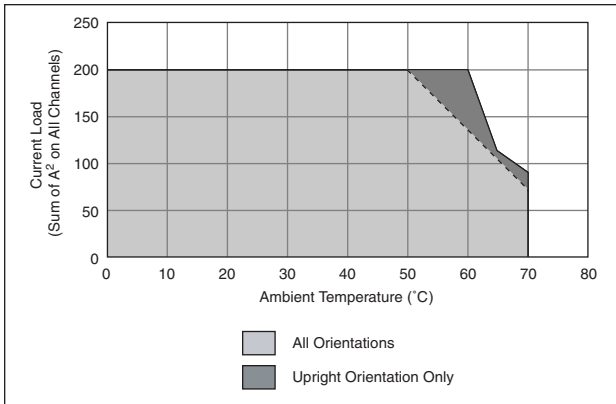

Power Requirement (from Network Module)

cFP-RLY-425	1.45 W
-------------------	--------

Physical Characteristics

LED indicators	
Power (green)	Indicates power-on and self-test passed
Ready (green).....	Indicates module is configured and ready
I/O connector.....	Combicon type
Dimensions.....	4.87 by 7.29 by 12.8 cm
Weight	201.4 g (7.11 oz)

Isolation Voltage (verified by a dielectric withstand test)

Maximum isolation voltage	250 V _{rms} , Installation CAT II
Channel-to-channel and Channel-to-Bus isolation.....	250 V _{rms} , CAT II continuous, 2300 V _{rms} , 1 minute

Environmental

Operating temperature.....	-40 to 70 °C
Storage temperature.....	-55 to 85 °C
Relative humidity	10 to 90% noncondensing
Maximum altitude.....	2000 m; at higher altitudes, you must lower the isolation voltage
Pollution degree	2

Safety

This product is designed to meet the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 3121-1, UL 61010C-1
- CAN/CSA C22.2 No. 1010.1

Electromagnetic Compatibility

CE, C-Tick, and FCC Part 15 (Class A) Compliant	
Emissions.....	EN 55011 Class A at 10 m FCC Part 15A above 1 GHz
Immunity.....	EN 61326:1997 +A2:2001, Table 1


CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE Marking, as follows:

Low-Voltage Directive (safety).....	73/23/EEC
Electromagnetic Compatibility Directive (EMC)	89/336/EEC

NI Services and Support

NI has the services and support to meet your needs around the globe and through the application life cycle – from planning and development through deployment and ongoing maintenance. We offer services and service levels to meet customer requirements in research, design, validation, and manufacturing. Visit ni.com/services.



Training and Certification

NI training is the fastest, most certain route to productivity with our products. NI training can shorten your learning curve, save development time, and reduce maintenance costs over the application life cycle. We schedule instructor-led courses in cities worldwide, or we can hold a course at your facility. We also offer a professional certification program that identifies individuals who have high levels of skill and knowledge on using NI products. Visit ni.com/training.

Professional Services

Our Professional Services Team is comprised of NI applications engineers, NI Consulting Services, and a worldwide National Instruments Alliance Partner program of more than 600 independent consultants and integrators. Services range from start-up assistance to turnkey system integration. Visit ni.com/alliance.



OEM Support

We offer design-in consulting and product integration assistance if you want to use our products for OEM applications. For information about special pricing and services for OEM customers, visit ni.com/oem.

Local Sales and Technical Support

In offices worldwide, our staff is local to the country, giving you access to engineers who speak your language. NI delivers industry-leading technical support through online knowledge bases, our applications engineers, and access to 14,000 measurement and automation professionals within NI Developer Exchange forums. Find immediate answers to your questions at ni.com/support.

We also offer service programs that provide automatic upgrades to your application development environment and higher levels of technical support. Visit ni.com/ssp.

Hardware Services

NI Factory Installation Services

NI Factory Installation Services (FIS) is the fastest and easiest way to use your PXI or PXI/SCXI combination systems right out of the box. Trained NI technicians install the software and hardware and configure the system to your specifications. NI extends the standard warranty by one year on hardware components (controllers, chassis, modules) purchased with FIS. To use FIS, simply configure your system online with ni.com/pxiadvisor.

Calibration Services

NI recognizes the need to maintain properly calibrated devices for high-accuracy measurements. We provide manual calibration procedures, services to recalibrate your products, and automated calibration software specifically designed for use by metrology laboratories. Visit ni.com/calibration.

Repair and Extended Warranty

NI provides complete repair services for our products. Express repair and advance replacement services are also available. We offer extended warranties to help you meet project life-cycle requirements. Visit ni.com/services.



ni.com • (800) 813 3693

National Instruments • info@ni.com

© 2005 National Instruments Corporation. All rights reserved. National Instruments, National Instruments Alliance Partner, FieldPoint, NI, ni.com, and SCXI are trademarks of National Instruments. Other product and company names listed are trademarks or trade names of their respective companies.

A National Instruments Alliance Partner is a business entity independent from NI and has no agency, partnership, or joint-venture relationship with NI.

Artisan Technology Group - Quality Instrumentation ... Guaranteed | (888) 88-SOURCE | www.artisan-tg.com



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com