



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com



- compactflash
- ▶ compliant
- host bus adapter

- single pmc (pci mezzanine card) form factor
- ▶ pci rev. 2.1 compliant
- available with front panel ejector or recessed
- ▶ flash cards as large as 175mbyte or magnetic disks up to 320mbyte
- boot any os such as nt, rtos, etc.
- ▶ from single compactflash
- runs under the os file system
- ▶ industry's first
- compactflash host bus adapter




the pmc234 family of embedded disk modules

offers a
totally new,
low cost
option for file
system and
boot storage.

the environmental data for micro drivers is as follows:

ambient temperature 5 to 55° c -40 to 65° c
relative humidity (noncondensing) 8% to 90% 5% to 95%
maximum wet bulb (noncondensing) 29.4 40
shock (half sine wave) 150 g (2 ms) 1000 g (1 ms)
vibration (random [rms]) 0.67 g (5 to 500 hz) 3.01 g (5 to 500 hz)
vibration (swept sine) 1 g 0-peak (5 to 500 hz) na

for harsh

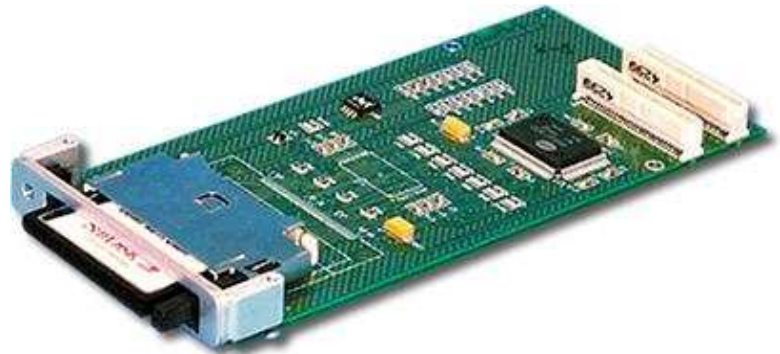

environments the flash option is more optimal:

ambient temperature -40° c to +85° c (industrial temp.)
shock 2kg
vibration 15g peak-to-peak

as always, ramix is dedicated to providing a full solution: software
support is included.

electrical / mechanical

power 1w (max)

size ieee 1386, standard single pmc card

operating temperature 5° c to +55° c (using rotary disk); with flash
option available in extended temperature (-40°
to +85°)

relative humidity 5% to 95% (non-condensing)

ordering info

when ordering specify the pmc234 model followed by operating system
and processor architecture

part number pmc234 or pmc234rg (for recessed socket)

(cf16) 16 mbyte solid state disk (cf32) 32 mbyte solid state disk

(cf64) 64 mbyte solid state disk (cf96) 96 mbyte solid state disk

(cf128) 128 mbyte solid state disk (cf160) 160mbyte solid state disk

(cf300) 300 mbyte solid state disk

(cftt1) 170mbyte micro drive

disk size

(cftt2) 340mbyte micro drive

software environment (sev) vxworks (sed) digital unix
(sel) lynxos (ses) solaris
(sep) psos (seu) custom

processor architecture (arc) power pc (ar6) r6000
(ar8) 68k (arf) alpha
(ars) sparc (arx) custom

example pmc234-cf16-sev-arc// pmc234 with 16 mbyte disk in vxworks environment on power pc



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com