



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

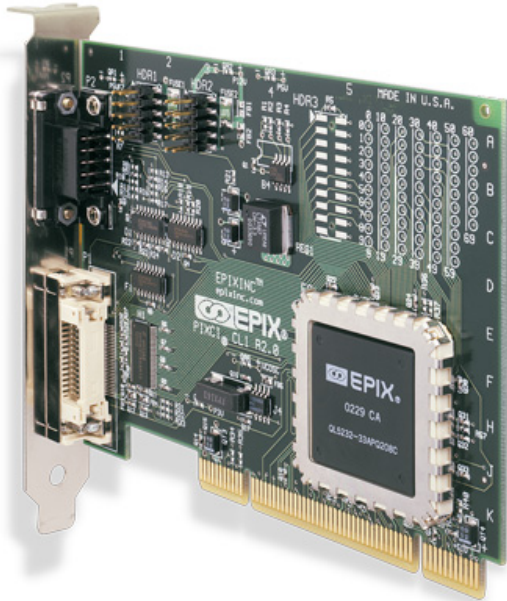

[Specs](#)
[Selection Guide](#)
[Manual](#)
[Pricing](#)
[Ordering](#)
[Software](#)
[XCAP](#)
[XCLIB](#)
[PXIPL](#)
[Optional
TTL Module](#)
[PDF](#)

PIXCI® CL1

Base Camera Link for PCI

Features

- PCI bus frame grabber
- 132 megabytes per second burst DMA transfer rate
- 100 megabytes per second sustained transfer rate
- 32-bit memory addressing



Capture

- Base Camera Link camera
- Line scan or area scan cameras

- Base Camera Link Frame Grabber
- 32 Bit PCI Bus
- Windows & Linux, 32 & 64-bit



- Monochrome or color cameras
- Individual lines or frames
- Continuous video
- Up to 4,096 pixels per line
- Up to 4,096 lines per image (area scan)
- Up to 65,534 lines per image (line scan)
- Triggered image sequence

Trigger and I/O

- Camera exposure and asynchronous reset control

- Trigger and frame enable inputs
- Strobe output
- General purpose inputs and outputs
- 26 pin MDR Camera Link connector
- 9 pin Dsub for trigger and I/O

Specifications

- 5 volts @ 530 mA
- 32 bit / 33 MHz PCI bus master, or 64 bit / 66 MHz PCI bus master slot
- 3.3 or 5volt PCI signaling
- 12.5 cm long, 8.3 cm high, 4.91" long by 3.27" high
- 77 grams, 2.7 ounces
- 0 to 70 degrees Celsius operation
- CE, FCC, ROHS compliant
- Camera pixel clocks from 20 to 85 MHz
- Made in U.S.A.

Software

- [XCAP-Lite](#) image capture, display, and save program included with frame grabber purchase
- [XCAP-LTD](#) captures video to computer memory [and more..](#)
- [XCAP-STD](#) streams video to disk and performs image processing [and more..](#)
- [PIXCI Selection Guide](#) lists cameras supported with dedicated Capture & Adjust dialogs
- XCAP supports all camera link cameras connected to PIXCI® frame grabbers
- [XCLIB](#) programmer libraries for frame grabber and camera control
- [PXIPL](#) image processing, measurement, and analysis libraries
- Windows & Linux, 32 & 64-bit
- TWAIN compatible
- [3rd Party](#) software solutions also available.

TTL MODULE



The optional [TTL Module](#) minimizes false triggers when using a TTL trigger with a cable longer than one foot. The TTL MODULE converts the TTL trigger into a differential signal for reliable triggering with up to 200 feet of cable. The TTL MODULE also can generate a TTL strobe from the attached PIXCI®

board. Compatible with PIXCI® CL1, CL2, CL3SD, D2X, D3X, SI, and SI4.

SPECIFICATIONS

RESOLUTION:

- 8 to 4,096 pixels per line
- 1 to 4,096 lines per image (area scan)
- 1 to 65,534 lines per image (line scan)

SIGNALS:

Differential RS-644
Differential Trigger IN / Strobe OUT
2 TTL input/outputs

CONNECTIONS:

1 26-pin Camera Link
1 9-pin D-Subminiature
2 10-pin headers

MAXIMUM FRAME RATE:

Camera Dependent

CE / FCC CERTIFICATION:

PIXCI CL1 was tested per EMC directive 89/336/EEC and performed to class B.

BUS REQUIREMENTS:

32 bit, 33 MHz PCI bus master, or
64 bit 66 MHz PCI bus master
3.3V or 5V PCI Signaling

POWER DRAW:

Camera attached, capturing video: 530mA
Camera attached, not capturing video: 390mA
Camera not attached: 290mA

DIMENSIONS:

12.48 cm long by 9.4 cm high (4.913" x 4.20") [short slot]

[Back to EPIX Products](#)

Image Processing Products For Research and Industry

Specifications and prices subject to change without notice.

EPIX® imaging products are made in the USA.

[Terms of Sale.](#)

[Trademark Notices.](#)

Copyright © 2015 EPIX, Inc. All rights reserved.

Modified:
24-Sep-2015



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com