



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com



VMIVME-7453 Single-Slot VMEbus Floppy/Hard Disk Module for VMIVME-7588 and VMIVME-7686

- 1.3 Gbyte IDE hard drive
- 3.5-inch 1.44 Mbyte floppy drive
- Standard VMEbus 6U single-slot form factor
- Low power
- Low-density to high-density transition cable for front panel connection

INTRODUCTION — The VMIVME-7453 consists of one floppy and one hard disk drive mated to a 6U VMEbus board. Only power is derived from P1 and P2.

The VMIVME-7453 has been designed to interface to VMIC's line of VMEbus-compatible PC/AT, Pentium®, and Pentium Pro processor boards. These CPU boards incorporate the floppy and IDE controllers on-board.

Connection to the CPU boards is by way of flat cable that emerges from the front panel of the board and connects directly to the CPU board without using any P2 pins.

COMPATIBLE CPU BOARDS — The VMIVME-7453 is designed for use in conjunction with any of the following CPU boards: VMIVME-7588 and VMIVME-7686.

SPECIFICATIONS


Dimensions: Standard VME double height Eurocard (one slot)
160 x 233.35 x 20.32 mm

User Connectors: 34-pin floppy drive and 40-pin IDE

Ambient Temperature:
All Disks: 5 to 50 °C, operating
Storage: -22 to 60 °C
Rate: 20 °C per hour maximum

Humidity: 20 to 80 percent, noncondensing, maximum wet bulb 29 °C

Access Time:
Average Read: 16 ms
Average Write: 20 ms
Average Latency: 6.67 ms

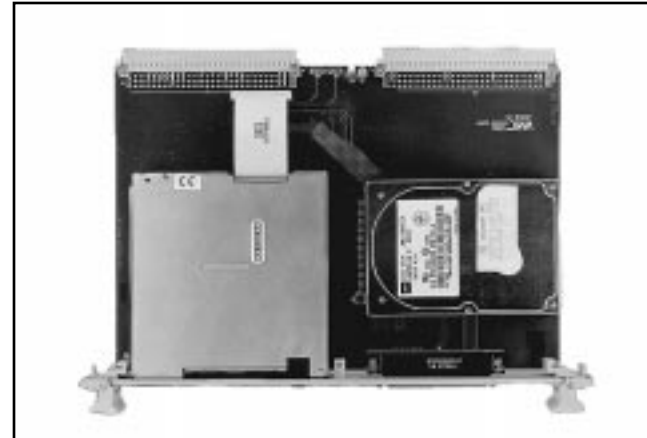

Power Requirements:

+5 V, 2.5 A maximum (spinup)
<1.0 A typical

TRADEMARKS

The VMIC logo is a registered trademark of VMIC. Pentium is a registered trademark of Intel Corporation. Other registered trademarks are the property of their respective owners.

Ordering Options							
July 8, 1997 800-007453-000 C	A	B	C	-	D	E	F
VMIVME-7453	-	0	0	-			
A = Indicates CPU Board to Be Mated with Disk Module 0 = For Use with VMIVME-7588, -7686							
BC = Indicates Disk Module Configuration 00 = Floppy Drive Only 01 = Floppy Drive and 1.3 Gbyte Hard Drive Capacity (1 Hard Drive)							
For Ordering Information, Call: 1-800-322-3616 or 1-256-880-0444 • FAX (256) 882-0859 e-mail: info@vmic.com Web Address: www.vmic.com Copyright © March 1996 by VMIC Specifications subject to change without notice.							



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com