



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

MAP Broadband Source (mBBS-A1)



Key Features

- Flattened output power spectrum
- High output power density
- High spectral stability
- Control and monitoring features
- Can be automated when used with MAP-200
- LXI-compliant interfaces and IVI drivers

Applications

- Optical component spectral tests
- Systems compliance tests
- Optical measurement systems
- Sensor and imaging experiments

Safety Information

- The MAP Broadband Source, when installed in a MAP chassis, complies to CE, CSA/UL/IEC61010-1, LXI Class C requirements, meets the requirements of Class 3B in standard IEC 60825-1 (2002), and complies with 21 CFR 1040.1 except deviations per Laser Notice No. 50, July 2001.




The Multiple Application Platform (MAP) Broadband Source (mBBS-A1) is optimized for the industry-leading JDSU MAP-200 platform. Based on the previous-generation Multiple Application Platform (MAP), the MAP-200 is the first photonic layer lab and manufacturing platform that is LAN Extensions for Instrumentation (LXI)-compliant by conforming to the required physical attributes, Ethernet connectivity, and interchangeable virtual instrument (IVI) drivers. The MAP-200 platform is optimized for density and maximum configurability to meet specific application requirements in the smallest possible foot print.

Utilizing the latest advances in erbium technology, the MAP BBS offers an amplified spontaneous emission (ASE) output that features flattened high power density across the C-band. The source provides high spectral stability.

The addition of the BBS Cassette can be used for many applications including OSNR (optical signal to noise ratio) experiments, calibration of test equipment, and noise source for active or passive component testing.

The MAP BBS models provide specialized variants and optical performance not available in the Benchtop BBS. Additional BBS models are available in the Benchtop BBS product line for applications requiring higher output power.

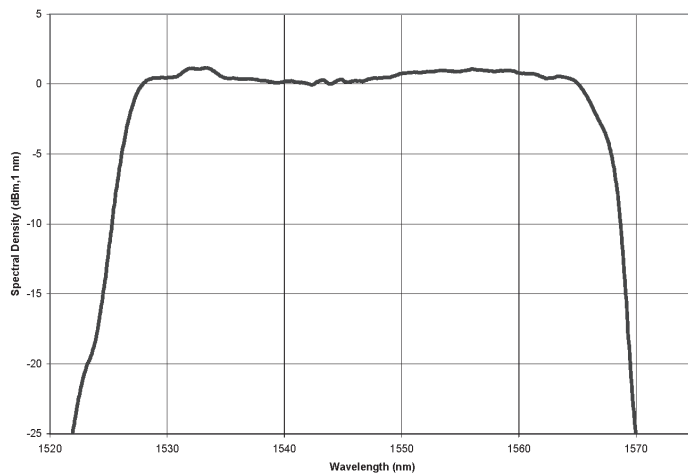

Spectral Density Plot
C-band 50 mW

Specifications

Parameter	C-Band 50 mW Output Power	C-Band 100 mW Output Power
Operating wavelength range	1527 to 1568 nm	1525 to 1568 nm
Total optical power (minimum) ¹	50 mW	100 mW
Spectral gain flatness (maximum) ²	1.8 dB	1.8 dB
Total output power stability	0.02 dB	
Output isolation (minimum)	45 dB	
Operating temperature	0 to 50°C	
Storage temperature	-30 to 60°C	
Humidity	Maximum 95% RH non-condensing from 0 to 45°C	
Dimensions (W x H x D)	4.06 x 13.26 x 37.03 cm (1.6 x 5.22 x 14.58 in)	
Weight	2.3 kg (5.07 lb)	

¹ Measured at 1550 nm at 23°C after one hour warm up

² Flatness range 1529 to 1565 nm for C-Band model

Ordering Information

For more information on this or other products and their availability, please contact your local JDSU account manager or JDSU directly at 1-800-498-JDSU (5378) in North America and +800-5378-JDSU worldwide or via e-mail at customer.service@jdsu.com.

Product Code	Description
Base Options (Required, select one)	
MBBS-A1C050	C-Band Broadband Source, 50 mW output power
MBBS-A1C100	C-Band Broadband Source, 100 mW output power
Connector Options (Required, select one)	
MFP	FC/PC connector type
MFA	FC/APC connector type



If the configurations available do not meet your performance requirements, please contact your global sales and customer service team to discuss the potential for specialized solutions.

UL is a registered trademark of Underwriters Laboratories, inc.

Test & Measurement Regional Sales

NORTH AMERICA TEL: 1 866 228 3762 FAX: +1 301 353 9216	LATIN AMERICA TEL: +1 954 688 5660 FAX: +1 954 345 4668	ASIA PACIFIC TEL: +852 2892 0990 FAX: +852 2892 0770	EMEA TEL: +49 7121 86 2222 FAX: +49 7121 86 1222	WEBSITE: www.jdsu.com/test
---	--	---	---	--

Product specifications and descriptions in this document subject to change without notice. © 2011 JDS Uniphase Corporation January 2011 30149426 003 0111 MAPBBS.DS.LAB.TM.AE



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com