



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)



# Intel® NetStructure™ ZT 5504 System Master Processor Board

## Introduction

Designed to the PICMG\* 2.16 specification, this processor board offers excellent value with an optimized feature set to support a broad range of telecom and Internet applications. Modular and standards-based, the Intel® NetStructure™ ZT 5504 System Master Processor Board supports efficient time-to-market development. It is validated with the Intel® NetStructure™ family of packet switched backplane (PSB) products, and is designed to interoperate with third-party, PICMG 2.16-compliant components.

The ZT 5504 board can function as a system master processor in a CompactPCI\* multi-processing system. It interfaces to the backplane through a transparent, PCI-to-PCI (P2P) bridge, allowing it to communicate directly with all peripheral CPU boards via the CompactPCI bus. Optionally, it can operate in drone mode, thus permitting its use as a stand-alone computer. On-board logic qualifies the location of the board when inserted into a peripheral slot, thereby isolating it from the bus.

The PICMG 2.16 CompactPCI Packet Switching Backplane Specification is designed to accelerate the convergence of telecom and Internet IP-based applications. Standards-based modular design simplifies development, and all slots are served by redundant fabric connections, supporting system failover in the event of a fabric failure. Backplane interconnect speeds are user-definable and scalable from 10 Mbps to 2000 Mbps per node slot.

## Highlights


### Computing Core

- 1 GHz Intel® Pentium® III processor — Low Power (BGA2) with 100 MHz processor side bus and 256 Kb L2 cache
- 512 Mb to 1 Gb ECC SDRAM with L1 and L2 cache memory
- Intel® 440 GX chipset

### Peripherals and I/O

- 64-bit/33 MHz CompactPCI interface
- 4 Mb on-board flash memory to support embedded applications
- 20 Gb EIDE hard drive and PMC site; optional CompactFlash\* carrier mezzanine card available in lieu of hard drive
- On-board 10/100 Mb Fast Ethernet LAN interfaces
- Optional CD-ROM drive mezzanine simplifies installation of software
- Universal Serial Bus (USB)
- On-board SVGA-compatible CHPS 69000 graphics controller with front-plate video connectors
- On-board, two stage programmable watchdog timer (1s, 8s, 64s, 256s) generates non-maskable interrupt (NMI or processor "INIT") followed by a hardware reset

Intel in  
Communications

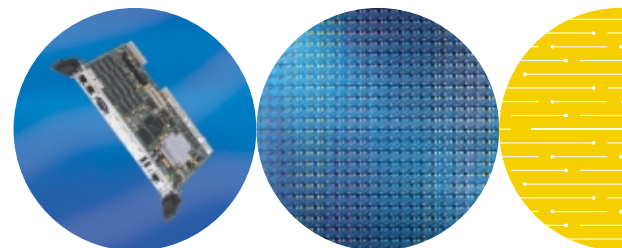

## Manageability

- Features integrated IPMI-based Baseboard Management Controller (BMC)
- Designed to PICMG 2.9 standards
- Supports comprehensive, protected lights-out management scheme (with the Intel® NetStructure™ ZT 7102 Chassis Management Module)
- Designed to IPMI 1.0 specifications for standards-based management and increased reliability

## Ethernet

- Two Ethernet ports deliver high networking performance
- Can be routed to rear panel through BIOS setup configuration
- Auto-configuring RJ-45 front-panel connectors
- Link and activity status LEDs

## Software and Support

- Embedded BIOS loaded in on-board flash
- User-configurable BIOS to boot an operating system residing in local flash memory, from a fixed or floppy drive, or over a network
- PC compatible to run operating systems developed for the PC
- Enhanced support provided for Windows\* 2000, Linux\*, and VxWorks\*
- Additional drivers for select peripherals and flash drives

Please reference the most up-to-date Order Configurations and Regulatory Compliance specifications along with additional product information at

[developer.intel.com/design/network/products/cbp/zt5504.htm](http://developer.intel.com/design/network/products/cbp/zt5504.htm)

## Specifications

The ZT 5090 platform is designed with the following standards:

- CompactPCI Core Specification, PICMG 2.0 R2.1
- CompactPCI Hot Swap, PICMG 2.1 R2.0
- CompactPCI Computer Telephony, PICMG 2.5 R1.0
- CompactPCI System Management, PICMG 2.9
- CompactPCI Power Interface, PICMG 2.11
- CompactPCI Packet Switching Backplane Specification, PICMG 2.16
- IPMI 1.0 Specification

### Power Req.

### Typical

Supply Voltage, Vcc	+5VDC +5%, -3%
Supply Current, Vcc=5.0VDC	4A
Supply Voltage, V3.3V	+3.3VDC +5%, -3%
Supply Current, V3.3V=3.3VDC	6A
Supply Voltage, V12.0V	+12VDC ±10%
Supply Current, V12V=12.0V	20mA

### Mechanical

- Measures 9.2" x 6.3" (233.35 mm x 160 mm)
- Width: 0.8" (1 slot - 4HP)
- Connector: IEC-1076-4-101 (J1-J5)

### Environmental

- Operating Temperature (requires 200 LFM airflow): 0° to 50° C
- Storage Temperature:
  - (with hard disk) -40° to +65° C
  - (without hard disk) -40° to +85° C
- Non-Condensing Relative Humidity: less than 95% at 40° C

### Peripherals and I/O Interfaces

I/O Interface	Front Panel	Rear Panel <sup>1</sup>	Compatibility
COM 1	RJ-45	J5	16550
COM 2	N/A	J5	16550
LPT 1	N/A	N/A	IEEE* 1284
VGA	15-pin D-shell	J5	with AGP
Keyboard	N/A	J5	PS/2-style
Mouse	N/A	J5	PS/2-style
Floppy	N/A	J5	PC/AT
EIDE	2.5"	J5	ultra DMA/33
Ethernet	RJ-45	J3	Intel® 82559
USB 0	4-pin USB	J5	USB Type A
USB 1	4-pin USB	J5	USB Type A

<sup>1</sup> The ZT 5504 may be configured with a companion rear-panel transition board (ZT 4807), specifically designed to support the available I/O signals.

## Intel Access

Networking and Communications Building Blocks:

[developer.intel.com/design/network](http://developer.intel.com/design/network)

Other Intel Support:

Intel Literature Center [developer.intel.com/design/litcentr/](http://developer.intel.com/design/litcentr/)  
(800) 548-4725 7 a.m. to 7 p.m. CST (U.S. and Canada)

International locations please contact your local sales office.

General Information Hotline:

(800) 628-8686 or (916) 356-3104 5 a.m. to 5 p.m. PST

For more information, visit the Intel Web site at: [developer.intel.com](http://developer.intel.com)

UNITED STATES AND CANADA  
Intel Corporation  
Robert Noyce Bldg.  
2200 Mission College Blvd.  
P.O. Box 58119  
Santa Clara, CA 95052-8119  
USA

EUROPE  
Intel Corporation (UK) Ltd.  
Pipers Way  
Swindon  
Wiltshire SN3 1RJ  
UK

ASIA-PACIFIC  
Intel Semiconductor Ltd.  
32/F Two Pacific Place  
88 Queensway, Central  
Hong Kong, SAR

JAPAN  
Intel Kabushiki Kaisha  
P.O. Box 115 Tsukuba-gakuen  
5-6 Tokodai, Tsukuba-shi  
Ibaraki-ken 305  
Japan

SOUTH AMERICA  
Intel Semicondutores do Brazil  
Rue Florida, 1703-2 and CJ22  
CEP 04565-001 Sao Paulo-SP  
Brazil

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. Intel products are not intended for use in medical, life saving, or life sustaining applications. Intel may make changes to specifications and product descriptions at any time, without notice.

\* Other names and brands may be claimed as the property of others.

Copyright © 2003, Intel Corporation. All rights reserved.

Intel, the Intel logo, NetStructure and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Printed in USA.

0203/0C/DC/PP/2.5K

 Please Recycle

252257-001





## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)