



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?


Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

S FLOAT TYPE FLOW SWITCH



Flow
Pressure
Level
Temperature
measurement
monitoring
control

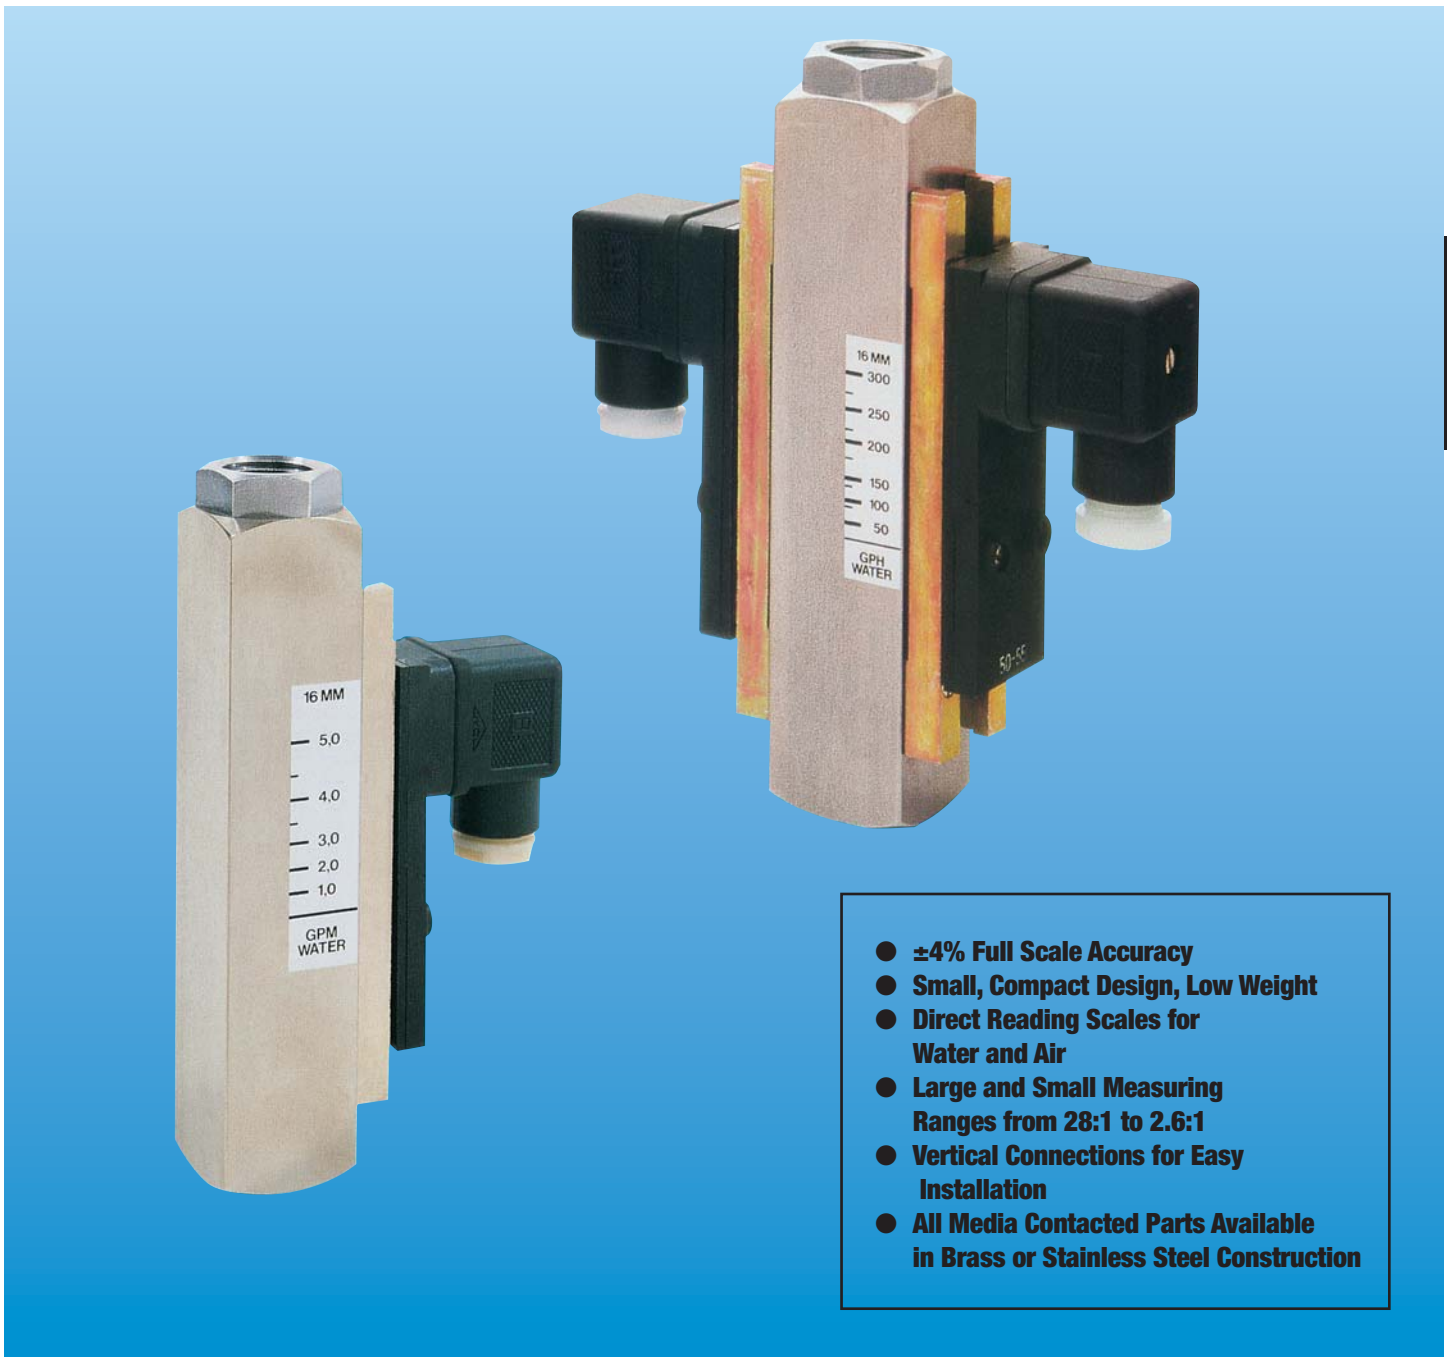

S2

- **±4% Full Scale Accuracy**
- **Small, Compact Design, Low Weight**
- **Direct Reading Scales for Water and Air**
- **Large and Small Measuring Ranges from 28:1 to 2.6:1**
- **Vertical Connections for Easy Installation**
- **All Media Contacted Parts Available in Brass or Stainless Steel Construction**



USA

KOBOLD Instruments Inc.
1801 Parkway View Drive
USA- Pittsburgh, PA 15205
☎ +1 412-788-2830
Fax +1 412-788-4890
E-mail: info@koboldusa.com



CANADA

KOBOLD Instruments Canada Inc.
9A Aviation
Pointe-Claire, QC H9R 4Z2
☎ +1 514-428-8090
Fax +1 514-428-8899
E-mail: kobold@kobold.ca

Visit KOBOLD Online at
www.kobold.com

Model:
S



Order Number for Standard Types

Range water GPM	Stand. conn. NPT	Press. drop max. PSI	Float Material		Flow switch 1 N/O contact water, stand.-conn.		Flow Switch 2 N/O contact water, stand.-conn.	
			Brass	SS	Brass	SS	Brass	SS
0.075- 0.25	1/4"	0.29	PP	PVDF	S-3101	S-3201	S-4101	S-4201
0.1 - 0.6	1/4"	0.29	PP	PVDF	S-3102	S-3202	S-4102	S-4205
0.3 - 2.3	1/4"	1.60	Brass	St. St.	S-3108	S-3208	S-4108	S-4208
0.75 - 4.0	1/4"	2.90	Brass	St. St.	S-3115	S-3215	S-4115	S-4215
1.0 - 5.0	1/4"	8.70	Brass	St. St.	S-3120	S-3220	S-4120	S-4220
0.6 -12	3/4"	3.22	Brass	St. St.	S-3150	S-3250	S-4150	S-4250
1 -14	3/4"	5.80	Brass	St. St.	S-3170	S-3270	S-4170	S-4270

Options
(add suffix to Order Number)

Range air SCFM Suffix "L"	Special conn. NPT Suffix "B"	Special contact Suffix "U"
0.2- 1.1	1/2"	SPDT- contact
0.3- 2.5	1/2"	
1.2- 8	1/2"	
2 -15	1/2"	
3 -20	1/2"	
2.5-50	-	
3 -70	-	


KOBOLD S- flow switches work on the well known variable area principle but without the use of the open conical measuring tube. Instead, the instruments use a cylindrical control tube with a conical groove along its axis. This makes for a very compact design. The flow switch can be used for continuous control of fluids and gases to insure that excess or low flow cannot result in damage to equipment. Applications can be found wherever it is necessary to control flow reliably.

Specifications

- Accuracy:** ±4% of full scale
- Flow Media:** liquids and gases
- Mounting:** vertical media flow bottom to top
- Measuring Principle:** with float and cylindrical control tube
- Mode of operation:** dependent on flow, not pressure
- Maximum Temperature:** 240°F, with PP or PVDF float: 160°F
- Maximum Pressure:** 3600 PSIG for Brass units, 5000 PSIG for SS units, 230 PSIG with PP or PVDF Floats

Wetted Parts

- Housing:** Brass or 304 SS
- Slotted Nozzle:** Brass or 304 SS
- Float:** Polypropylene or PVDF
- Seals:** Buna-N for Brass units, Viton for SS units
- Electr. Switch Housing:** Plastic
- Mode of Electr. Protection:** NEMA 4
- Reed Contact:** standard N/O max. 50VA, special SPDT max. 30VA UL, CSA approved

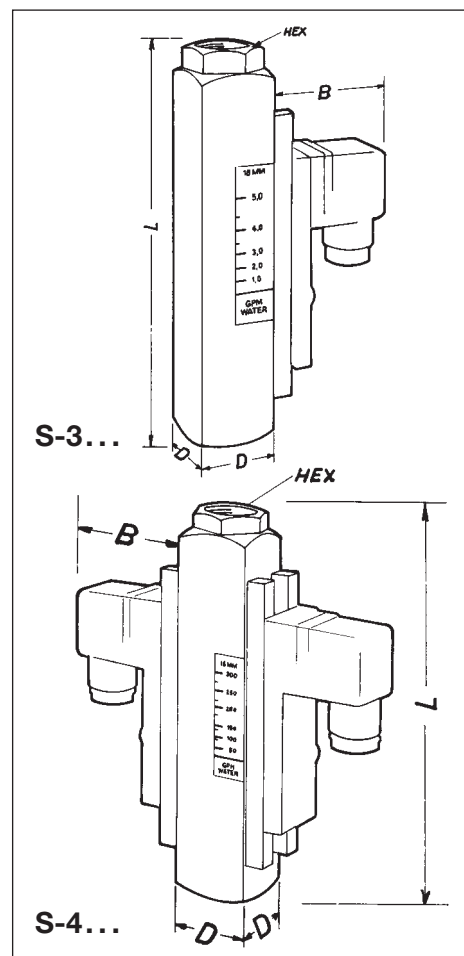

FLOAT TYPE FLOW SWITCH 1 N/O CONTACT

Order Number (Brass)	Order Number (SS)	HEX	Dimensions				Weight approx lbs
			D	Standard	L	B	
S 3101	S 3201	1.06"	1.18"×1.18"	5.20"	5.35"	2.09"	2.20
S 3102	S 3202	1.06"	1.18"×1.18"	5.20"	5.35"	2.09"	2.20
S 3108	S 3208	1.06"	1.18"×1.18"	5.20"	5.35"	2.09"	2.20
S 3115	S 3215	1.06"	1.18"×1.18"	5.20"	5.35"	2.09"	2.20
S 3120	S 3220	1.06"	1.18"×1.18"	5.20"	5.35"	2.09"	2.20
S 3150	S 3250	-	1.57"×1.57"	6.14"	n/a	2.09"	3.75
S 3170	S 3270	-	1.57"×1.57"	6.14"	n/a	2.09"	3.75

FLOAT TYPE FLOW SWITCH WITH 2 N/O CONTACTS

Order Number (Brass)	Order Number (SS)	HEX	Dimensions				Weight lbs
			D	Standard	L	B	
S 4101	S 4201	1.06"	1.18"×1.18"	5.20"	5.35"	2.09"	2.76
S 4102	S 4202	1.06"	1.18"×1.18"	5.20"	5.35"	2.09"	2.76
S 4108	S 4208	1.06"	1.18"×1.18"	5.20"	5.35"	2.09"	2.76
S 4115	S 4215	1.06"	1.18"×1.18"	5.20"	5.35"	2.09"	2.76
S 4120	S 4220	1.06"	1.18"×1.18"	5.20"	5.35"	2.09"	2.76
S 4150	S 4250	-	1.57"×1.57"	6.14"	n/a	2.09"	4.30
S 4170	S 4270	-	1.57"×1.57"	6.14"	n/a	2.09"	4.30

Subject to change without prior notice.



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com