



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?


Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

# XChange1104

Conduction- or Air-Cooled 6U cPCI Dual PrPMC Carrier Card with AMCC PPC440GX and PICMG 2.16

- ▶ AMCC PowerPC 440GX  
533-800 MHz processor
- ▶ 100-MHz PCI-X cPCI and  
local bus interfaces
- ▶ Autosense  
system/peripheral slot
- ▶ Hot swap support
- ▶ Up to 1 GB DDR-333  
SDRAM
- ▶ Up to 192 MB soldered  
flash
- ▶ 512 kB socketed flash
- ▶ Up to 1 GB CompactFlash
- ▶ Two front panel Gigabit  
Ethernet ports
- ▶ Front panel serial port
- ▶ Two PICMG 2.16  
backplane Ethernet ports
- ▶ Complies with PICMG 2.0,  
2.1, 2.3, 2.9 and 2.16
- ▶ VxWorks BSP
- ▶ Linux BSP
- ▶ IPMI driver

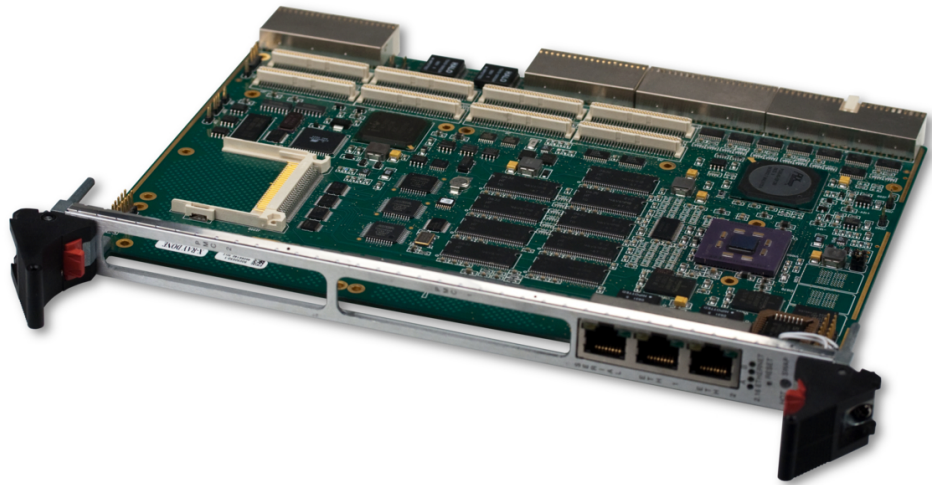

## XChange1104

The XChange1104 is a 6U CompactPCI dual PrPMC carrier card with a PICMG 2.16 Gigabit Ethernet interface. With PCI-X support on both CompactPCI and local bus interfaces, the XChange1104 is ideal for applications requiring high bandwidth and the flexibility that PMC modules offer.

Based on the AMCC PowerPC 440GX Embedded Processor, the XChange1104 is armed with the processing power needed for demanding applications. With integrated PCI-X, DDR SDRAM, and Gigabit Ethernet interfaces, the 440GX offers a highly-optimized, yet cost-effective solution for packet processing and general computing.

Hot swap support allows the XChange1104 to be installed into a live system without disrupting CompactPCI bus activity. In addition, system management bus support allows the card to be powered down and reset remotely through the IPMI interface.

# X-ES

Extreme Engineering Solutions

*...Always Fast*

### Extreme Engineering Solutions

3225 Deming Way, Suite 120 • Middleton, WI 53562

Phone: 608.833.1155 • Fax: 608.827.6171

sales@xes-inc.com • <http://www.xes-inc.com>

**Processor**

- AMCC PowerPC 440GX processor
- 800 MHz max processor speed
- 100 MHz PCI-X Interface
- 32 kB L1 instruction / data caches
- 256 kB L2 cache / SRAM
- DDR-333 SDRAM interface
- Two 10/100/1000-Mbps Ethernet controllers

**Memory**

- Up to 1 GB DDR-333 SDRAM
- Up to 192 MB soldered flash
- 512 kB socketed flash
- Up to 1 GB CompactFlash
- 512 byte SEEPROM

**cPCI**

- 66 MHz 64-bit PCI interface to J1 and J2
- PICMG 2.1 (hot swap support)
- PICMG 2.3 (PMC I/O to J3 and J5)
- PICMG 2.9 (dedicated IPMI controller)
- PICMG 2.16 (two 10/100/1000BASE-T Ethernet ports)

**PCI-X PMC Slots**

- Maximum aggregate bandwidth of 1 Gbps
- Processor PMC (PrPMC) support
- 10 mm stacking height

**Software Support**

- Linux BSP
- Wind River VxWorks BSP
- Ethernet and IPMI drivers

**Front Panel**

- Serial interface
- Two 10/100/1000 Ethernet ports

**Physical**

- 6U cPCI form factor
- 233.35 mm x 160 mm

**Environmental Requirements**


Contact factory for appropriate board configuration based on environmental requirements.

- Supported ruggedization levels (see chart below): 1
- Conformal coating available as an ordering option

**Power Requirements**

- 3.3V, 3.48 A, 11.5 W
- 5V, 0.1 A, 0.5 W

Supported Ruggedization Level	Level 1
Cooling Method	Standard Air-Cooled
Operating Temperature	0 to +55 °C ambient (300 LFM)
Storage Temperature	0 to +85 °C ambient
Vibration	0.002 g <sup>2</sup> /Hz, 5 to 2000 Hz
Shock	20 g, 11 ms sawtooth
Humidity	0% to 95% non-condensing

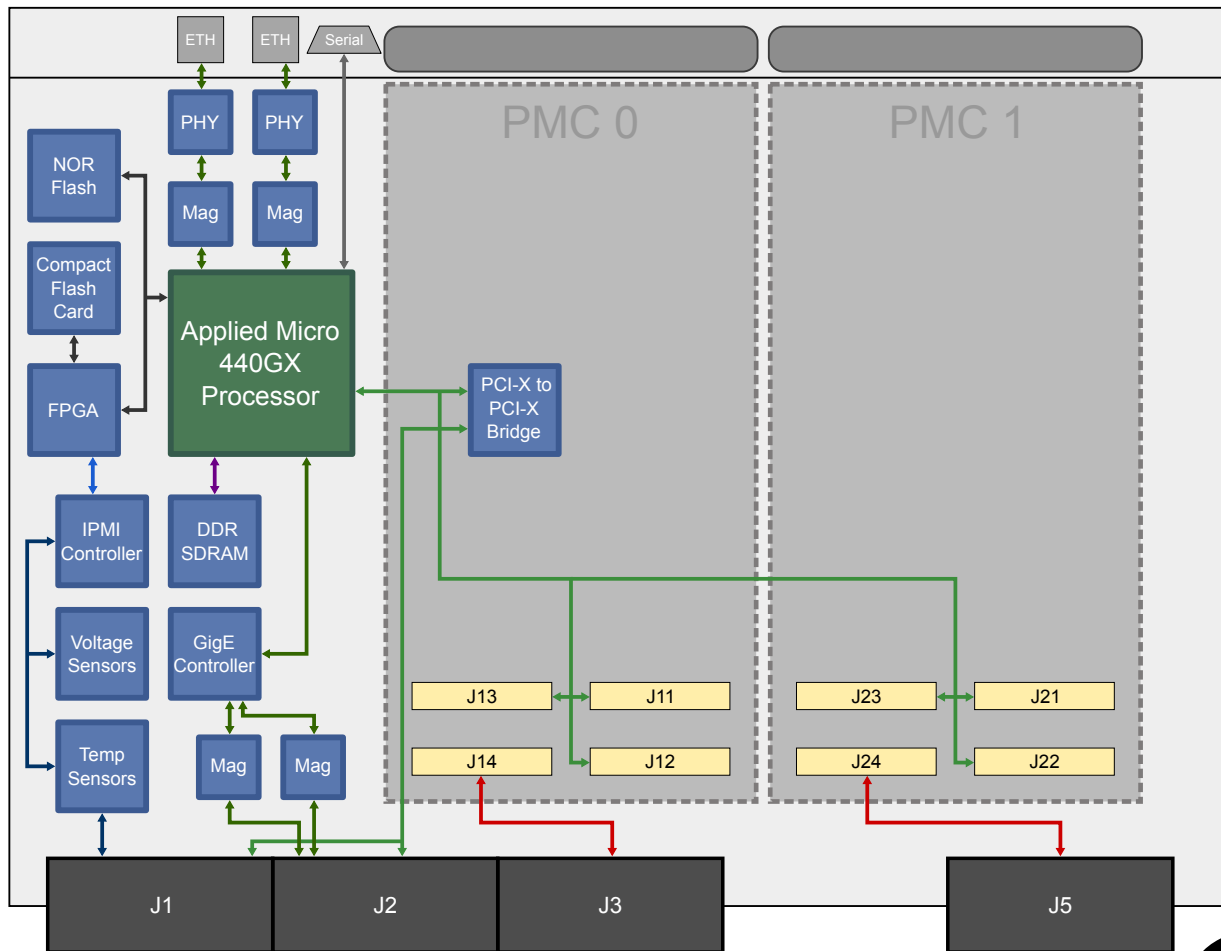

XChange1104





## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)