



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com



ABI-PCI

MIL-STD-1553 Interface

Features

1 or 2 dual redundant 1553 channels featuring 100% concurrent and independent operation as a:

- Bus Controller
- 31 Remote Terminals
- Dual Function Bus Monitor

Bus Controller

- Programmable frame lists
- BC-RT, RT-BC, RT-RT
- Mode codes, broadcasts, and time delays

RT Functionality

- RT level protocol selection
- RT definition tables
- Programmable response time

Bus Monitor


- Map monitoring
- Sequential monitoring
- Time stamped
- Double buffered
- Error tables
- Definable monitoring

Architecture

- On-the-fly data structures
- BC and RT linked lists
- High-speed DSP
- Flexible memory structure
- Flash memory
- Variable voltage 1553 transceivers
- Support for 5 V and 3.3 V PCI bus (dual channel only)

Software Support

- Complimentary drivers for most operating systems
- Integrated Avionics Library, including source code

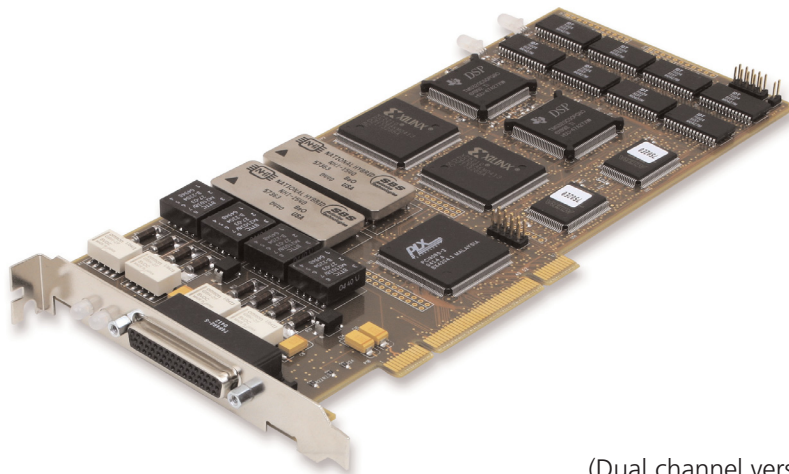

(Dual channel version shown)

ABI-PCI interface provides a flexible, full function, dual redundant MIL-STD-1553 interface to the PCI backplane. This Advanced Bus Interface (ABI) architecture provides concurrent and independent operation of a Bus Controller (BC), 31 Remote Terminals (RT), and dual function Bus Monitoring (BM). The ABI-PCI interface equips the PCI bus system with a complete 1553 interface. This includes 1553A/1553B selections, pointer-driven transmit and receive buffers and extensive programmable event interrupts.


BC simulation structures consist of linked lists of 1553 command messages: BC-to-RT, RT-to-BC, RT-to-RT, mode code, broadcast and time delay block transmissions. We define RT simulation as a simple series of pointers to RT definition tables. The RT definition tables in turn point to control data buffers. We define the bus activity we want to monitor in both the Map and Sequential monitoring modes. This provides user defined linked lists of data buffers and sequential 1553 activity. The user can time stamp and/or double buffer the 1553 activity. Both monitoring modes perform broad error monitoring. They also provide a comprehensive error table that the host processor can read at any time.

Hardware Overview

SBS bases the ABI interface upon an advanced high speed DSP, programmable logic and dual port RAM. It delivers a highly reliable hardware platform that is feature rich and user friendly. Through the 128 kB of dual port RAM per channel, the host processor has access to set up, monitor, and change the 1553 interface data structures at any time. Link-list memory architecture allows the user to structure interface memory usage for the maximum in flexibility and usefulness.

Software Support Overview

SBS distributed software includes host processor device drivers to the dual port control and data structures as well as an application layer to these structures. SBS also provides low-level drivers for most operating systems, and the Integrated Avionics Library with source code, with the interface at no additional cost.

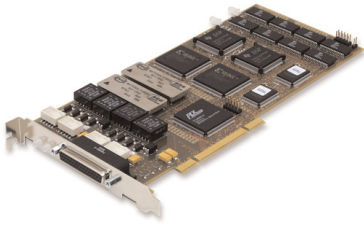

ABI-PCI

Configurations

Model Number	Configuration
ABI-PCI-1	Single Channel 1553 to PCI interface
ABI-PCI-2	Dual Channel 1553 to PCI interface
IRIG	IRIG B Time Receiver (add /IRIG to product number)

Specifications

ABI Functionality: Bus Controller (BC)

- BC retry
- Minor frame timing and message scheduling
- Intermessage gap selectable
- Programmable delay gaps and null BC blocks
- Multiple BC data buffers in a linked list structure
- Programmable RT no-response time-out

Remote Terminals (RTs)

- 31 RTs and all subaddresses supported
- Transmit/Receive buffers for each sub-address
- Multiple RT data buffers in a linked list structure
- Programmable RT response time and no-response selection

Map Monitoring

- Multiple linked buffers for each transmit/receive subaddress
- Mapped buffers read by host processor as time permits
- Number of buffers per transmit/receive subaddress is programmable or user definable to account for various host speeds

Sequential Monitoring

- Host driver selected messages are double buffered
- Messages time stamped with a 1 μ s 32-bit clock or optional 48-bit IRIG-B clock
- Standard firmware performs broad error monitoring
- Comprehensive error table readable at any time by host processor

Self Test

- Power-up test with status register report
- BIT-RAM and encoder/decoder test
- Run-time health status register
- Unit Test application for 1553 bus functionality

Inputs/Outputs

- Bi-directional external trigger
- IRIG clock input (optional)
- Variable voltage 1553 outputs: 0-22 V p-p
- External TTL/RS-422 system clock input

PCI Functionality

- PCI bus is 2.1 compliant
- 50 MB per second maximum transfer rate
- 16-bit and 32-bit transfer modes
- Programmable DMA controller
- On-board firmware storage via Flash memory
- Support for 5 V and 3.3 V PCI bus (dual channel only)

Interface Connections

- DB44_F to coupling harness - Single: CA-2088 Dual: CA-2087
- Coupling harness to bus and I/O connectors
- DB15_F I/O connector
- BJ77_F Triax connector to 1553 bus

Interface Card Specifications

- Mechanical - single channel: 1/2 length PCI bus card Length: 6.875" Height: 4.2"
- Mechanical - dual channel: 3/4 Length PCI bus card Length: 9.5" Height: 4.2"
- Maximum power consumption (98% bus activity) - single channel: 5 V @ 1.0 A, 12 V @ 125 mA
- Maximum power consumption - dual channel: 5 V @ 1.5 A, 12 V @ 250 mA
- Standard commercial temperature: 0° C to +60° C 95% rH non-condensing

Software and Documentation Support

- Low-level drivers for most operating systems
- Integrated Avionics Library with source code
- Borland and Microsoft® C Compiler compatible
- Hardware and Integrated Avionics Library documentation included on CD. Hard copies of the documentation are available upon request.

Customer Support

- Two-year warranty
- Extended warranties available
- Driver and library upgrades
- Over 18 operating systems supported on various platforms

Corporate Headquarters

7401 Snaproll NE
Albuquerque, NM 87109
Tel 505-875-0600 Fax 505-875-0400
Email info@sbs.com

European Headquarters

Memminger Str. 14
D-86159 Augsburg, Germany
Tel +49-821-5034-0 Fax +49-821-5034-119
Email sales@sbs-europe.com

For additional contact information, please visit our web site at www.sbs.com



Specifications subject to change without notice. All trademarks and logos are property of their respective owners.
©2003 SBS Technologies, Inc. ABQ20050711



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com