



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com

Vaisala CARBOCAP® Carbon Dioxide Transmitter GMT221 in Refrigeration Applications

The leakage of odorless and colorless CO₂ refrigerant cannot be detected without proper sensors. In the event of refrigerant leakage, CO₂ concentration can reach dangerously high levels in poorly ventilated spaces.

This document describes the performance of the Vaisala CARBOCAP® Carbon Dioxide Transmitter GMT221 performance in refrigerated environments below -20°C (-4°F). The GMT221 is designed for harsh and humid environments. The housing of the transmitter is watertight (IP65/NEMA4) and the materials have been chosen accordingly, keeping in mind especially the corrosion resistance of the transmitter probe and body.

Summary of the Cold Duration Tests for the GMT221

The normal operating temperature range for the GMT221 is specified from -20°C to +60°C. In the described tests the transmitter was tested at temperatures down to -40°C. The long-term stability of the transmitter was tested both at a constant temperature in -40°C and with a rapidly changing temperature ranging from -40°C to +70°C. In addition, the temperature dependency of the transmitter was modelled down to -30°C. The performed tests indicate that the transmitter can be used at temperatures below -20°C, even as low as down to -40°C. However, it's good to remember that the ABS plastic material used in the transmitter housing becomes fragile in cold conditions. Therefore special attention should be paid to gentle handling of the unit.

Temperature Dependency of the CO₂ Reading

The GMT221 is calibrated at the factory in the environmental conditions of 25°C and 1013 hPa. Since all gases are compressible, the CO₂ reading needs to be compensated in case the measurement environment largely deviates from these conditions.

Table 1 presents the temperature dependency of the GMT221 at 0.5% CO₂. Approximate error without internal compensation (ambient temperature MF_TEMP in factory setting at 25°C) and with internal compensation applied (ambient temperature set to desired temperature X) is shown.

Ambient temperature	Error with factory default MF_TEMP 25	Error with user set value MF_TEMP X
25°C	negligible	negligible
-20°C	+10% of reading	very small
-30°C	+17% of reading	+9% of reading

Table 1: The temperature dependency expressed as typical error in the CO₂ reading with and without internal compensations (at 0.5% CO₂).

Correcting the CO₂ Reading for Temperature Dependency

To achieve the most accurate CO₂ measurement, the internal compensation function of the transmitter should be used. The internal temperature compensation function of the GMT221 is valid down to -20°C. Please refer to the GMT220 Series User's Guide to learn how to perform the internal temperature and pressure compensations (available at www.vaisala.com).

CO₂ transmitters are often located in temperatures below -20°C in refrigeration applications. The CO₂ reading of the GMT221 can be corrected for temperatures below -20°C using supplementary compensation formulas as presented below.

Figure 1 illustrates the temperature correction formulas of the GMT221 at temperatures below -20°C with internal compensation (MF_TEMP set to the prevailing ambient temperature) and without internal compensation (MF_TEMP set to 25°C).

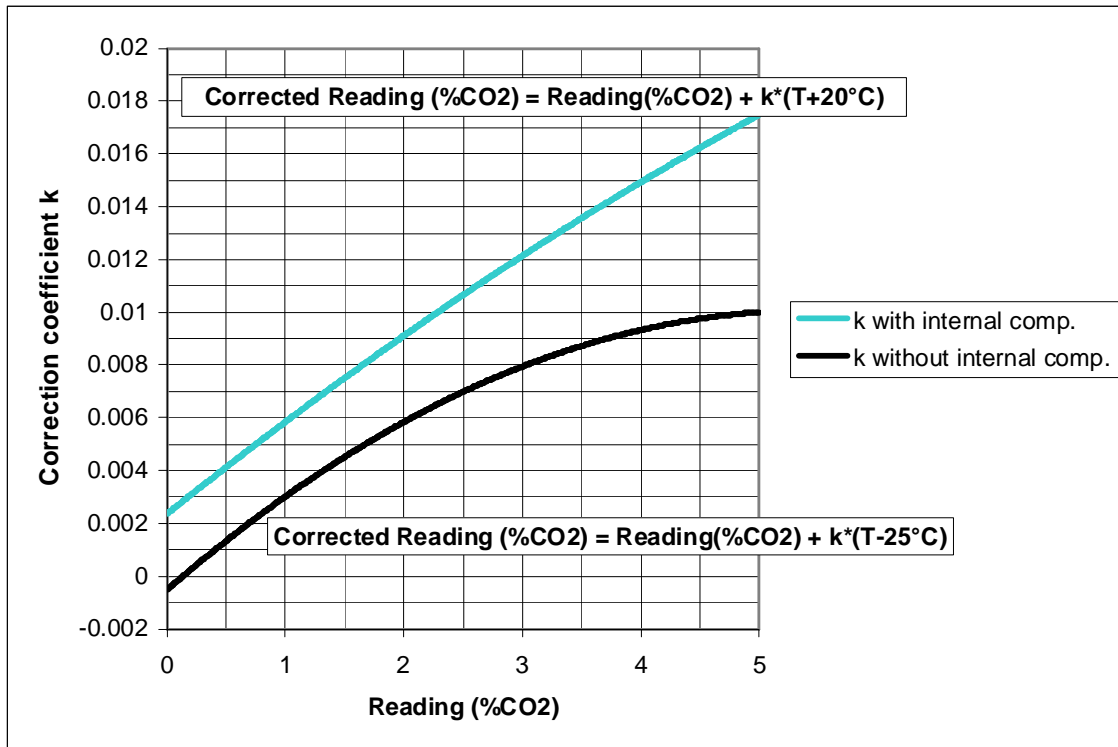


Figure 1: The temperature correction formulas for the GMT221 at temperature T (°C) below -20°C.

The correction coefficient can be approximated from Figure 1 according to the measured reading of the GMT221 transmitter. The upper curve represents the correction coefficient for CO₂ readings with applied internal compensation and the lower curve can be used to estimate the correction coefficient for CO₂ readings without internal compensation. Compensated CO₂ reading can be calculated from the following formulas:

1) With applied internal compensation:

$$\text{Corrected CO}_2 \text{ reading (\% CO}_2\text{)} = \text{Reading (\% CO}_2\text{)} + k \cdot (T + 20^\circ\text{C})$$

2) Without internal compensation:

$$\text{Corrected CO}_2 \text{ reading (\% CO}_2\text{)} = \text{Reading (\% CO}_2\text{)} + k \cdot (T - 25^\circ\text{C})$$

Explanations of the symbols used in the formulas:

Reading (% CO₂) = the CO₂ reading given by the transmitter (note: 10 000 ppm CO₂ = 1% CO₂),

k = the correction coefficient approximated from Figure 1

T = the prevailing ambient temperature in the measurement environment

Learn more at www.vaisala.com/GMT220



Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

*InstraView*SM REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at www.instraview.com ↗

WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. www.artisanng.com/WeBuyEquipment ↗

LOOKING FOR MORE INFORMATION?

Visit us on the web at www.artisanng.com ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

Contact us: (888) 88-SOURCE | sales@artisanng.com | www.artisanng.com