

# 4103C 4103M

## MODELS

- **Up to 6 Universal Input Channels**
- **High Visibility Display**
- **Annotation**
- **Data Archiving to PCMCIA Card**
- **Powerful Maths Pack**
- **RS232/RS485 Communications**




## 100mm Recorders Specification Sheet

The 4103 is high specification, 100mm strip chart recorder providing continuous recording for up to 6 Process Variables. Information such as Channel descriptor, alarm setpoint and scale information can be viewed on a high resolution VFD (4103) display. Process variables including messages can be archived to an optional removable media. These units can be programmed on site via the user interface or a configuration file can be transferred using a PCMCIA card.

### Display

As well as displaying the process variables as a numeric value the 4103 provides bargraph indication. The display will cycle through PV's configured to appear in the Display group. Additional information including the channel descriptor, scale information and alarm set points can be viewed using the operator key.

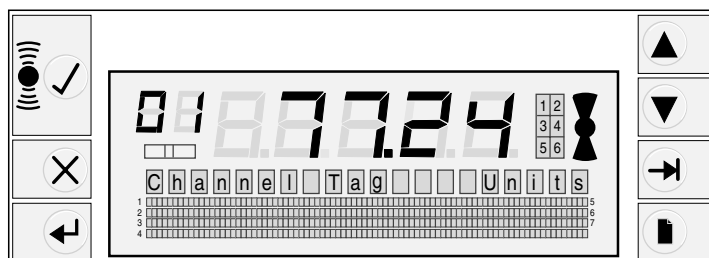

### Configuration

In order to prevent unauthorised access the configuration is password protected. Entry of the password provides access to the instrument configuration pages. It is possible to provide the operator access to certain parameters, for example you may require the operator to be able to change the chart speed or archiving interval. These fields can be enabled in the operator access menu.


## Operation

### Adaptive recording - multi-point version


At slow chart speeds it is possible that the input circuit, between chart increments will pick up a spike or other brief disturbance in the measured signal, but that this disturbance will not appear on the chart, even though they may trigger an alarm. With adaptive recording enabled, if a sudden change in the input signal is detected, the recorder will place an additional dot on the chart without the chart being moved. This means that even at the lowest chart speed, unexpected signal changes can still be traced.

### Pen offset compensation - continuous pen version

For continuous trace recorders the traces are separated in the time axis of the chart by 2mm, this results in simultaneous events being separated on the chart by 2mm. When enabled on the 4103C, Pen offset compensation applies a delay to the pens, the time delay being determined by the selected chart speed, such that simultaneous events appear on the same time axis.

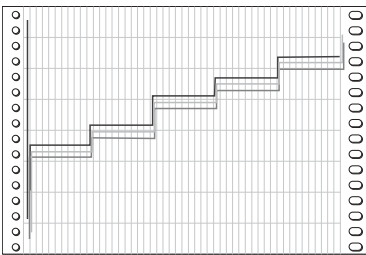


Compensation Off

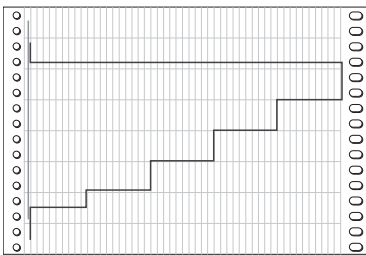

Compensation On

### Modular design - All

The modular design of the 4100 Series allows for upgrades to be carried out in situ thus reducing downtime.

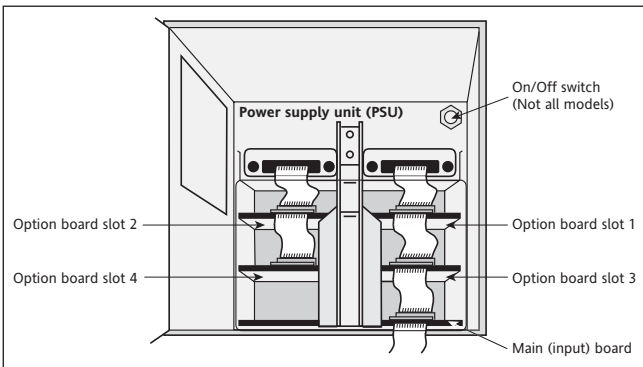

Exploded view

### Data archiving

Two log groups are available for sending tabular data to the chart or PCMCIA card. Either log groups can be initiated to print on the chart. Log group 2 can also be archived to a PC Card automatically at predetermined intervals. Data can be archived as either ASCII for use in spreadsheet, or Packed for viewing using Eurotherm Review software.

### Maths Pack

The addition of the advanced maths pack option provides the 4103 with 16 derived channels and the ability to carry out complex calculations such as relative humidity and mass flow. Derived channels can be added to the log and display groups for trending and archiving as required.

## Communications

Supporting either RS232 or RS485 the Serial Communications board provides the means of establishing a link between a recorder and a host computer (using the Gould Modicon Modbus protocol), terminal emulator or Modem.

### Analogue Output

If required, an input signal or the resulting calculation from a maths channel, can be retransmitted via an analogue output, to another device. Up to four analogue outputs can be fitted, each capable of generating a voltage or current output.

### Events

As standard, there are six internal events, each can be triggered by up to two selected input sources. The number of events rises to 16 when the Event Input board is fitted. Input sources can be logically ANDed or ORed allowing the use of multiple inputs. An example of the event input would be to provide external chart or logging control.


### Custom Curve

This option allows the user to enter a Non standard linearisation table. The curve is entered as pairs of points (input (X), display (Y)), up to a maximum of 32 pairs.

### Review Package

Offline printing and viewing is made possible by the use of the Review Software package.

This package uses the packed data files from the recorders local storage media and imports them into a PC database. Data from one or more archive files can easily be viewed. This data can then be printed or exported as a CSV file. Review can also be configured to automatically Backup and Transfer the archived files via a modem.

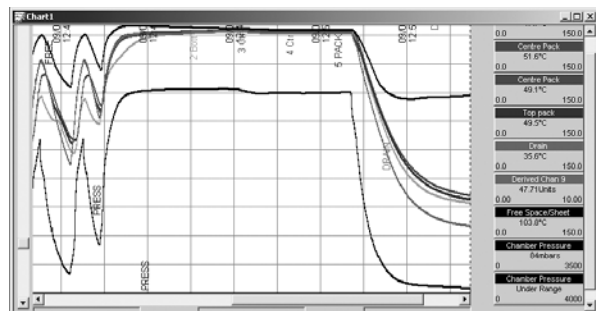

Batch Name	Start Time	End Time
Pressure	07/11/06 11:34:10	07/11/06 12:28:30
Pressure	07/11/06 14:21:20	07/11/06 15:11:20
Pressure	15/11/06 10:05:30	15/11/06 11:17:30
Pressure	25/11/06 12:18:00	25/11/06 12:47:50
Pressure	25/11/06 15:13:10	25/11/06 16:20:50

### Configuration Editor

An offline configuration package that allows a recorder configuration to be set up on a PC and transferred either by the 3.5mm jack plug or if fitted the Communications board. Alternatively a configuration file can be transferred using a PC card.



## TECHNICAL SPECIFICATION

### Input Board

#### General

Input types:	dc Volts, dc millivolts, dc milliamps (with shunt), Thermocouple, 2 / 3-wire RTD Contact closure (not ch 1) >60ms
Input type mix:	User configurable
Max no of inputs:	4103C 4 4103M 6
Input ranges:	-8 to +38mV -30 to +150mV -0.2 to +1 Volt -2 to +10 Volts -20 to +100 Volts with attenuator
Termination :	Edge connector/terminal block
Noise rejection (48 to 62 Hz):	Common mode: >140dB (channel to channel and channel to ground). Series mode: >60dB
Maximum common mode voltage:	250 Volts continuous
Maximum series mode voltage:	45mV at lowest range; 12 Volts peak at highest range.
Isolation (dc to 65 Hz; EN61010):	Installation cat. II; Pollution deg. 2
Channel to channel:	300V RMS or dc (double insulation)
Channel to common electronics:	300V RMS or dc (double insulation)
Channel to ground:	300V RMS or dc (basic insulation)
Dielectric strength (BS EN61010):	(1 minute type tests.)
Channel to channel:	2300V ac
Channel to ground:	1350V ac
Insulation resistance:	>10MΩ at 500V dc
Input impedance:	38mV, 150mV and 1V ranges: >10MΩ; 10V range: 68.8kΩ
Over voltage protection:	50 Volts peak (150V with attenuator)
Open circuit detection:	±57nA max.
Recognition time:	250msec
Minimum break resistance:	10MΩ

#### DC Input ranges

Shunt/attenuator:	Externally mounted resistor modules
Additional error due to shunt:	0.1% of input
Additional error due to attenuator:	0.2% of input
Performance:	See table 1

Low Range	High Range	Resolution	Maximum error (Instrument at 20°C)	Worst case temperature performance
-8mV	38mV	1.4µV	0.085% input + 0.073% range	80ppm of input per °C
-30mV	150mV	5.5µV	0.084% input + 0.053% range	80ppm of input per °C
-0.2V	1V	37µV	0.084% input + 0.037% range	80ppm of input per °C
-2V	10V	370µV	0.275% input + 0.040% range	272ppm of input per °C

Table 1 DC performance

#### Thermocouple data

Temperature scale:	ITS 90
Bias current:	0.05nA
Cold junction types:	Off, internal, external, remote
CJ error:	1°C; instrument at 25°C
CJ rejection ratio:	50:1 minimum
Remote CJ:	Via any user-defined channel
Upscale/downscale drive:	High, low or none selectable for each thermocouple channel
Types and ranges:	See table 2

T/C Type	Overall range (°C)	Standard	Max linearisation error
B	0 to +1820	IEC 584.1	0 to 400°C: 1.7°C 400 to 1820°C: 0.03°C
C	0 to +2300	Hoskins	0.12°C
D	0 to +2495	Hoskins	0.08°C
E	-270 to +1000	IEC 584.1	0.03°C
G2	0 to +2315	Hoskins	0.07°C
J	-210 to +1200	IEC 584.1	0.02°C
K	-270 to +1372	IEC 584.1	0.04°C
L	-200 to +900	DIN43700:1985 (To IPTS68)	0.20°C
N	-270 to +1300	IEC 584.1	0.04°C
R	-50 to +1768	IEC 584.1	0.04°C
S	-50 to +1768	IEC 584.1	0.04°C
T	-270 to +400	IEC 584.1	0.02°C
U	-200 to +600	DIN43700:198	0.08°C
Ni/NiMo	0 to +1406	Ipsen	0.14°C
Platinel	0 to +1370	Englehard	0.02°C

Table 2 Thermocouple types and ranges

#### Resistance inputs

Ranges (including lead resistance):	0 to 150Ω, 0 to 600Ω, 0 to 6kΩ
Influence of lead resistance:	Error: negligible; Mismatch: 1Ω/Ω
Temperature scale:	ITS90
Resolution and performance:	See Table 3
RTD types and ranges:	See Table 4

Low Range	High Range	Resolution	Maximum error (Instrument at 20°C)	Worst case temperature performance
0Ω	150Ω	5mΩ	0.045% input + 0.110% range	35ppm of input per °C
0Ω	600Ω	22mΩ	0.045% input + 0.065% range	35ppm of input per °C
0Ω	6000Ω	148mΩ	0.049% input + 0.035% range	35ppm of input per °C

Table 3 Resolution and performance for resistance inputs

RTD type	Overall range (°C)	Standard	Max linearisation error
Cu10	-20 to +400	General Electric Co	0.02°C
JPT100	-220 to +630	JIS C 1604:1989	0.01°C
Ni1000	-60 to +250	DIN43760:1987	0.01°C
Ni120	-50 to +170	DIN43760:1987	0.01°C
Pt100	-200 to +850	IEC 751	0.01°C
Pt100A	-200 to +600	Eurotherm Recorders SA	0.09°C
Pt1000	-200 to +850	IEC 751	0.01°C

Table 4 RTD types and ranges

#### INSTALLATION CATEGORY II

The rate impulse voltage for equipment on nominal 230V mains is 2500V.

#### POLLUTION DEGREE 2

Normally, only non-conductive pollution occurs. Occasionally, however, a temporary conductivity caused by condensation shall be expected

### Recorder

#### Board types

Standard:	Universal input / control board
Options:	3- Change-over relay output board 4 Normally open relay O/P board 4 Normally closed relay O/P board Analogue output board (2 channel) Event input board Communications board Transmitter power supply

#### Environmental Performance

Temperature limits:	Operation: 0 to 50°C Storage: -20 to + 70°C
Humidity limits:	Operation: 5% to 80% RH
(non-condensing):	Storage: 5% to 90% RH
Protection:	Door and Bezel: IP54 Sleeve: IP20 Transmitter PSU cover: IP10
Shock:	BS EN61010
Vibration:	2g peak at 10 Hz to 150Hz
Altitude (max.):	2000 metres

#### Power requirements

Line voltage:	Standard: 90 to 264V at 45 to 65 Hz
Enhanced interrupt protection:	90 to 132V at 45 to 65 Hz
Low voltage:	20 to 54V dc or 20 to 35V ac (45 to 400 Hz)
Power (Max):	100 VA
Fuse type:	Not user accessible
Interrupt protection:	Standard: 40ms at 75% max. instrument load Enhanced: 120ms at 75% max. instrument load

#### Electromagnetic compatibility (EMC)

Emissions:	BS EN50081-2
Immunity:	BS EN50082-2
Electrical safety:	To EN61010: Installation category II; Pollution degree 2

#### Physical

Panel mounting:	DIN43700
Bezel size:	144 x 144 mm.
Panel cutout dimensions:	138 x 138 (both - 0 + 1 mm)
Depth behind bezel rear face:	220 mm (No terminal cover); 236 mm (standard terminal cover) 275 mm (long terminal cover closed) 390mm (long terminal cover open)
Weight:	< 3.5kg
Panel mounting:	Vertical ±30°C

## TECHNICAL SPECIFICATION (continued)

### Recorder (continued)

#### Printing System 4103C

Pen type:	Disposable fibre-tipped pens
Pen resolution:	0.15 mm
Trace colours:	See Table 5
Pen life:	1.2km (channel); 7.5 x 10 <sup>5</sup> dots (annotator)
Update rate:	8 Hz
Response time (max):	1 second
Characters per line:	42

Channel	1 (top)	2	3	4 (bottom)	Annotator
Colour	blue	red	green	violet	black

Table 5 4103C Trace colours

#### Printing System 4103M

Pen type:	Six nib cartridge
Pen resolution:	0.2 mm
Trace colours:	See Table 6
Pen life:	1.5 x 10 <sup>6</sup> dots per colour
Update rate:	2 Hz
Response time (max):	1 pass every 1.5 seconds
Characters per line:	42

Channel	1	2	3	4	5	6
Colour	violet	red	black	green	blue	brown

Table 6 4103M Trace colours

### Paper transport

Type:		Stepper motor driving sprocket tube
Chart speeds:	4103C	0 to 36,000 mm/hr; 0 to 1417 in/hr
	4103M	0 to 1200 mm/hr; 0 to 47 in/hr
Chart type:	Standard	16 metre z-fold
	Option	32 metre roll

### Options

All isolation figures are Installation category II and Pollution degree 2

#### Modbus (RS232/RS422/RS485) Communications

Isolation:	Terminal to ground:	100V RMS/dc (basic insulation)
Protocol:		Gould Modicon Modbus RTU

#### Transmitter Power Supply

Output voltage:	3 or 6 x 25V dc (nom) outputs	
Isolation (dc to 65Hz; BS EN61010):		
	Channel to channel:	100V RMS or dc (double insulation)
	Channel to ground:	100V RMS or dc (basic insulation)

#### Maths pack

Number of derived channels:	16 (24, 4100G)		
Level 1 functions			
Off	Subtract	Modulus	Constant
Multiply	Add	Divide	

#### Level2 functions (additional to level 1)

Square root	Rate of change	Third order polynomial	Low select
Channel average	Sample and hold	Relative humidity	Stopwatch
DV group average	Channel min	F value	Time stamp
Rolling average	DV group latching min	Linear mass flow	O <sub>2</sub> correction
e <sup>x</sup>	DV group continuous min	Square root mass flow	Time stamp
log <sub>10</sub>	Channel max	Zirconia probe	Percentile
10 <sup>x</sup>	DV group latching max	Switch	
Log <sub>10</sub>	DV group continuous max	High select	

#### Event inputs

Number of inputs:	6 discrete or 16 binary coded inputs + chart synch
Isolation:	Event input to ground: 100V RMS or dc (double insulation)
	Chart drive to ground: 100V RMS or dc (double insulation)
	Event input to chart drive: 100V RMS or dc (double insulation)
	Event input to Event input: 0V
Recognition levels:	Low: -30V to +0.8V
	High: 2 to 30V
Maximum frequency:	Events: 1Hz
	Pulse counting: 6Hz
Minimum pulse width:	6.25ms
Chart synchronization:	Chart speed: Selected speed at 200 pulses/sec
	Maximum pulse rate: 220 pulses per second
	Duty cycle: 20 to 80%

#### Customer linearisation


Number of tables available:	One
Number of point pairs:	32

### Relay outputs


Maximum switching power:	500VA
Maximum breaking current:	2 Amps within above power ratings
Maximum contact voltage:	250V within above power ratings
Maximum dc ratings:	See Graph 2
Isolation (dc to 65Hz; BS EN61010):	
	Contact-contact: 300V RMS or dc (double insulation)
	Contact to ground: 300V RMS or dc (basic insulation)
Estimated life*	30,000,000 operations

\* With resistive loads. With inductive loads, derate according to Graph 1, in which:

Contact life = resistive life x F1 or F2 where  
F1 = measured on representative examples and  
F2 = typical values according to experience



Graph 1 Derating curves



Graph 2 DC ratings

### Analogue (transmission) outputs

Output ranges (user configurable):	Voltage: 0 to 10V (source 5mA max)
	Current: 0 to 20mA (max load resistance: 1kΩ)
Update rate	2Hz
Step response (10% to 90%):	250msec
Linearity:	0.024% of hardware range
Performance:	See Table 7
Isolation:	Channel to channel: 300V RMS or dc (double insulation)
	Channel to ground: 300V RMS or dc (basic insulation)


Performance in instrument at 20°C		
Range	Accuracy	Temperature Drift
0 to 10V	0.1% of range	±0.12mV +0.022% of reading per °C
0 to 10V	0.1% of range	±0.1µA +0.03% of reading per °C

Table 7 Analogue output performance


### 4103C, 4100G Seismic

Tested to IEE344 – 1987 'IEEE recommended practice for Seismic qualification of class 1E equipment for Nuclear Power Generating Stations'



### Mechanical installation

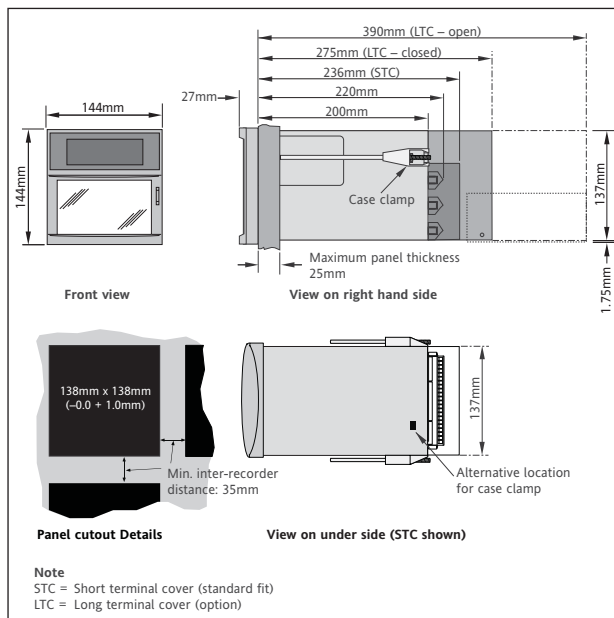



## Input board signal wiring

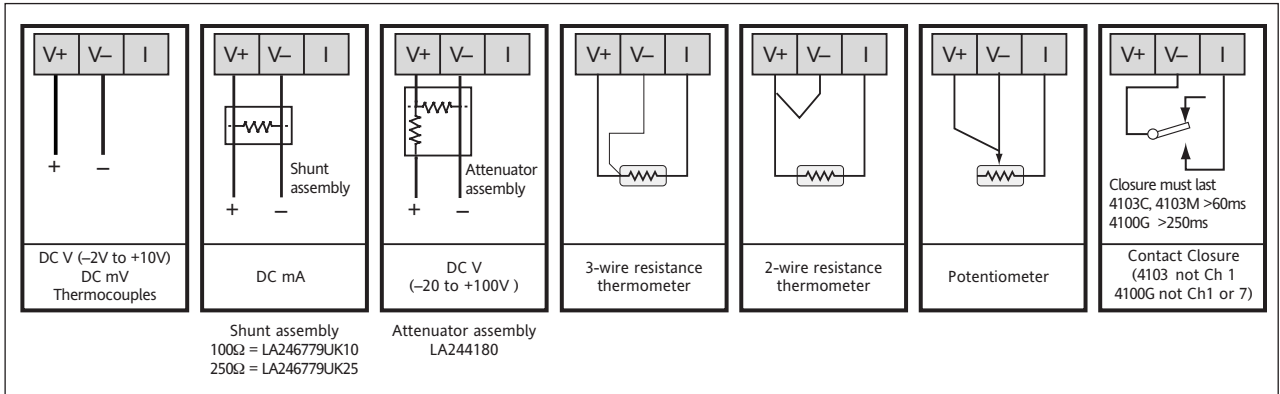

## Supply voltage and input board termination

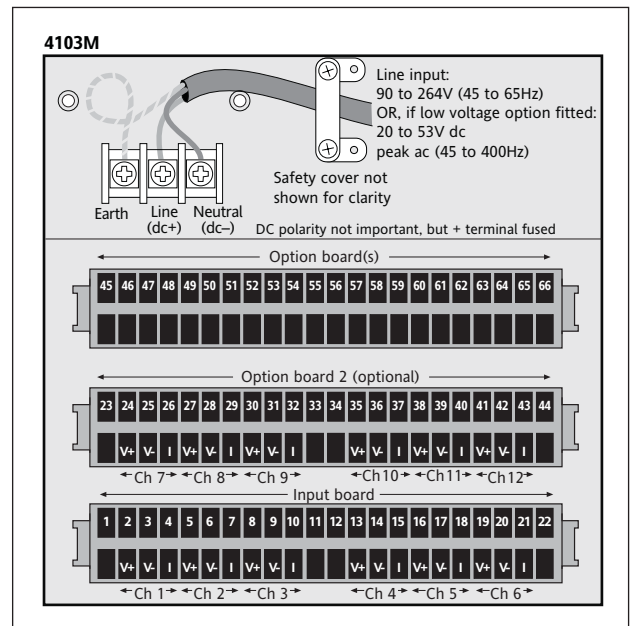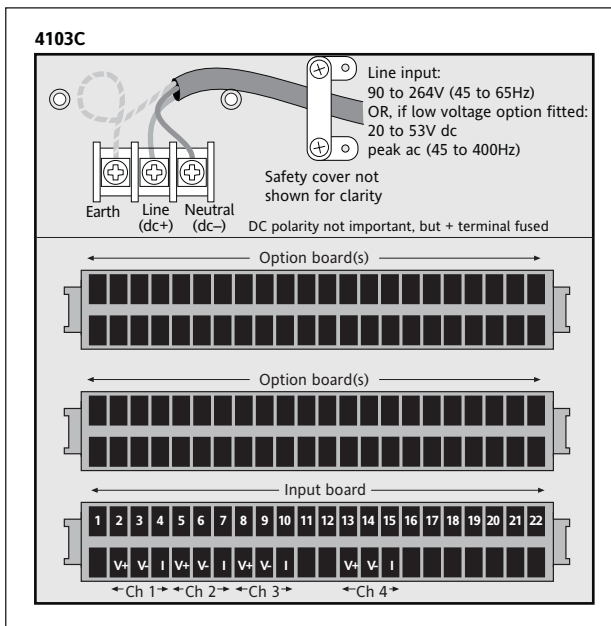

## Option wiring

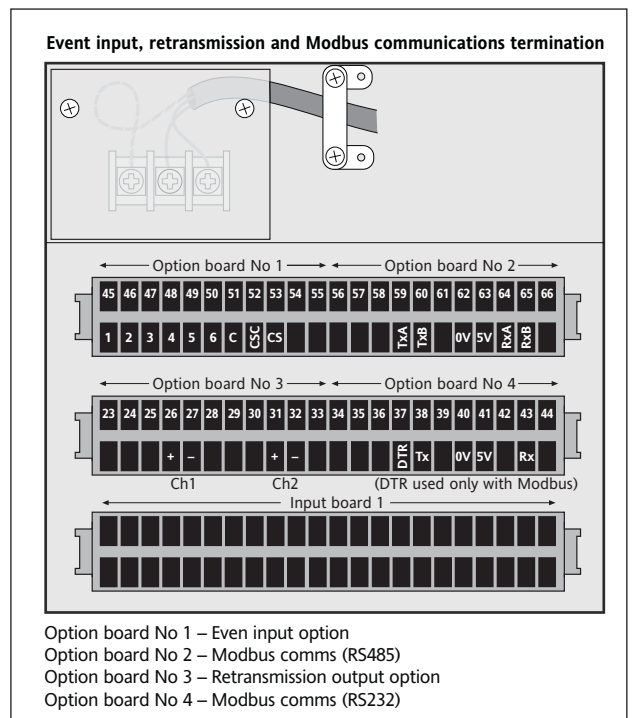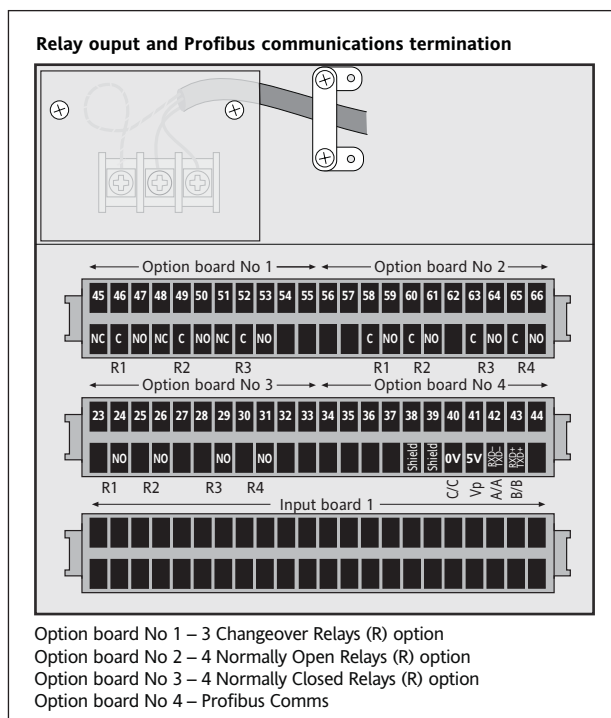

---

## Eurotherm: International sales and service

Understanding and providing local support is a key part of Eurotherm's business. Complementing worldwide Eurotherm offices are a whole range of partners and a comprehensive technical support team... to ensure you get a service you will want to go back to.

**AUSTRALIA** *Sydney*  
Eurotherm Pty. Ltd.  
T (+61 2) 9838 0099  
F (+61 2) 9838 9288  
E [info.au@eurotherm.com](mailto:info.au@eurotherm.com)

**AUSTRIA** *Vienna*  
Eurotherm GmbH  
T (+43 1) 7987601  
F (+43 1) 7987605  
E [info.at@eurotherm.com](mailto:info.at@eurotherm.com)

**BELGIUM & LUXEMBOURG** *Moha*  
Eurotherm S.A./N.V.  
T (+32) 85 274080  
F (+32) 85 274081  
E [info.be@eurotherm.com](mailto:info.be@eurotherm.com)

**BRAZIL** *Campinas-SP*  
Eurotherm Ltda.  
T (+5519) 3707 5333  
F (+5519) 3707 5345  
E [info.br@eurotherm.com](mailto:info.br@eurotherm.com)

**DENMARK** *Copenhagen*  
Eurotherm Danmark AS  
T (+45 70) 234670  
F (+45 70) 234660  
E [info.dk@eurotherm.com](mailto:info.dk@eurotherm.com)

**FINLAND** *Abo*  
Eurotherm Finland  
T (+358) 22506030  
F (+358) 22503201  
E [info.fi@eurotherm.com](mailto:info.fi@eurotherm.com)

**FRANCE** *Lyon*  
Eurotherm Automation SA  
T (+33 478) 664500  
F (+33 478) 352490  
E [info.fr@eurotherm.com](mailto:info.fr@eurotherm.com)

**GERMANY** *Limburg*  
Eurotherm Deutschland GmbH  
T (+49 6431) 2980  
F (+49 6431) 298119  
E [info.de@eurotherm.com](mailto:info.de@eurotherm.com)

**HONG KONG & CHINA**  
Eurotherm Limited *North Point*  
T (+85 2) 28733826  
F (+85 2) 28700148  
E [info.hk@eurotherm.com](mailto:info.hk@eurotherm.com)

*Guangzhou Office*  
T (+86 20) 8755 5099  
F (+86 20) 8755 5831  
E [info.cn@eurotherm.com](mailto:info.cn@eurotherm.com)

*Beijing Office*  
T (+86 10) 6567 8506  
F (+86 10) 6567 8509  
E [info.cn@eurotherm.com](mailto:info.cn@eurotherm.com)

*Shanghai Office*  
T (+86 21) 6145 1188  
F (+86 21) 6145 1187  
E [info.cn@eurotherm.com](mailto:info.cn@eurotherm.com)

**INDIA** *Chennai*  
Eurotherm India Limited  
T (+91 44) 24961129  
F (+91 44) 24961831  
E [info.in@eurotherm.com](mailto:info.in@eurotherm.com)

**IRELAND** *Dublin*  
Eurotherm Ireland Limited  
T (+353 1) 4691800  
F (+353 1) 4691300  
E [info.ie@eurotherm.com](mailto:info.ie@eurotherm.com)

**ITALY** *Como*  
Eurotherm S.r.l.  
T (+39 31) 975111  
F (+39 31) 977512  
E [info.it@eurotherm.com](mailto:info.it@eurotherm.com)

**KOREA** *Seoul*  
Eurotherm Korea Limited  
T (+82 31) 2738507  
F (+82 31) 2738508  
E [info.kr@eurotherm.com](mailto:info.kr@eurotherm.com)

**NETHERLANDS** *Alphen a/d Rijn*  
Eurotherm B.V.  
T (+31 172) 411752  
F (+31 172) 417260  
E [info.nl@eurotherm.com](mailto:info.nl@eurotherm.com)

**NORWAY** *Oslo*  
Eurotherm A/S  
T (+47 67) 592170  
F (+47 67) 118301  
E [info.no@eurotherm.com](mailto:info.no@eurotherm.com)

**POLAND** *Katowice*  
Invensys Eurotherm Sp z o.o.  
T (+48 32) 2185100  
F (+48 32) 2177171  
E [info.pl@eurotherm.com](mailto:info.pl@eurotherm.com)

**SPAIN** *Madrid*  
Eurotherm España SA  
T (+34 91) 6616001  
F (+34 91) 6619093  
E [info.es@eurotherm.com](mailto:info.es@eurotherm.com)

**SWEDEN** *Malmö*  
Eurotherm AB  
T (+46 40) 384500  
F (+46 40) 384545  
E [info.se@eurotherm.com](mailto:info.se@eurotherm.com)

**SWITZERLAND** *Wollerau*  
Eurotherm Produkte (Schweiz) AG  
T (+41 44) 7871040  
F (+41 44) 7871044  
E [info.ch@eurotherm.com](mailto:info.ch@eurotherm.com)

**UNITED KINGDOM** *Worthing*  
Eurotherm Limited  
T (+44 1903) 268500  
F (+44 1903) 265982  
E [info.uk@eurotherm.com](mailto:info.uk@eurotherm.com)  
[www.eurotherm.co.uk](http://www.eurotherm.co.uk)

**U.S.A.** *Leesburg VA*  
Eurotherm Inc.  
T (+1 703) 443 0000  
F (+1 703) 669 1300  
E [info.us@eurotherm.com](mailto:info.us@eurotherm.com)  
[www.eurotherm.com](http://www.eurotherm.com)

ED53

---

© Copyright Eurotherm Limited 2006

Invensys, Eurotherm, the Eurotherm logo, Chessell, EurothermSuite, Mini8, Eycon, Eyris and Wonderware are trademarks of Invensys plc, its subsidiaries and affiliates. All other brands may be trademarks of their respective owners. All rights are strictly reserved. No part of this document may be reproduced, modified, or transmitted in any form by any means, nor may it be stored in a retrieval system other than for the purpose to act as an aid in operating the equipment to which the document relates, without the prior written permission of Eurotherm limited.

Eurotherm Limited pursues a policy of continuous development and product improvement. The specifications in this document may therefore be changed without notice. The information in this document is given in good faith, but is intended for guidance only. Eurotherm Limited will accept no responsibility for any losses arising from errors in this document.