



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗


### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)

## cPCI-6760D series

Fully Integrated Dual Bridge 6U CompactPCI Single Slot Low Power Pentium-III System Host CPU Module

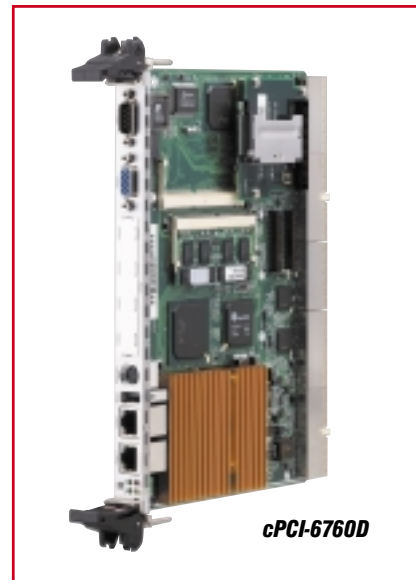

... Highly integration design makes cPCI-6760D provides fully functionality within only single slot space. User can access plenty I/Os with Dual Ethernet ports and one PMC expansion slot on the front panel. The cPCI-R6760S superior rear I/O transition module (RTM) extends the functionality with Ultra-160 SCSI and quad-LAN, makes it as the single slot system host with maximum I/O connectivity.

### Features

- PICMG 2.7 CompactPCI Dual System Slot Compliant
- Standard 6U form factor, 1-slot (4HP) wide
- Design for low power Pentium-III CPU running at FSB 100MHz
- Two 144-pin SO-DIMM sockets support up to 512MB SDRAM with optional ECC support
- Build-in housing for 2.5" low profile HDD
- Supports 14 bus-master PCI devices on CompactPCI bus by PICMG 2.7 architecture
- On-board one single size 32-bit PMC module slot
- Up to four 10/100Mb Ethernet ports with cPCI-R6760S
- External Ultra-160 SCSI interface with cPCI-R6760S
- Supports CompactFlash type-II socket via removable daughter board
- Supports self-hot-swap operation by soft triggering system power off
- WDT status indication
- Self-hot-swap status indication

### Specifications

CompactPCI Standards	PICMG 2.0 R3.0; PICMG 2.1 Hot Swap R2.0; PICMG 2.7 Dual System Slot R1.0	Front Panel I/Os	COM1 (RS-232), PS2 KB+MS (combo), USB, LAN1, LAN2, VGA, PMC
Form Factor	6U cPCI (233.33x160mm), 1 slots (4HP) wide	Backplane (rear) I/O	J3: COM1, LPT, KB, MS, FDD, IDE1, LAN1, LAN2, Buzzer; J4/J5: cPCI Bus B (PICMG 2.7); J5: COM2, IDE2, USB, VGA
CPU/Cache	Intel BGA2 mobile Pentium-III up to 850MHz with 256K on-die L2 cache	Rear I/O Module Options	cPCI-R6760D; cPCI-R6760S
Front Side Bus Speed	100MHz	Watchdog Timer	1~255 sec or 1~255 min software programmable, can generate system reset
Chipset	440BX	Other Features	Intel PXE pre-boot on Ethernet Remote Console On-board LAN, H/W Monitor disable
BIOS	Award 2Mb flash memory	Operating Temp.	0 to 55°C (inside-chassis temp, CPU type dependant; external air-flow required)
RAM	Two 144-pin SO-DIMM sockets, up to 512MB SDRAM with optional on-board ECC support	Storage Temp.	-20 to 80°C
cPCI Bus Interface	32-bit/33MHz, support 14 bus-mastering devices, Dual TI PCI2050 PCI to PCI bridge	Shock	15G peak-to-peak, 11ms duration, non-operation
VGA	SMI-721 AGP-2X VGA with 4MB VRAM	Vibration	Non-operation: 1.88Grms, 5-500Hz, each axis Operation: 0.5Grms, 5-500Hz, each axis, with 2.5" HDD
LAN	10/100Mbps Ethernet by Intel 82559; dual ports on front board and additional dual ports on cPCI-R6760S rear board	Measured Power Consumption	Low Power P-III-700 & 256MB RAM: 3.8A @ +5V; 4.5A @ +3.3V; 228mA @ +12V (w/o HDD) Mobile P-III-850 & 512MB RAM with cPCI-R6760S: 6.4A @ +5V; 4.5A @ +3.3V; 228mA @ +12V (w/o HDD)
IDE	UDMA-33, dual channels; built-in 2.5" ATA HDD housing on front board	Certificate or Test	CE; FCC class B; HALT
Floppy	Standard 34-pin connector on RTM		
Flash Disk	Flash2000 2.5" flash drive or CF Card by removable adaptor		
USB	USB 1.1, 2 ports (1 for front, 1 for rear)		
SCSI	LSI 53C1000R; External Ultra-160 SCSI with LVD (cPCI-R6760S)		

### Rear I/O Transition Modules

Model number	Board Depth	Faceplate I/O	On-board I/O
cPCI-R6760D	80 mm	COM2 (RS-232/422/485), LPT, KB, MS, USB, VGA, LAN1, LAN2	COM1 (10-pin), FDD (34-pin), IDE1 & IDE2 (40-pin), Buzzer
cPCI-R6760S	80 mm	COM2 (RS-232/422/485), KB&MS, USB, LAN1~4, SCSI (external 68-pin)	COM1 & COM2 (10-pin), LPT (26-pin), FDD (34-pin), IDE1 & IDE2 (40-pin), Buzzer, VGA (15-pin)

### Ordering Information

Model number	Description/Configuration
cPCI-6760D/P7	6U cPCI Single Slot Low Power P-III-700 System Host CPU Module with VGA, Dual LAN, PMC Slot and DB-6760CF
cPCI-6760D/P8	6U cPCI Single Slot Low Power P-III-850 System Host CPU Module with VGA, Dual LAN, PMC Slot and DB-6760CF
cPCI-R6760D	Standard Rear I/O Transition Module for cPCI-6760D
cPCI-R6760S	Superior Rear I/O Transition Module for cPCI-6760D with Ultra-160 SCSI and Additional Dual LAN
DB-6760CF	Removable CompactFlash Type-II Socket Adaptor for cPCI-6760D

Note 1: Front CPU modules and rear I/O transition modules are sold separately  
Note 2: CPU is soldered, RAM or HDD are not included



## Artisan Technology Group is your source for quality new and certified-used/pre-owned equipment

- FAST SHIPPING AND DELIVERY
- TENS OF THOUSANDS OF IN-STOCK ITEMS
- EQUIPMENT DEMOS
- HUNDREDS OF MANUFACTURERS SUPPORTED
- LEASING/MONTHLY RENTALS
- ITAR CERTIFIED SECURE ASSET SOLUTIONS

### SERVICE CENTER REPAIRS

Experienced engineers and technicians on staff at our full-service, in-house repair center

### *InstraView*<sup>SM</sup> REMOTE INSPECTION

Remotely inspect equipment before purchasing with our interactive website at [www.instraview.com](http://www.instraview.com) ↗

### WE BUY USED EQUIPMENT

Sell your excess, underutilized, and idle used equipment. We also offer credit for buy-backs and trade-ins. [www.artisanng.com/WeBuyEquipment](http://www.artisanng.com/WeBuyEquipment) ↗

### LOOKING FOR MORE INFORMATION?

Visit us on the web at [www.artisanng.com](http://www.artisanng.com) ↗ for more information on price quotations, drivers, technical specifications, manuals, and documentation

**Contact us:** (888) 88-SOURCE | [sales@artisanng.com](mailto:sales@artisanng.com) | [www.artisanng.com](http://www.artisanng.com)