

HP E1432-61602

## 8-Channel Voltage Breakout Box



**In Stock**

**New From Surplus Stock**

**Open Web Page**

<https://www.artisanng.com/52693-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

- Critical and expedited services
- In stock / Ready-to-ship



- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

# Agilent E1432A

## 4-16 Channel 51.2 kSa/s Digitizer plus DSP

### Technical Specifications

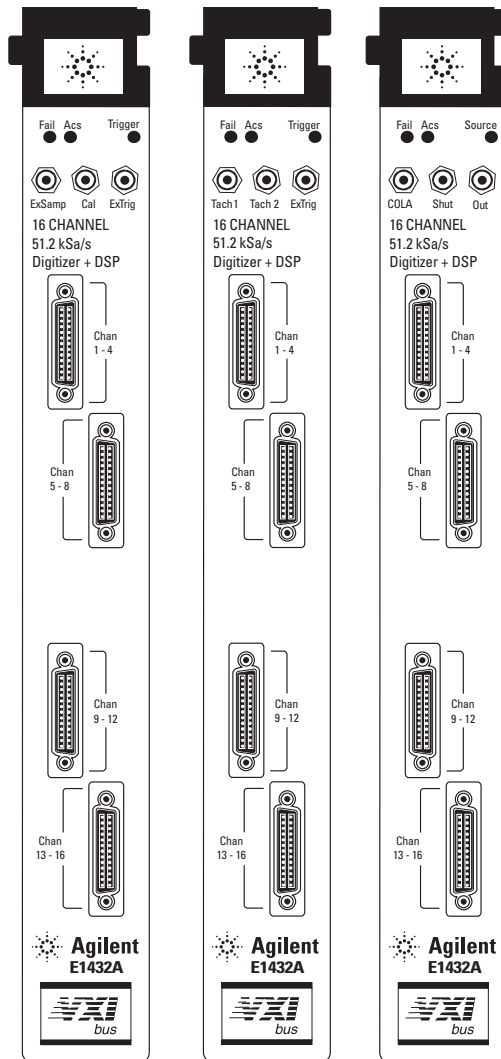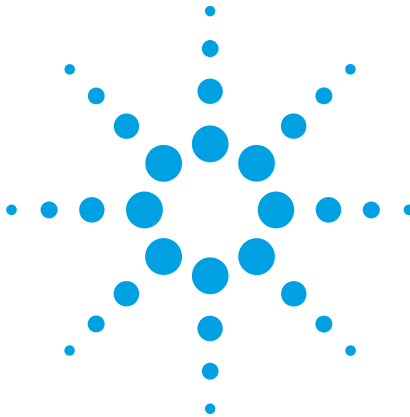

Agilent E1432A

Agilent E1432A  
with Tachometer  
Option AYF

Agilent E1432A  
with Arbitrary Source  
Option 1D4

The Agilent E1432A 16 Channel 51.2 kSa/s Digitizer plus DSP is a C-size VXI module. "51.2 kSa/s" refers to the maximum sample rate of 51,200 samples per second, per channel.

The E1432A may contain up to four 4-channel input assemblies so that the module may have a total of up to 16 inputs.

This module integrates transducer signal conditions, anti-alias protection, digitization and high speed measurement computation in a single slot VXI card. Onboard digital signal processing and up to 32 Mbytes of RAM maximizes total system performance and flexibility.



**Agilent Technologies**

Innovating the HP Way

## Specifications

### Frequency

| Bandwidth<br>(Hz) <sup>1</sup> | Sample Rate<br>(samples/second) | Bandwidth<br>(Hz) <sup>1</sup> | Sample Rate<br>(samples/second) |
|--------------------------------|---------------------------------|--------------------------------|---------------------------------|
| 23000 <sup>2</sup>             | 51200                           | 488.2813                       | 1250                            |
| 20000                          | 51200                           | 468.75                         | 1200                            |
| 19531.25                       | 50000                           | 400                            | 1024                            |
| 18750                          | 48000                           | 390.625                        | 1000                            |
| 16000                          | 40960                           | 320                            | 819.2                           |
| 15625                          | 40000                           | 312.5                          | 800                             |
| 12800                          | 32768                           | 305.1758                       | 781.25                          |
| 10000                          | 25600                           | 292.9688                       | 750                             |
| 9765.625                       | 25000                           | 250                            | 640                             |
| 9375                           | 24000                           | 244.1406                       | 625                             |
| 8000                           | 20480                           | 234.375                        | 600                             |
| 7812.5                         | 20000                           | 200                            | 512                             |
| 6400                           | 16384                           | 195.3125                       | 500                             |
| 5000                           | 12800                           | 160                            | 409.6                           |
| 4882.8125                      | 12500                           | 156.25                         | 400                             |
| 4687.5                         | 12000                           | 152.5879                       | 390.625                         |
| 4000                           | 10240                           | 146.4844                       | 375                             |
| 3906.25                        | 10000                           | 125                            | 320                             |
| 3750                           | 9600                            | 122.07031                      | 312.5                           |
| 3200                           | 8192                            | 117.1875                       | 300                             |
| 3125                           | 8000                            | 100                            | 256                             |
| 2560                           | 6553.6                          | 97.65625                       | 250                             |
| 2500                           | 6400                            | 80                             | ~ 204.8                         |
| 2441.4063                      | 6250                            | 78.125                         | 200                             |
| 2343.75                        | 6000                            | 76.293945                      | 195.3125                        |
| 2000                           | 5120                            | 73.242188                      | 187.5                           |
| 1953.125                       | 5000                            | 62.5                           | 160                             |
| 1875                           | 4800                            | 61.035156                      | 156.25                          |
| 1600                           | 4096                            | 58.59375                       | 150                             |
| 1562.5                         | 4000                            | 50                             | 128                             |
| 1280                           | 3276.8                          | 48.828125                      | 125                             |
| 1250                           | 3200                            | 40                             | 102.4                           |
| 1220.7031                      | 3125                            | 31.25                          | 80                              |
| 1171.875                       | 3000                            | 30.517578                      | 78.125                          |
| 1000                           | 2560                            | 29.296875                      | 75                              |
| 976.5625                       | 2500                            | 25                             | 64                              |
| 937.5                          | 2400                            | 24.414063                      | 62.5                            |
| 800                            | 2048                            | 20                             | 51.2                            |
| 781.25                         | 2000                            | 15.625                         | 40                              |
| 640                            | 1638.4                          | 15.258789                      | 39.0625                         |
| 625                            | 1600                            | 14.648438                      | 37.5                            |
| 610.3516                       | 1562.5                          | 12.5                           | 32                              |
| 585.9375                       | 1500                            | 12.207031                      | 31.25                           |
| 500                            | 1280                            | 10                             | 25.6                            |

### Frequency Accuracy

± 0.012% (120 ppm)

<sup>1</sup> Bandwidth is 400 lines of 512 line FFT spectrum unless noted otherwise.

<sup>2</sup> Bandwidth is 460 lines of 512 line FFT spectrum.

**Input**

|                                                                                                                         |                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| <b>Full Scale Input Ranges</b> (in volts peak)                                                                          | 100 mV, 200 mV, 500 mV, 1V, 2V, 5V, 10V, 20V <sup>3</sup><br>Add 23% to include over-range capability. |
| <b>Maximum Input Level</b>                                                                                              | 42 Vp                                                                                                  |
| <b>Input Impedance</b><br>(dc coupled or ac coupled above 10 Hz)                                                        |                                                                                                        |
| Differential                                                                                                            | 1 M $\Omega$ nominal                                                                                   |
| Either side-to-chassis                                                                                                  | 500 k $\Omega$ , 35 pF nominal                                                                         |
| <b>Input Resistance</b> (measured at dc while ac coupled)                                                               |                                                                                                        |
| Either side-to-chassis                                                                                                  | 350 k $\Omega$ nominal                                                                                 |
| <b>AC Coupling 3 dB Corner Frequency</b>                                                                                | < 1 Hz                                                                                                 |
| <b>Common Mode Rejection Ratio</b>                                                                                      |                                                                                                        |
| dc coupled, dc to 1 kHz                                                                                                 | > 50 dB                                                                                                |
| ac coupled, 40 Hz to 1 kHz                                                                                              | > 45 dB                                                                                                |
| Maximum signal, either side-to-chassis                                                                                  | $\pm 20$ Vpk                                                                                           |
| <b>Amplitude Over-Range Detection</b>                                                                                   |                                                                                                        |
| Over-range indication after:                                                                                            |                                                                                                        |
| Common mode overload                                                                                                    | $\pm 22.5$ V (typical)                                                                                 |
| Differential overload                                                                                                   | $\pm 130\%$ of range (typical)                                                                         |
| <b>Residual DC</b>                                                                                                      | $\pm 1\%$ of range, $\pm 10$ mV                                                                        |
| <b>Amplitude</b>                                                                                                        |                                                                                                        |
| <b>Amplitude Accuracy at 1 kHz</b>                                                                                      | $\pm 0.7\%$ of reading, $\pm 0.01\%$ of full scale <sup>4</sup>                                        |
| <b>Flatness</b> (relative to 1 kHz, at full scale)                                                                      | $\pm 1\%$ (0.09 dB)                                                                                    |
| <b>Amplitude Resolution</b>                                                                                             | 16 bits, less 2.3 dB over-range                                                                        |
| <b>Cross Channel Matching</b> (any E1432A module in the same mainframe)                                                 |                                                                                                        |
| <b>Cross Channel Amplitude Match</b><br>(full-scale signal, input ranges equal,<br>frequency above 10 Hz if ac coupled) | $\pm 0.1$ dB                                                                                           |
| <b>Cross Channel Phase Match</b><br>(full-scale signal, input ranges equal)                                             |                                                                                                        |
| 20 kHz                                                                                                                  | $\pm 2.5^\circ$ (or $\pm 350$ ns)                                                                      |
| $F_{\text{HZ}} = 800$ Hz to 20 kHz                                                                                      | $\pm (F_{\text{HZ}} \times 125 \times 10^{-6})^\circ$                                                  |
| 100 Hz to 800 Hz                                                                                                        | $\pm 0.1^\circ$                                                                                        |
| dc to 100 Hz, dc couple                                                                                                 | $\pm 0.1^\circ$                                                                                        |
| 50 Hz to 100 Hz, ac couple                                                                                              | $\pm 0.2^\circ$                                                                                        |

<sup>3</sup> The 20V range is not specified for dynamic range.

<sup>4</sup> The minimum frequency span for any Fs has an amplitude accuracy of 2.5% of reading.

**Dynamic Range**

|                                                                                                                                                                   |                                                                 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
| <b>Resolution</b>                                                                                                                                                 | 16 bits                                                         |
| <b>Spurious Free Dynamic Range</b><br>(includes spurs, harmonic distortion,<br>intermodulation distortion, alias products)<br>(source impedance = 50Ω)            | < -80 dBfs (0.01%fs), -90 dBfs (typical)                        |
| <b>Spurious and Residual Responses</b>                                                                                                                            | < -80 dBfs                                                      |
| <b>Harmonic Distortion</b>                                                                                                                                        | < -80 dBfs, -90 dBfs (typical)                                  |
| <b>Aliased Responses</b> ( $\leq 0$ dBfs, $\leq 1$ MHz)                                                                                                           | < -80 dBfs                                                      |
| <b>Crosstalk</b><br>(receiving channel source impedance = 50Ω,<br>low side grounded, full scale, < 10 kHz signal<br>on other channels, input ranges within 20 dB) | < -80 dBfs (typical)                                            |
| <b>Noise</b> (input terminated with 50Ω, 100 mV range)                                                                                                            |                                                                 |
| Noise density above 100 Hz                                                                                                                                        | < 300 nVrms/ $\sqrt{\text{Hz}}$                                 |
| Noise density at 10 Hz                                                                                                                                            | < 1000 nVrms/ $\sqrt{\text{Hz}}$                                |
| Total rms noise, 23 kHz span                                                                                                                                      | < 45 $\mu\text{Vrms}$                                           |
| <b>Trigger</b>                                                                                                                                                    |                                                                 |
| <b>Trigger Detection</b>                                                                                                                                          | Digital                                                         |
| <b>Trigger Modes</b>                                                                                                                                              | Input, external, source, TTL, TRG, RPM<br>(requires option AYF) |

## Option 1D4 Arbitrary Source Specifications

### General

|                     |                                                                                                           |
|---------------------|-----------------------------------------------------------------------------------------------------------|
| <b>Output Modes</b> | Sine and pseudo random with burst and band translation, arbitrary waveform with loop or continuous output |
|---------------------|-----------------------------------------------------------------------------------------------------------|

### Frequency Bands

#### Sine, noise modes

|                                 |                         |
|---------------------------------|-------------------------|
| Reconstruction filter bandwidth | 0 to 25.6 kHz           |
| DSP data rate (Fs)              | 48.00 kHz to 65.536 kHz |
| Data word size                  | 16 bits                 |

#### Arb modes

|                                 |              |
|---------------------------------|--------------|
| Reconstruction filter bandwidth | 0 to 6.4 kHz |
| Data word size                  | 20 bits      |

|                           |                         |
|---------------------------|-------------------------|
| <b>Frequency Accuracy</b> | $\pm 0.012\%$ (120 ppm) |
|---------------------------|-------------------------|

### Signal Output

|                                  |                         |
|----------------------------------|-------------------------|
| <b>Number of Output Channels</b> | 1                       |
| <b>Maximum Amplitude</b>         | 10 Vp nominal           |
| <b>Output Impedance</b>          | $< 0.5\Omega$ (typical) |
| <b>Maximum Output Current</b>    | 100 mA (typical)        |
| <b>Maximum Capacitive Load</b>   | 0.01 $\mu$ F (typical)  |

### Amplitude Control

(signal amplitude = range  $\times$  scale factor)

|                        |                                    |
|------------------------|------------------------------------|
| Maximum amplitude      | 10 Vp nominal                      |
| Amplitude ranges       | 79 mVp to 10 Vp in 0.375 dB steps  |
| Amplitude scale factor | 0.0 to 1.0, with 20-bit resolution |

|                                                         |                                     |
|---------------------------------------------------------|-------------------------------------|
| <b>Residual Output Noise Voltage</b><br>(Freq > 500 Hz) | $< 500 \text{ nV}/\sqrt{\text{Hz}}$ |
|---------------------------------------------------------|-------------------------------------|

### Residual DC Offset

|                       |                     |
|-----------------------|---------------------|
| Offset after autozero | $\pm 2 \text{ mV}$  |
| Offset after shutdown | $\pm 20 \text{ mV}$ |
| Zeroing resolution    | 100 $\mu$ V         |

|                             |                |
|-----------------------------|----------------|
| <b>Output Overload Trip</b> | $> 17\text{V}$ |
|-----------------------------|----------------|

|                                                   |                 |
|---------------------------------------------------|-----------------|
| <b>Amplitude Ramp-down Time</b><br>(Programmable) | 0 to 30 seconds |
|---------------------------------------------------|-----------------|

### Shutdown

|                        |                  |
|------------------------|------------------|
| Shutdown input         | TTL levels       |
| Shutdown time          | $< 5\text{s}$    |
| Shutdown time, ac fail | $< 4 \text{ ms}$ |

**Sine Output Mode****Sine Frequency** (65536 Hz Fs)

|                      |               |
|----------------------|---------------|
| Frequency range      | 0 to 25.6 kHz |
| Frequency resolution | 244 $\mu$ Hz  |

**Amplitude Accuracy**(1 kHz sine wave, into  $\geq 200\Omega$ )

|                           |                      |
|---------------------------|----------------------|
| 10 Vp to 0.158 Vp ranges  | $\pm 0.20$ dB (2.3%) |
| 0.152 Vp to 79 mVp ranges | $\pm 0.40$ dB (4.7%) |

**Flatness** (relative to 1 kHz) $\pm 0.5$  dB**Harmonic and Aliased-harmonic Distortion**( $\geq 1$  k $\Omega$  load)

|                                                           |             |
|-----------------------------------------------------------|-------------|
| 1 Vp range, 1.0 scale factor, 0 to 6.4 kHz                | $< -80$ dBc |
| 2 to 10 Vp range, 0.05 to 1.0 scale factor, 0 to 25.6 kHz | $< -70$ dBc |

**Spurious responses** $< -60$  dBVp**Constant Level Output****Output Level at 1 kHz**(after 1 second settling, amplitude scale factor  $> 0.001$ )

1 Vp (nominal)

**Output Impedance**1.2 k $\Omega$  (typical)**Flatness**

|                                                     |                                              |
|-----------------------------------------------------|----------------------------------------------|
| 25 Hz to 5 kHz, amplitude scale factor 0.001 to 1.0 | 1.13 Vp to 0.50 Vp (+10, -6.0 dB) (typical)  |
| 5 Hz to 20 kHz, amplitude scale factor 0.01 to 1.0  | 1.13 Vp to 0.44 Vp (+10, -7.0 dB) (typical)  |
| 5 Hz to 20 kHz, amplitude scale factor 0.1 to 1.0   | 1.13 Vp to 0.88 Vp ( $\pm 1.0$ dB) (typical) |

**Sine Wave Distortion**

(at 1 kHz, amplitude scale factor 0.1 to 1.0)

 $-40$  dBc (typical)**Residual dc Offset** $< 5$  mV (typical)**Summer Input****Maximum Input Level**

10 Vp

**Gain, Summer Input to Signal Output** $0 \pm 0.5$  dB at 1 kHz**Input Impedance** $> 10$  k $\Omega$  (typical)**Flatness, dc to 25.6 kHz** $\pm 0.5$  dB (typical)**Sine Wave Distortion** $-80$  dBc (typical)**Residual dc Offset**

1 mV (typical)

## Option AYF Tachometer Input Specifications

### General

---

Option AYF, Tachometer Input, provides two tachometer inputs. When this option is installed, 2 of the 3 SMB connectors on the VXI module are used for tachometer inputs. When this option is not installed, these connectors are normally used for "External Sample" and "Trigger."

Each tachometer input has a programmable trigger level. Each tach pulse causes a "Tach Edge Time" to be recorded in a 16384-word FIFO. A "Tach Edge Time" is the instantaneous value of the 32-bit "Tach Counter". A "Decimate" number can be set to ignore a number of tach pulses before recording each Tach Edge Time. A "Holdoff" time can be set to avoid false triggering due to ringing.

One of the tachometer inputs can be programmed for use as a trigger input rather than a tachometer input. In this mode, the tachometer option can trigger the system and measure the time between the trigger and the next sample clock edge.

The analog signal from either of the Tachometer inputs can be routed to an input channel using the internal calibration path.

|                                             |                                            |
|---------------------------------------------|--------------------------------------------|
| <b>Tach Counter</b>                         | 32-bit counter with roll-over detector bit |
| <b>Decimate Counter</b>                     | 16-bit counter                             |
| <b>Input Signal Trigger Level</b> (typical) |                                            |
| Voltage Range                               | -25V to +25V                               |
| Resolution, levels < $\pm 5V$               | 40 mV                                      |
| Resolution, levels > $\pm 5V$               | 200 mV                                     |
| Hysteresis                                  | Programmable, 0 to 250 mV                  |
| Slope                                       | Programmable, positive or negative         |
| <b>Input Signal Timing</b>                  |                                            |
| Minimum pulse width                         | 5 $\mu s$                                  |
| Maximum pulse rate                          | 100 kHz                                    |
| Trigger holdoff                             | 1 to 65536 clock periods                   |
| <b>Input Impedance</b>                      | 20 k $\Omega$ (typical)                    |



## VXI System Level Specifications

### Features

|                                    |                                                                                                                                                                                                                                                                                                                     |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>VXI Standard Information</b>    | Conforms to VXI revision 1.4<br>C-size, single slot width<br>Register-based programming<br>“Slave” Data Transfer Bus functionality<br>A24 address capability<br>D32 data capability<br>Optional Local Bus capability<br>SMBUS driver and receiver<br>Requires 2 or 4 TTLTRG_ lines for multi-module synchronization |
| <b>Signal Processing</b>           | 33 MHz Motorola 96002 DSP<br>2 banks of 128K word static RAM<br>4 Mbytes dynamic RAM<br>(32 Mbytes with option ANC)<br>128 Kbytes Flash ROM<br>Direct Memory Access (DMA) data transfer                                                                                                                             |
| <b>Software Drivers</b>            |                                                                                                                                                                                                                                                                                                                     |
| <b>Driver Type</b>                 | C libraries with source code                                                                                                                                                                                                                                                                                        |
| <b>Supported Operating Systems</b> | HP-UX 10.20, Windows 95, Windows NT                                                                                                                                                                                                                                                                                 |
| <b>Supply Media</b>                | CD-ROM                                                                                                                                                                                                                                                                                                              |
| <b>Plug &amp; Play Compliance</b>  | C libraries support the Plug & Play standard for HP-UX, MS Windows® 95 and Windows NT®                                                                                                                                                                                                                              |

HP-UX 10.X for HP 9000 Series 700 and 800 computers are X/Open Company UNIX 93 branded products.

MS Windows and Windows NT are U.S. registered trademarks of Microsoft Corporation.

## Regulatory Compliance

|                                                                                                                                                                         |                                                                                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Safety Standards</b>                                                                                                                                                 | Designed for compliance to:<br>UL 1244, 4th Edition<br>IEC 348, 2nd Edition, 1978<br>CSA C22.2, No. 231                                                                |
| <b>Radiated Emissions</b><br>(tested in a “typical” system configuration, consisting of an E1401B Mainframe, V743 Controller, and E1432A module with option 1D4 or AYF) | CISPR 11: 1990, Group 1, Class A<br>(requires connector shields E1400-80920 or E1421-80920)<br><br>Tested for compliance to the European Economic Area’s EMC directive |
| <b>Electrostatic Discharge</b>                                                                                                                                          | Tested for compliance to the European Economic Area’s EMC directive                                                                                                    |
| <b>Radiated Immunity</b>                                                                                                                                                | Tested for compliance to the European Economic Area’s EMC directive                                                                                                    |
| <b>Environmental</b>                                                                                                                                                    |                                                                                                                                                                        |
| <b>Operating Restrictions</b>                                                                                                                                           |                                                                                                                                                                        |
| Ambient Temperature                                                                                                                                                     | 0° to 55 °C                                                                                                                                                            |
| Humidity, Non-condensing                                                                                                                                                | 20% RH to 90% RH at 40 °C                                                                                                                                              |
| Maximum Altitude                                                                                                                                                        | 4600 meters (15,000 feet)                                                                                                                                              |
| <b>Storage and Transport Restrictions</b>                                                                                                                               |                                                                                                                                                                        |
| Ambient Temperature                                                                                                                                                     | -20° to 65 °C                                                                                                                                                          |
| Humidity, Non-condensing                                                                                                                                                | 20% RH to 90% RH at 40 °C                                                                                                                                              |
| Maximum Altitude                                                                                                                                                        | 4600 meters (15,000 feet)                                                                                                                                              |

**General Characteristics****VXI Power Requirements**

| dc Current | 16 Channels | 12 Channels | 8 Channels | 4 Channels |
|------------|-------------|-------------|------------|------------|
|------------|-------------|-------------|------------|------------|

Source option installed

|       |       |       |       |       |
|-------|-------|-------|-------|-------|
| +5V   | 5.20A | 4.93A | 4.66A | 4.39A |
| +12V  | 0.38A | 0.38A | 0.38A | 0.38A |
| -12V  | 0.23A | 0.23A | 0.23A | 0.23A |
| +24V  | 0.85A | 0.84A | 0.83A | 0.82A |
| -24V  | 0.50A | 0.49A | 0.48A | 0.47A |
| -5.2V | 0.28A | 0.28A | 0.28A | 0.28A |
| -2V   | 0.03A | 0.03A | 0.03A | 0.03A |

Tachometer option installed

|       |       |       |       |       |
|-------|-------|-------|-------|-------|
| +5V   | 4.80A | 4.53A | 4.26A | 3.99A |
| +12V  | 0.30A | 0.30A | 0.30A | 0.30A |
| -12V  | 0.09A | 0.09A | 0.09A | 0.09A |
| +24V  | 0.56A | 0.55A | 0.54A | 0.53A |
| -24V  | 0.21A | 0.20A | 0.19A | 0.18A |
| -5.2V | 0.28A | 0.28A | 0.28A | 0.28A |
| -2V   | 0.03A | 0.03A | 0.03A | 0.03A |

No options installed

|       |       |       |       |       |
|-------|-------|-------|-------|-------|
| +5V   | 4.60A | 4.33A | 4.06A | 3.79A |
| +12V  | 0.30A | 0.30A | 0.30A | 0.30A |
| -12V  | 0.09A | 0.09A | 0.09A | 0.09A |
| +24V  | 0.55A | 0.54A | 0.53A | 0.52A |
| -24V  | 0.20A | 0.19A | 0.18A | 0.17A |
| -5.2V | 0.28A | 0.28A | 0.28A | 0.28A |
| -2V   | 0.03A | 0.03A | 0.03A | 0.03A |

**Dynamic Current**

|       |       |
|-------|-------|
| +5V   | 0.10A |
| +12V  | 0.02A |
| -12V  | 0.01A |
| +24V  | 0.01A |
| -24V  | 0.01A |
| -5.2V | 0.01A |
| -2V   | 0.01A |

|                                 |                                                |
|---------------------------------|------------------------------------------------|
| <b>VXI Cooling Requirements</b> | 4.24 liters/second<br>0.33 mm H <sub>2</sub> O |
|---------------------------------|------------------------------------------------|

|                     |            |
|---------------------|------------|
| <b>Warm-up Time</b> | 15 minutes |
|---------------------|------------|

## Performance Benchmarks

---

Because these performance benchmarks depend on the software and hardware configuration, they are included as supplemental, non-warranted characteristics.

---

### VXI Data Transfer Rate (P1 connector)

|                                                                    |          |
|--------------------------------------------------------------------|----------|
| From E1432A DRAM to VXI V743 Controller                            | 6.5 MB/s |
| From E1432A DRAM to MXI to external Series 700 Controller          | 1.5 MB/s |
| From E1432A DRAM to VXLink interface                               | 345 kB/s |
| From E1432A DRAM to E6233A Pentium Controller                      | 1.6 MB/s |
| From E1432A DRAM to National MXI-2 to external 200 MHz Pentium Pro | 1.2 MB/s |

---

### Local Bus Data Transfer Rate

|                                                                                    |                      |
|------------------------------------------------------------------------------------|----------------------|
| From E1432A DRAM, one block, during continuous acquisition                         | 15.7 M Bytes/s       |
| From E1432A's DRAM to E1562D                                                       | 5 MB/s to 7.8 MB/s   |
| From E1432A's DRAM to E1562E                                                       | 10 MB/s to 15.7 MB/s |
| Maximum number of input channels for continuous throughput at 51.2 kHz sample rate | 144 Channels         |

---

### FIFO Memory

|                                              |                                          |
|----------------------------------------------|------------------------------------------|
| (Maximum FIFO size, 4M Bytes DRAM installed) | 2 MSa/number active channels (standard)  |
| (Maximum FIFO size, 32 MB DRAM installed)    | 16 MSa/number active channels (opt. ANC) |

## Specification Note

Specifications describe warranted performance over the temperature range of 0° to 50 °C, after a 15-minute warm-up from ambient conditions. Supplemental characteristics identified as “typical”, provide useful information by giving non-warranted performance parameters. Typical performance is applicable from 20° to 30 °C.

## Abbreviations

**F<sub>s</sub>** = sample rate of ADC.

**F<sub>c</sub>** = cut off frequency of high pass or low pass filters.

**dB<sub>f</sub>** = dB relative to full scale amplitude range.

**dB<sub>c</sub>** = dB relative to carrier amplitude.

**Typical** = typical, non-warranted, performance specification included to provide general product information.

## Warranty Information

The E1433A comes with a three-year warranty. During that period, the unit will either be replaced or repaired, at Agilent's option, and returned to the customer without charge. There is an option available at extra cost which extends the repair support to five years.

## Related Agilent Literature

Agilent E1432/33/34A  
Product Overview  
5965-9834E

[www.agilent.com/find/data\\_acq](http://www.agilent.com/find/data_acq)

## Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

### Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

### Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

### For More Assistance with Your Test & Measurement Needs go to

[www.agilent.com/find/assist](http://www.agilent.com/find/assist)

Or contact the test and measurement experts at Agilent Technologies  
(During normal business hours)

**United States:**  
(tel) 1 800 452 4844

**Latin America:**  
(tel) (305) 267 4245  
(fax) (305) 267 4286

**Canada:**  
(tel) 1 877 894 4414  
(fax) (905) 206 4120

**Australia:**  
(tel) 1 800 629 485  
(fax) (61 3) 9272 0749

**Europe:**  
(tel) (31 20) 547 2323  
(fax) (31 20) 547 2390

**New Zealand:**  
(tel) 0 800 738 378  
(fax) 64 4 495 8950

**Japan:**  
(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

**Asia Pacific:**  
(tel) (852) 3197 7777  
(fax) (852) 2506 9284

Product specifications and descriptions in this document subject to change without notice.  
Copyright © 1997, 1999, 2000 Agilent Technologies  
Printed in U.S.A. 5/00  
5968-8729E



**Agilent Technologies**

Innovating the HP Way

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](https://www.artisanng.com)

