

HP E1463A

32-Channel, 5 Amp, Form C VXI Switch (QUIC)



In Stock

Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/47396-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.


Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship


- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

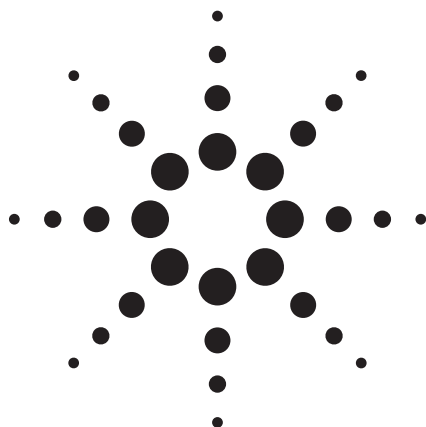

Agilent E1463A
32-Channel, 5 Amp, Form C VXI
Switch
Data Sheet

- 1-Slot, C-size, register based
- Nonlatching relays
- Normally closed/open and common terminals (SPDT)
- Space for adding varistors for greater relay protection
- QUIC easy-to-use terminal block included
- Generates low thermal offset voltage (<3 μ V typical)

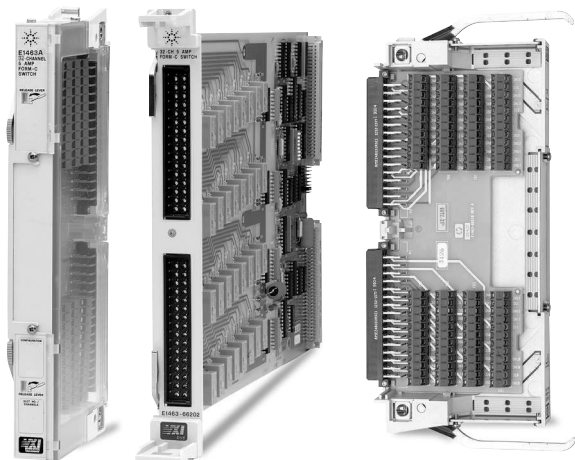

Agilent E1463A

Description

The Agilent E1463A 32-Channel Form C Switch is a **C-size, 1-slot, register-based VXI module**. It is capable of carrying 5 Amp of current on a single channel for power-switching applications. These applications include process control, appliance pass/fail testing, and on/off control among many others.

This general-purpose switch generates low thermal offset voltage (<3 μ V typical), making it suitable for signal switching and scanning applications. The E1463A comes with the QUIC

screw terminal block (optional solder eye connectors) for easy wiring. Space to add series and shunt signal conditioning or circuit-protection elements — MOVs and fuses — is available on the main board but not on the terminal block. Extra screw terminal blocks can be purchased and wired separately if multiple applications share the E1463A.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.



Agilent Technologies
Innovating the HP Way

Product Specifications

Input

Maximum voltage (C to NC or NO or any terminal-to-chassis):	
DC:	125 V (250 V non-switched)
AC rms:	250 V
AC peak:	n/a
Maximum current (noninductive, per switch):	
DC:	5 A, (50 Adc or Aac rms per module)
AC rms:	5 A, (50 Adc or Aac rms per module)
Maximum power:	
Per switch:	
DC:	150 W
AC:	1,250 VA
Per module:	
DC:	1,500 W
AC:	12,500 VA

DC

Maximum thermal offset:	7 μV (<3 μV typ)
Closed channel resistance:	
Initial:	.030 Ω @ 1 A & 6 V DC
End of life:	<2.0 Ω
Insulation resistance (between any two points):	
≤40°C, ≤ 65% RH:	>10E8 Ω
≤40°C, ≤ 95% RH:	n/a
≤25°C, ≤ 40% RH:	>10E9 Ω

AC

Typical bandwidth (−3 dB):	10 MHz
Crosstalk (dB, channel-to-channel):	
<10 kHz:	<−83
<100 kHz:	<−63
<1 MHz:	<−43
<10 MHz:	—
Crosstalk (dB, common-to-NO or NC):	
<10 kHz:	<−80
<100 kHz:	<−60
<1 MHz:	<−40
<10 MHz:	n/a
Crosstalk (dB, module-to-module):	
<10 kHz:	<−100
<100 kHz:	<−100
<1 MHz:	<−90
<10 MHz:	n/a

Closed channel capacitance:	
Ch-to-ch:	<30 pF
Ch-to-com:	<40 pF
Ch-to-guard:	<25 pF

General

Typical relay life (number of operations):	
No load:	>5 x 10E7
Rated load:	>3.5 x 10E4 (250 Vac, 5 A, power factor = 0.4) >10E5 (250 Vac, 5 A resistive) >10E5 (30 Vdc, 5 A L/R = 7 ms)
Time to close or open a channel (register programming):	16 ms
Connector type, wire size:	Screw, ≥18 AWG (1.2 mm)
Power up/down states:	Normally open contact is open

General Specifications

VXI Characteristics

VXI device type:	Register based, A16, slave only
Size:	C
Slots:	1
Connectors:	P1/2
Shared memory:	None
VXI busses:	None
C-size compatibility:	n/a

Instrument Drivers

See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.

Command module firmware:	Downloadable
Command module firmware rev:	A.08
I-SCPI Win 3.1:	Yes
I-SCPI Series 700:	Yes
C-SCPI LynxOS:	Yes
C-SCPI Series 700:	Yes
Panel Drivers:	Yes
VXIplug&play Win Framework:	Yes
VXIplug&play Win 95/NT Framework:	Yes
VXIplug&play HP-UX Framework:	No

Module Current


	I _{PM}	I _{DM}
+5 V:	0.1	0.1
+12 V:	0.6	0.01
–12 V:	0	0
+24 V:	0	0
–24 V:	0	0
–5.2 V	0	0
–2 V:	0	0

Cooling/Slot


Watts/slot:	10.00
ΔP mm H ₂ O:	0.08
Air flow liter/s:	0.42

Ordering Information

Description	Product No.
32-Channel Form C Switch	E1463A
Service Manual	E1463A 0B3
Solder Eye Terminals	E1463A A3G
3 yr. retn. to Agilent to 1 yr. OnSite Warr.	E1463A W01
Extra Terminal Block	E1463-80011

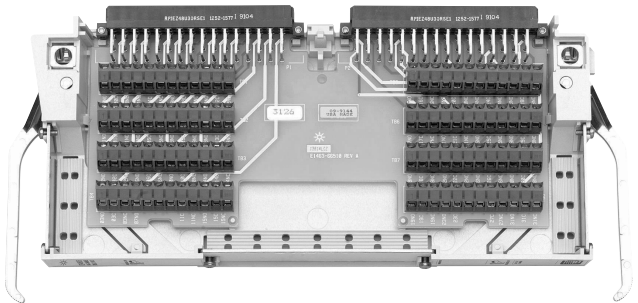

Agilent E1463A Terminal Block

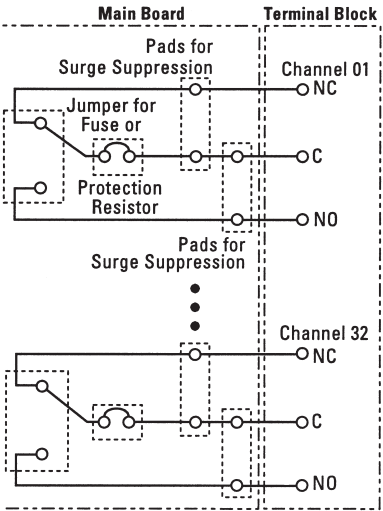

Agilent E1463A Circuit Diagram

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies’ HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office
near you.

Agilent Technologies’ test and measurement service/support
commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone and fax

United States:
Agilent Technologies
(tel) 1 800 452 4844

Canada:
Agilent Technologies Canada Inc.
(tel) 1 877 894 4414

Europe:
Agilent Technologies
Test & Measurement
European Marketing Organisation
(tel) (31 20) 547 2000

Japan:
Agilent Technologies Japan Ltd.
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:
Agilent Technologies
Latin American Region Headquarters, U.S.A.
(tel) (305) 267 4245
(fax) (305) 267 4286

Australia/New Zealand:
Agilent Technologies Australia Pty Ltd.
(tel) 1 800 629 485 (Australia)
(fax) (61 3) 9272 0749
(tel) 0 800 738 378 (New Zealand)
(fax) (64 4) 802 6881

Asia Pacific:
Agilent Technologies, Hong Kong
(tel) (852) 3197-7777
(fax) (852) 2506-9284

Data Subject to Change
© Agilent Technologies 2000
Printed in the U.S.A. 04/2000
Publication No.: 5965-5589E



Agilent Technologies
Innovating the HP Way

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanng.com | [artisanng.com](https://www.artisanng.com)

