

Power Ten R83C-80187
DC Power Supply



© Artisan Technology Group

\$1395.00

In Stock

Qty Available: 1

Used and in Excellent Condition

Open Web Page

<https://www.artisanTG.com/56734-5>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanTG.com | artisanTG.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.



www.tti.co.uk

Tel: 01480 412451



Power Ten: High Power DC Power Supplies

Power Ten supplies are the first choice for semiconductor burn-in systems worldwide and are providing solutions to high power DC voltage requirements in many other diverse applications. These include:

- **Process Control**
- **Production Test**
- **ATE**
- **Ion Implant**
- **High Power Lasers**
- **Medical Systems**
- **Electromagnets**
- **Battery Chargers**
- **Radar Systems**
- **Research / Labs**

Over 93 different output voltage and current combinations are available as standard products.

All power supply designs from Power Ten employ the most reliable, efficient and cost-effective switching technology – including pulse width modulation (PWM) and zero crossing topology to achieve both high-efficiency and high-density packaging. A 10kW model is available in only a 5-1/4" high (3U), rackmounted configuration.

Product quality starts with engineering as a design criteria and is ensured by our highly trained staff of manufacturing and test personnel. Long-term reliability is achieved by care in the derating of components combined with a conservative approach to mechanical and thermal design.

2 kW and 3 kW

- **Single Phase & Three Phase Models**
- **Low Peak-to-Peak Ripple & Noise**
- **CE & TUV**
- **Optional IEEE 488.2 and RS 232 Remote Programming with SCPI Protocol**



3.3 kW, 6.6 kW and 10 kW

- **3-Phase Input Power**
- **Low Peak-to-Peak Ripple & Noise**
- **CE & TUV**
- **Optional IEEE 488.2 and RS 232 Remote Programming with SCPI Protocol**



13 kW, 16.5 kW and 20 kW

- **3-Phase Input Power**
- **Low Peak-to-Peak Ripple & Noise**
- **CE & TUV**
- **Optional IEEE 488.2 and RS 232 Remote Programming with SCPI Protocol**



Power Ten: Common Specifications

Common Specifications

Regulation (Line or Load)

Voltage: 0.1% of maximum rated output

Current: 0.5% of maximum rated output

Transient Response

A 30% current step load will recover to within $\pm 2\%$ of set voltage within 10 msec.

Stability

$\pm 0.05\%$ of set point per 8 hours after 30 minutes warm-up at fixed line, load and temperature.

Temperature Coefficient

0.02%/°C of rated output voltage

0.03%/°C of rated output current

Operating Temperature

0 to +50° C, No derating

Storage Temperature

-20 to +70°C

Cooling

Internal fans

Controls (Front Panel)

On/Off switch, DC volts adjust, DC amps adjust, OVP preset adjust (limit set)

Meters/Indicators

LCD DC voltmeter, ammeter and OVP limit set. LED indicators for voltage mode, current mode. OVP fault and fault

Built-In Protection

Over Voltage, Current limit Fold back, Over Temperature, Brown Out, Turn On Surge Limit, Slow Start

Remote Control/Monitor (Rear Panel)

On/Off control via contact closure, 6-120 VDC, TTL or CMOS switch, output voltage and current monitor, OVP limit set, summary fault status on P60 Series.

Remote Programming

Voltage (0 to 100%) Current (0 to 100%)

Resistive: 0-5K ohms 0-5K ohms

Voltage: 0-5 VDC or 10 VDC 0-5 VDC or 10 VDC

Optional IEEE 488.2 and RS 232 Programming with SCPI protocol.

Remote Sensing:

Terminals provided to sense output voltage at load

Operational Features:

Master/Slave, Series, Parallel

Primary Power (Standard)

P62B Series

190-253 VAC¹

P63C and P66C

190-253 VAC²

Web Site

For information regarding installation, operation and maintenance, visit our web site at:

www.elgar.com

¹ May be ordered as Single or 3-Phase

(3 phase 3 kW only)

² Optional Inputs: 360-440 VAC and 432-528 VAC

P 62 Series

Input Voltage

190 – 253 VAC, 47 – 63 Hz

Input Current (Typical)

	Single Phase @ 230 VAC	3-Phase @ 208 VAC
At 2.0 kW Output:	15 A	
At 3.0 kW Output:	21 A	15 A

Physical

Weight: 45 Lbs.

Dimensions: 19" (W) X 3-1/2" (H) X 18" (D)

AC Input Interface:

Single Phase: 2 wire + GND
(#8-32 threaded studs)
Three Phase: 3 wire + GND
(#8-32 threaded studs)

DC Output Interface: Bus bars with 0.375" interface holes for output ≤ 60 VDC. Two position barrier strip for output ≥ 80 VDC

Control/Monitor Interface:

DB 25-pin female connector

P 63 Series

Input Voltage

190-253 VAC, 47-63 Hz (Standard)
360-440 VAC, 47-63 Hz (Option)
432-528 VAC, 47-63 Hz (Option)

Input Current @ 208 VAC (Typical)

At 3.3 kW Output: 15 A
At 6.6 kW Output: 28 A
At 10.0 kW Output: 41 A
Operates from Delta or Wye Source

Physical

Weight: 3.3 kW: 40 Lbs.
6.6 kW: 60 Lbs.
10.0 kW: 80 Lbs.

Dimensions: 19" (W) X 5.25" (H) X 22" (D)

AC Input Interface: 3 wire + GND (#10-32 threaded studs) (208 VAC)

DC Output Interface: Bus bars with 0.390" interface holes for output ≤ 50 VDC.

Control/Monitor Interface:

DB 25-pin female connector

P 66 Series

Input Voltage

190-253 VAC, 47-63 Hz (Standard)
360-440 VAC, 47-63 Hz (Option)
432-528 VAC, 47-63 Hz (Option)

Input Current @ 208 VAC (Typical)

At 13 kW Output: 54 A
At 16.5 kW Output: 67 A
At 20 kW Output: 80 A
Operates from Delta or Wye Source

Physical

Weight: 13 kW: 120 Lbs.
16.5 kW: 140 Lbs.
20 kW: 160 Lbs.

Dimensions: 19" (W) X 10.5" (H) X 22" (D)

AC Input Interface:

3 wire + GND (#1/4-20 threaded studs) (208 VAC)

DC Output Interface: Bus bars with 0.410" interface holes for output ≤ 50 VDC.

Control/Monitor Interface:

DB 25-pin female connector

Model	Output DC		Output P-P Ripple ¹
	Volts	Amps	
P62 Series: 2 kW to 3 kW ²			
P62B-5325	0-5	325	50 mV
P62B-8250	0-8	250	50 mV
P62B-8350	0-8	350	50 mV
P62B-10200	0-10	200	50 mV
P62B-10300	0-10	300	50 mV
P62B-15130	0-15	130	50 mV
P62B-15200	0-15	200	50 mV
P62B-20100	0-20	100	75 mV
P62B-20150	0-20	150	75 mV
P62B-3066	0-30	66	75 mV
P62B-30100	0-30	100	75 mV
P62B-4050	0-40	50	75 mV
P62B-4075	0-40	75	75 mV
P62B-5040	0-50	40	75 mV
P62B-5060	0-50	60	75 mV
P62B-6033	0-60	33	75 mV
P62B-6050	0-60	50	75 mV
P62B-8025	0-80	25	100 mV
P62B-8037	0-80	37	100 mV
P62B-10020	0-100	20	125 mV
P62B-10030	0-100	30	125 mV
P62B-12016	0-120	16	135 mV
P62B-12025	0-120	25	135 mV
P62B-15013	0-150	13	150 mV
P62B-15020	0-150	20	150 mV
P62B-20010	0-200	10	175 mV
P62B-20015	0-200	15	175 mV
P62B-2508	0-250	8	200 mV
P62B-25012	0-250	12	200 mV
P62B-3006.6	0-300	6.6	200 mV
P62B-30010	0-300	10	200 mV
P62B-4005	0-400	5	225 mV
P62B-4007.5	0-400	7.5	225 mV

Model	Output DC		Output P-P Ripple
	Volts	Amps	
P63 Series: 3.3 kW to 10 kW*			
P63C-5500	0-5	500	50 mV
P63C-51000	0-5	1000	50 mV
P63C-51500	0-5	1500	50 mV
P63C-8400	0-8	400	50 mV
P63C-8800	0-8	800	50 mV
P63C-81200	0-8	1200	50 mV
P63C-10330	0-10	330	50 mV
P63C-10660	0-10	660	50 mV
P63C-101000	0-10	1000	50 mV
P63C-12.5265	0-12.5	265	50 mV
P63C-12.5530	0-12.5	530	50 mV
P63C-12.5800	0-12.5	800	50 mV
P63C-15220	0-15	220	50 mV
P63C-15440	0-15	440	50 mV
P63C-15660	0-15	660	50 mV
P63C-20166	0-20	166	75 mV
P63C-20330	0-20	330	75 mV
P63C-20500	0-20	500	75 mV
P63C-25134	0-25	132	75 mV
P63C-25265	0-25	265	75 mV
P63C-25400	0-25	400	75 mV
P63C-30110	0-30	110	75 mV
P63C-30220	0-30	220	75 mV
P63C-30330	0-30	330	75 mV
P63C-4083	0-40	83	75 mV
P63C-40166	0-40	166	75 mV
P63C-40250	0-40	250	75 mV
P63C-5066	0-50	66	75 mV
P63C-50133	0-50	133	75 mV
P63C-50200	0-50	200	75 mV

Model	Output DC		Output P-P Ripple
	Volts	Amps	
P66 Series: 13.3 kW to 20 kW*			
P66C-52000	0-5	2000	50 mV
P66C-52500	0-5	2500	50 mV
P66C-53000	0-5	3000	50 mV
P66C-81600	0-8	1600	50 mV
P66C-82000	0-8	2000	50 mV
P66C-82400	0-8	2400	50 mV
P66C-101300	0-10	1300	50 mV
P66C-101650	0-10	1650	50 mV
P66C-102000	0-10	2000	50 mV
P66C-12.51060	0-12.5	1060	50 mV
P66C-12.51325	0-12.5	1325	50 mV
P66C-12.51600	0-12.5	1600	50 mV
P66C-15880	0-15	880	50 mV
P66C-151100	0-15	1100	50 mV
P66C-151320	0-15	1320	50 mV
P66C-20665	0-20	665	75 mV
P66C-20830	0-20	830	75 mV
P66C-201000	0-20	1000	75 mV
P66C-25520	0-25	520	75 mV
P66C-25650	0-25	650	75 mV
P66C-25800	0-25	800	75 mV
P66C-30440	0-30	440	75 mV
P66C-30550	0-30	550	75 mV
P66C-30660	0-30	660	75 mV
P66C-40330	0-40	330	75 mV
P66C-40415	0-40	415	75 mV
P66C-40500	0-40	500	75 mV
P66C-50265	0-50	265	75 mV
P66C-50330	0-50	330	75 mV
P66C-50400	0-50	400	75 mV

*Note: For high voltage models 60V and above see SGA Series.

Available from:



Measurably better value

Thurlby Thandar Instruments Ltd. Glebe Road, Huntingdon, Cambs. PE29 7DR U.K.
 Tel: 01480 412451, Fax: 01480 450409, e-mail: sales@tti.co.uk
 Web: www.tti.co.uk

¹ Peak-to-peak ripple and noise is over the entire range of the power supply as measured in the voltage mode at the end of a 6-foot cable across a 1µf film capacitor into a resistive load. Low noise option available on ≤60 V models. Please contact the factory.

² Available with 3-phase input option (3 kW only).

Remote Computer Programming Options

IEEE 488.2 and RS 232 Interface Option enables the power supply to be operated from a computer with full remote programming control and monitoring. The slave interface option allows multichannel control from a single bus address.

Programming Resolution

Voltage: 0.03% of full scale
Current: 0.03% of full scale
Over voltage Protection: 0.03% of full scale
(full scale is 120% of maximum output voltage)

Programming Accuracy

Voltage: $\pm (0.1\% + 0.1\% \text{ of maximum output voltage})$
Current: $\pm (0.1\% + 0.4\% \text{ of maximum output voltage})^*$

Overvoltage Protection:

$\pm (0.5\% + 0.5\% \text{ of maximum output voltage})$

Readback Resolution

Voltage and Current: $\pm 0.03\% \text{ of full scale}$

Readback Accuracy

Voltage: $\pm (0.1\% + 0.15\% \text{ of full scale output voltage})$
Current: $\pm (0.1\% + 0.4\% \text{ of full scale output current})^*$

* After 30 minutes operation with fixed line, load and temperature.

Programmable Functions

- Output Voltage and Current
- Soft Limits for Voltage and Current
- Over Voltage Protection
- Output Enable/Disable
- Maskable Fault Interrupt
- Hold and Trigger

Readback Functions

- Actual Measured Voltage and Current
- Voltage and Current Settings
- Soft Voltage and Current Limits
- Over Voltage Protection Setting
- Status and Accumulated Status Registers
- Programming Error Codes
- Fault Codes
- Manufacturer, Power Supply Model and Firmware Version Identification

Isolated Analog Option

- Fully Isolates Control Inputs
- Eliminates System Ground-Loops
- Specifications
 - Input to Output Isolation: 500V
 - Linearity Control to Power Output: $\pm 1\%$ (20-100% of Output)
 - Isolation Mode Rejection: 10 KV/ μ S
 - Isolation Mode Rejection Ratio: > 100 dB


This control isolation option for all Power Ten power supply models fully isolates the remote control signals. This isolation allows users to control power supplies not connected to a common ground. In addition, in systems with high ambient noise or with large ground loop currents the control ground can be isolated from the power ground eliminating problems.



www.tti.co.uk


Tel: 01480 412451

P 62 Series




Dimensions in inches (millimeters)


P 63 Series

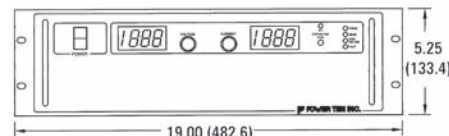

P 66 Series

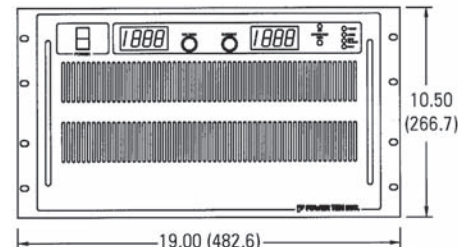

Model Configuration

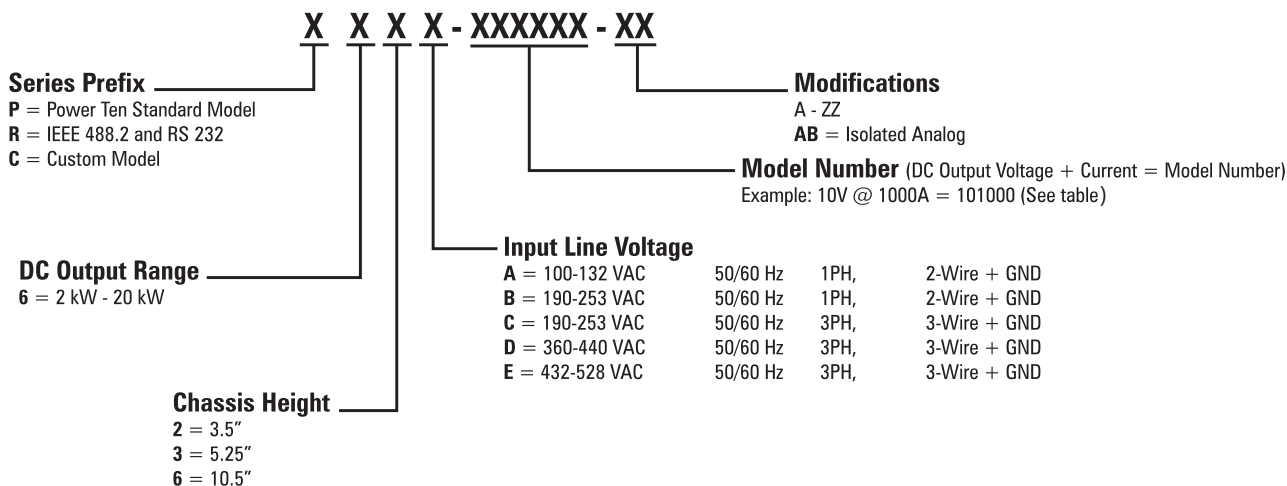

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanTG.com | [artisanTG.com](https://www.artisanTG.com)

