

PCB Piezotronics 353B04
ICP Accelerometer



\$250.00

In Stock

Qty Available: 5+

Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/92182-7>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

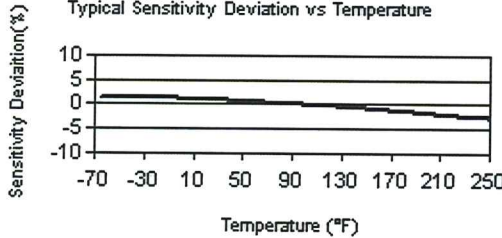
Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

Model Number 353B04		ICP® ACCELEROMETER		Revision: K ECN #: 35369																																																										
Performance <table border="1"> <thead> <tr> <th></th> <th>ENGLISH</th> <th>SI</th> <th></th> </tr> </thead> <tbody> <tr> <td>Sensitivity(± 5 %)</td> <td>10 mV/g</td> <td>1.02 mV/(m/s²)</td> <td>[2]</td> </tr> <tr> <td>Measurement Range</td> <td>± 500 g pk</td> <td>± 4905 m/s² pk</td> <td></td> </tr> <tr> <td>Frequency Range(± 5 %)</td> <td>1 to 7000 Hz</td> <td>1 to 7000 Hz</td> <td></td> </tr> <tr> <td>Frequency Range(± 10 %)</td> <td>0.7 to 11,000 Hz</td> <td>0.7 to 11,000 Hz</td> <td></td> </tr> <tr> <td>Frequency Range(± 3 dB)</td> <td>0.35 to 20,000 Hz</td> <td>0.35 to 20,000 Hz</td> <td></td> </tr> <tr> <td>Resonant Frequency</td> <td>≥ 38 kHz</td> <td>≥ 38 kHz</td> <td></td> </tr> <tr> <td>Broadband Resolution(1 to 10,000 Hz)</td> <td>0.003 g rms</td> <td>0.03 m/s² rms</td> <td>[1]</td> </tr> <tr> <td>Non-Linearity</td> <td>≤ 1 %</td> <td>≤ 1 %</td> <td>[3]</td> </tr> <tr> <td>Transverse Sensitivity</td> <td>≤ 5 %</td> <td>≤ 5 %</td> <td>[4]</td> </tr> </tbody> </table>							ENGLISH	SI		Sensitivity(± 5 %)	10 mV/g	1.02 mV/(m/s²)	[2]	Measurement Range	± 500 g pk	± 4905 m/s² pk		Frequency Range(± 5 %)	1 to 7000 Hz	1 to 7000 Hz		Frequency Range(± 10 %)	0.7 to 11,000 Hz	0.7 to 11,000 Hz		Frequency Range(± 3 dB)	0.35 to 20,000 Hz	0.35 to 20,000 Hz		Resonant Frequency	≥ 38 kHz	≥ 38 kHz		Broadband Resolution(1 to 10,000 Hz)	0.003 g rms	0.03 m/s² rms	[1]	Non-Linearity	≤ 1 %	≤ 1 %	[3]	Transverse Sensitivity	≤ 5 %	≤ 5 %	[4]																	
	ENGLISH	SI																																																												
Sensitivity(± 5 %)	10 mV/g	1.02 mV/(m/s²)	[2]																																																											
Measurement Range	± 500 g pk	± 4905 m/s² pk																																																												
Frequency Range(± 5 %)	1 to 7000 Hz	1 to 7000 Hz																																																												
Frequency Range(± 10 %)	0.7 to 11,000 Hz	0.7 to 11,000 Hz																																																												
Frequency Range(± 3 dB)	0.35 to 20,000 Hz	0.35 to 20,000 Hz																																																												
Resonant Frequency	≥ 38 kHz	≥ 38 kHz																																																												
Broadband Resolution(1 to 10,000 Hz)	0.003 g rms	0.03 m/s² rms	[1]																																																											
Non-Linearity	≤ 1 %	≤ 1 %	[3]																																																											
Transverse Sensitivity	≤ 5 %	≤ 5 %	[4]																																																											
Environmental <table border="1"> <thead> <tr> <th></th> <th>ENGLISH</th> <th>SI</th> <th></th> </tr> </thead> <tbody> <tr> <td>Overload Limit(Shock)</td> <td>± 10,000 g pk</td> <td>± 98,100 m/s² pk</td> <td></td> </tr> <tr> <td>Temperature Range(Operating)</td> <td>-65 to +250 °F</td> <td>-54 to +121 °C</td> <td></td> </tr> <tr> <td>Temperature Response</td> <td>See Graph</td> <td>See Graph</td> <td>[1]</td> </tr> <tr> <td>Base Strain Sensitivity</td> <td>≤ 0.0005 g/με</td> <td>≤ 0.005 (m/s²)/με</td> <td>[1]</td> </tr> </tbody> </table>							ENGLISH	SI		Overload Limit(Shock)	± 10,000 g pk	± 98,100 m/s² pk		Temperature Range(Operating)	-65 to +250 °F	-54 to +121 °C		Temperature Response	See Graph	See Graph	[1]	Base Strain Sensitivity	≤ 0.0005 g/με	≤ 0.005 (m/s²)/με	[1]																																					
	ENGLISH	SI																																																												
Overload Limit(Shock)	± 10,000 g pk	± 98,100 m/s² pk																																																												
Temperature Range(Operating)	-65 to +250 °F	-54 to +121 °C																																																												
Temperature Response	See Graph	See Graph	[1]																																																											
Base Strain Sensitivity	≤ 0.0005 g/με	≤ 0.005 (m/s²)/με	[1]																																																											
Electrical <table border="1"> <thead> <tr> <th></th> <th>ENGLISH</th> <th>SI</th> <th></th> </tr> </thead> <tbody> <tr> <td>Excitation Voltage</td> <td>18 to 30 VDC</td> <td>18 to 30 VDC</td> <td></td> </tr> <tr> <td>Constant Current Excitation</td> <td>2 to 20 mA</td> <td>2 to 20 mA</td> <td></td> </tr> <tr> <td>Output Impedance</td> <td>≤ 100 ohm</td> <td>≤ 100 ohm</td> <td></td> </tr> <tr> <td>Output Bias Voltage</td> <td>8 to 12 VDC</td> <td>8 to 12 VDC</td> <td></td> </tr> <tr> <td>Discharge Time Constant</td> <td>0.5 to 2.6 sec</td> <td>0.5 to 2.6 sec</td> <td></td> </tr> <tr> <td>Settling Time(within 10% of bias)</td> <td><5 sec</td> <td><5 sec</td> <td></td> </tr> <tr> <td>Spectral Noise(1 Hz)</td> <td>2800 μg/√Hz</td> <td>27,468 (μm/sec²)/√Hz</td> <td>[1]</td> </tr> <tr> <td>Spectral Noise(10 Hz)</td> <td>700 μg/√Hz</td> <td>6867 (μm/sec²)/√Hz</td> <td>[1]</td> </tr> <tr> <td>Spectral Noise(100 Hz)</td> <td>180 μg/√Hz</td> <td>1766 (μm/sec²)/√Hz</td> <td>[1]</td> </tr> <tr> <td>Spectral Noise(1 kHz)</td> <td>64 μg/√Hz</td> <td>628 (μm/sec²)/√Hz</td> <td>[1]</td> </tr> </tbody> </table>							ENGLISH	SI		Excitation Voltage	18 to 30 VDC	18 to 30 VDC		Constant Current Excitation	2 to 20 mA	2 to 20 mA		Output Impedance	≤ 100 ohm	≤ 100 ohm		Output Bias Voltage	8 to 12 VDC	8 to 12 VDC		Discharge Time Constant	0.5 to 2.6 sec	0.5 to 2.6 sec		Settling Time(within 10% of bias)	<5 sec	<5 sec		Spectral Noise(1 Hz)	2800 μg/√Hz	27,468 (μm/sec²)/√Hz	[1]	Spectral Noise(10 Hz)	700 μg/√Hz	6867 (μm/sec²)/√Hz	[1]	Spectral Noise(100 Hz)	180 μg/√Hz	1766 (μm/sec²)/√Hz	[1]	Spectral Noise(1 kHz)	64 μg/√Hz	628 (μm/sec²)/√Hz	[1]													
	ENGLISH	SI																																																												
Excitation Voltage	18 to 30 VDC	18 to 30 VDC																																																												
Constant Current Excitation	2 to 20 mA	2 to 20 mA																																																												
Output Impedance	≤ 100 ohm	≤ 100 ohm																																																												
Output Bias Voltage	8 to 12 VDC	8 to 12 VDC																																																												
Discharge Time Constant	0.5 to 2.6 sec	0.5 to 2.6 sec																																																												
Settling Time(within 10% of bias)	<5 sec	<5 sec																																																												
Spectral Noise(1 Hz)	2800 μg/√Hz	27,468 (μm/sec²)/√Hz	[1]																																																											
Spectral Noise(10 Hz)	700 μg/√Hz	6867 (μm/sec²)/√Hz	[1]																																																											
Spectral Noise(100 Hz)	180 μg/√Hz	1766 (μm/sec²)/√Hz	[1]																																																											
Spectral Noise(1 kHz)	64 μg/√Hz	628 (μm/sec²)/√Hz	[1]																																																											
Physical <table border="1"> <thead> <tr> <th></th> <th>ENGLISH</th> <th>SI</th> <th></th> </tr> </thead> <tbody> <tr> <td>Sensing Element</td> <td>Quartz</td> <td>Quartz</td> <td></td> </tr> <tr> <td>Sensing Geometry</td> <td>Shear</td> <td>Shear</td> <td></td> </tr> <tr> <td>Housing Material</td> <td>Titanium</td> <td>Titanium</td> <td></td> </tr> <tr> <td>Sealing</td> <td>Welded Hermetic</td> <td>Welded Hermetic</td> <td></td> </tr> <tr> <td>Size (Hex x Height)</td> <td>0.50 in x 1.14 in</td> <td>12.7 mm x 29.0 mm</td> <td></td> </tr> <tr> <td>Weight</td> <td>0.38 oz</td> <td>10.5 gm</td> <td>[1]</td> </tr> <tr> <td>Electrical Connector</td> <td>10-32 Coaxial Jack</td> <td>10-32 Coaxial Jack</td> <td></td> </tr> <tr> <td>Electrical Connection Position</td> <td>Top</td> <td>Top</td> <td></td> </tr> <tr> <td>Mounting Thread</td> <td>10-32 Female</td> <td>10-32 Female</td> <td></td> </tr> </tbody> </table>							ENGLISH	SI		Sensing Element	Quartz	Quartz		Sensing Geometry	Shear	Shear		Housing Material	Titanium	Titanium		Sealing	Welded Hermetic	Welded Hermetic		Size (Hex x Height)	0.50 in x 1.14 in	12.7 mm x 29.0 mm		Weight	0.38 oz	10.5 gm	[1]	Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack		Electrical Connection Position	Top	Top		Mounting Thread	10-32 Female	10-32 Female																		
	ENGLISH	SI																																																												
Sensing Element	Quartz	Quartz																																																												
Sensing Geometry	Shear	Shear																																																												
Housing Material	Titanium	Titanium																																																												
Sealing	Welded Hermetic	Welded Hermetic																																																												
Size (Hex x Height)	0.50 in x 1.14 in	12.7 mm x 29.0 mm																																																												
Weight	0.38 oz	10.5 gm	[1]																																																											
Electrical Connector	10-32 Coaxial Jack	10-32 Coaxial Jack																																																												
Electrical Connection Position	Top	Top																																																												
Mounting Thread	10-32 Female	10-32 Female																																																												
OPTIONAL VERSIONS Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used. B - Low bias electronics <table border="1"> <thead> <tr> <th></th> <th>ENGLISH</th> <th>SI</th> </tr> </thead> <tbody> <tr> <td>Output Bias Voltage</td> <td>4.5 to 7.5 VDC</td> <td>4.5 to 7.5 VDC</td> </tr> <tr> <td>Excitation Voltage</td> <td>12 to 30 VDC</td> <td>12 to 30 VDC</td> </tr> <tr> <td>Constant Current Excitation</td> <td>1 to 20 mA</td> <td>1 to 20 mA</td> </tr> <tr> <td>Measurement Range</td> <td>± 300 g pk</td> <td>± 2943 m/s² pk</td> </tr> </tbody> </table> J - Ground Isolated <table border="1"> <thead> <tr> <th></th> <th>ENGLISH</th> <th>SI</th> </tr> </thead> <tbody> <tr> <td>Frequency Range(± 5 %)</td> <td>1 to 5000 Hz</td> <td>1 to 5000 Hz</td> </tr> <tr> <td>Frequency Range(± 10 %)</td> <td>0.7 to 9000 Hz</td> <td>0.7 to 9000 Hz</td> </tr> <tr> <td>Resonant Frequency</td> <td>≥ 22 kHz</td> <td>≥ 22 kHz</td> </tr> <tr> <td>Electrical Isolation(Base)</td> <td>≥ 10⁸ ohm</td> <td>≥ 10⁸ ohm</td> </tr> <tr> <td>Size - Hex x Height</td> <td>0.50 in x 1.19 in</td> <td>12.7 mm x 30.2 mm</td> </tr> </tbody> </table> Q - Extended discharge time constant <table border="1"> <thead> <tr> <th></th> <th>ENGLISH</th> <th>SI</th> </tr> </thead> <tbody> <tr> <td>Frequency Range(± 5 %)</td> <td>0.1 to 7000 Hz</td> <td>0.1 to 7000 Hz</td> </tr> <tr> <td>Frequency Range(± 10 %)</td> <td>0.07 to 11,000 Hz</td> <td>0.07 to 11,000 Hz</td> </tr> <tr> <td>Discharge Time Constant</td> <td>>10 sec</td> <td>>10 sec</td> </tr> <tr> <td>Settling Time(within 10% of bias)</td> <td>45 sec</td> <td>45 sec</td> </tr> </tbody> </table> Supplied Accessory : Model ACS-4 Single axis, low frequency phase and amplitude response cal from 0.5 to 10 Hz W - Water Resistant Cable <table border="1"> <thead> <tr> <th></th> <th>ENGLISH</th> <th>SI</th> </tr> </thead> <tbody> <tr> <td>Electrical Connector</td> <td>Sealed Integral Cable</td> <td>Sealed Integral Cable</td> </tr> <tr> <td>Electrical Connection Position</td> <td>Top</td> <td>Top</td> </tr> </tbody> </table>							ENGLISH	SI	Output Bias Voltage	4.5 to 7.5 VDC	4.5 to 7.5 VDC	Excitation Voltage	12 to 30 VDC	12 to 30 VDC	Constant Current Excitation	1 to 20 mA	1 to 20 mA	Measurement Range	± 300 g pk	± 2943 m/s² pk		ENGLISH	SI	Frequency Range(± 5 %)	1 to 5000 Hz	1 to 5000 Hz	Frequency Range(± 10 %)	0.7 to 9000 Hz	0.7 to 9000 Hz	Resonant Frequency	≥ 22 kHz	≥ 22 kHz	Electrical Isolation(Base)	≥ 10⁸ ohm	≥ 10⁸ ohm	Size - Hex x Height	0.50 in x 1.19 in	12.7 mm x 30.2 mm		ENGLISH	SI	Frequency Range(± 5 %)	0.1 to 7000 Hz	0.1 to 7000 Hz	Frequency Range(± 10 %)	0.07 to 11,000 Hz	0.07 to 11,000 Hz	Discharge Time Constant	>10 sec	>10 sec	Settling Time(within 10% of bias)	45 sec	45 sec		ENGLISH	SI	Electrical Connector	Sealed Integral Cable	Sealed Integral Cable	Electrical Connection Position	Top	Top
	ENGLISH	SI																																																												
Output Bias Voltage	4.5 to 7.5 VDC	4.5 to 7.5 VDC																																																												
Excitation Voltage	12 to 30 VDC	12 to 30 VDC																																																												
Constant Current Excitation	1 to 20 mA	1 to 20 mA																																																												
Measurement Range	± 300 g pk	± 2943 m/s² pk																																																												
	ENGLISH	SI																																																												
Frequency Range(± 5 %)	1 to 5000 Hz	1 to 5000 Hz																																																												
Frequency Range(± 10 %)	0.7 to 9000 Hz	0.7 to 9000 Hz																																																												
Resonant Frequency	≥ 22 kHz	≥ 22 kHz																																																												
Electrical Isolation(Base)	≥ 10⁸ ohm	≥ 10⁸ ohm																																																												
Size - Hex x Height	0.50 in x 1.19 in	12.7 mm x 30.2 mm																																																												
	ENGLISH	SI																																																												
Frequency Range(± 5 %)	0.1 to 7000 Hz	0.1 to 7000 Hz																																																												
Frequency Range(± 10 %)	0.07 to 11,000 Hz	0.07 to 11,000 Hz																																																												
Discharge Time Constant	>10 sec	>10 sec																																																												
Settling Time(within 10% of bias)	45 sec	45 sec																																																												
	ENGLISH	SI																																																												
Electrical Connector	Sealed Integral Cable	Sealed Integral Cable																																																												
Electrical Connection Position	Top	Top																																																												
NOTES: [1] Typical. [2] B and Q options supplied with a sensitivity tolerance of ± 10 %. [3] Zero-based, least-squares, straight line method. [4] Transverse sensitivity is typically ≤ 3%. [5] See PCB Declaration of Conformance PS023 for details.																																																														
SUPPLIED ACCESSORIES: Model 080A Adhesive Mounting Base (1) Model 080A109 Petro Wax (1) Model 081B05 Mounting Stud (10-32 to 10-32) (1) Model ACS-1 NIST traceable frequency response (10 Hz to upper 5% point). (1) Model M081B05 Mounting Stud 10-32 to M6 X 0.75 (1)																																																														
<table border="1"> <tr> <td>Entered: <u>4pmw</u></td> <td>Engineer: <u>BAM</u></td> <td>Sales: <u>WDC</u></td> <td>Approved: <u>EB</u></td> <td>Spec Number:</td> </tr> <tr> <td>Date: <u>3/24/11</u></td> <td>Date: <u>3/24/11</u></td> <td>Date: <u>3/24/11</u></td> <td>Date: <u>3/24/11</u></td> <td>353-2040-80</td> </tr> </table>						Entered: <u>4pmw</u>	Engineer: <u>BAM</u>	Sales: <u>WDC</u>	Approved: <u>EB</u>	Spec Number:	Date: <u>3/24/11</u>	Date: <u>3/24/11</u>	Date: <u>3/24/11</u>	Date: <u>3/24/11</u>	353-2040-80																																															
Entered: <u>4pmw</u>	Engineer: <u>BAM</u>	Sales: <u>WDC</u>	Approved: <u>EB</u>	Spec Number:																																																										
Date: <u>3/24/11</u>	Date: <u>3/24/11</u>	Date: <u>3/24/11</u>	Date: <u>3/24/11</u>	353-2040-80																																																										
 [5] Typical Sensitivity Deviation vs Temperature 																																																														
All specifications are at room temperature unless otherwise specified. In the interest of constant product improvement, we reserve the right to change specifications without notice. ICP® is a registered trademark of PCB Group, Inc.																																																														
 Phone: 716-684-0001 Fax: 716-685-3886 E-Mail: vibration@pcb.com 3425 Walden Avenue, Depew, NY 14043																																																														

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanng.com | [artisanng.com](https://www.artisanng.com)

