



**ARTISAN**<sup>®</sup>  
TECHNOLOGY GROUP

Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanTG.com](mailto:sales@artisanTG.com) | [artisanTG.com](http://artisanTG.com)

**Full-service, independent repair center**

with experienced engineers and technicians on staff.

**We buy your excess, underutilized, and idle equipment**

along with credit for buybacks and trade-ins.

**Custom engineering**

so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

**Expert team | Trust guarantee | 100% satisfaction**

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Emerson / Asco 8262G262* at our website: ***Click HERE***

### Features

- Reliable, proven design with high flows
- Small poppet valves for tight shutoff
- Wide range of elastomers for specialty service
- Mountable in any position
- Brass and stainless steel constructions

### Construction

| Valve Parts in Contact with Fluids                                                                       |                      |                         |
|----------------------------------------------------------------------------------------------------------|----------------------|-------------------------|
| Body                                                                                                     | Brass                | 303/304 Stainless Steel |
| Seals and Discs                                                                                          | NBR or Cast UR       |                         |
| Core Tube                                                                                                | 305 Stainless Steel  |                         |
| Core and Plugnut                                                                                         | 430F Stainless Steel |                         |
| Springs                                                                                                  | 302 Stainless Steel  |                         |
| Shading Coil                                                                                             | Copper               | Silver                  |
| Stem                                                                                                     | PA (Normally Open)   |                         |
| <b>Note:</b> All 1/8" NPT Normally Open valves contain CA. All 1/4" NPT Normally Open valves contain PA. |                      |                         |

### Electrical

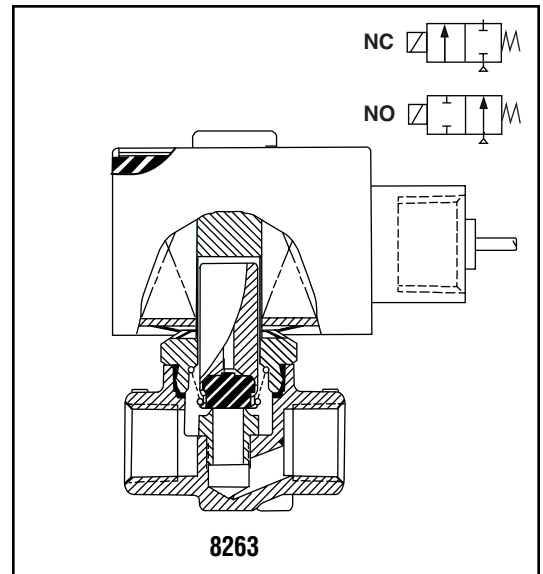
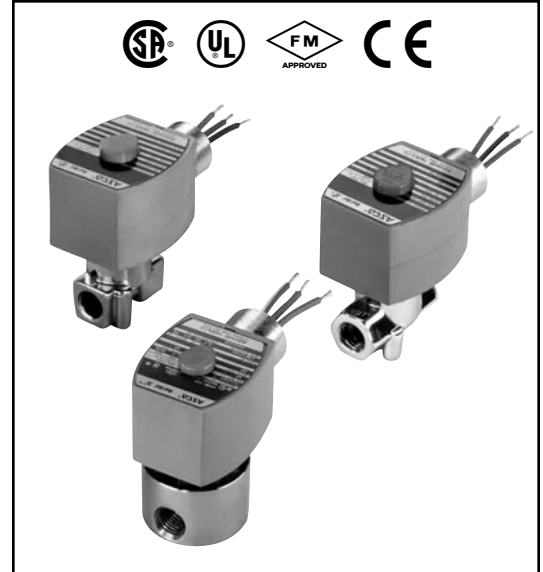
| Standard Coil and Class of Insulation                                                                                                                                                                | Watt Rating and Power Consumption |       |            |           | Spare Coil Part No. |        |                |        |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|-------|------------|-----------|---------------------|--------|----------------|--------|
|                                                                                                                                                                                                      | DC Watts                          | AC    |            |           | General Purpose     |        | Explosionproof |        |
|                                                                                                                                                                                                      |                                   | Watts | VA Holding | VA Inrush | AC                  | DC     | AC             | DC     |
| F                                                                                                                                                                                                    | 10.6                              | 6.1   | 16         | 30        | 238210              | 238310 | 238214         | 238314 |
| F                                                                                                                                                                                                    | -                                 | 9.1   | 20         | 45        | 238210              | -      | 238214         | -      |
| F                                                                                                                                                                                                    | 11.6                              | 10.1  | 25         | 50        | 238610              | 238710 | 238614         | 238714 |
| F                                                                                                                                                                                                    | 22.6                              | 17.1  | 40         | 70        | 238610              | 238710 | 238614         | 238714 |
| <b>Standard Voltages:</b> 24, 120, 240, 480 volts AC, 60 Hz (or 110, 220 volts AC, 50 Hz). 6, 12, 24, 120, 240 volts DC. Must be specified when ordering.<br>Other voltages available when required. |                                   |       |            |           |                     |        |                |        |

### Solenoid Enclosures

**Standard:** Watertight, Types 1, 2, 3, 3S, 4, and 4X.

**Optional:** Explosionproof and Watertight, Types 3, 3S, 4, 4X, 6, 6P, 7, and 9.  
(To order, add prefix "EF" to catalog number)

See *Optional Features Section* for other available options.



### Nominal Ambient Temp. Ranges

AC: 32°F to 125°F (0°C to 52°C)

DC: 32°F to 104°F (0°C to 40°C)

Refer to *Engineering Section* for details.

### Approvals

CSA certified. UL listed, as indicated. Normally Closed Valves FM approved. Meets applicable CE directives.

Refer to *Engineering Section* for details.

**Specifications (English units)**

| Pipe Size<br>(ins.)                                                                                                                                                                                                        | Orifice Size<br>(ins.) | Cv Flow Factor | Operating Pressure Differential (psi) |       |                   |               |       |                   | Max. Fluid Temp. °F |     | Brass Body     |             |              | Stainless Steel Body |             |              | Watt Rating/<br>Class of Coil Insulation ② |        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|----------------|---------------------------------------|-------|-------------------|---------------|-------|-------------------|---------------------|-----|----------------|-------------|--------------|----------------------|-------------|--------------|--------------------------------------------|--------|
|                                                                                                                                                                                                                            |                        |                | Max. AC                               |       |                   | Max. DC       |       |                   |                     |     |                |             |              |                      |             |              |                                            |        |
|                                                                                                                                                                                                                            |                        |                | Air-Inert Gas                         | Water | Lt. Oil @ 300 SSU | Air-Inert Gas | Water | Lt. Oil @ 300 SSU | AC                  | DC  | Catalog Number | Const. Ref. | UL ③ Listing | Catalog Number       | Const. Ref. | UL ③ Listing | AC                                         | DC     |
| NORMALLY CLOSED (Closed when de-energized), NBR Disc                                                                                                                                                                       |                        |                |                                       |       |                   |               |       |                   |                     |     |                |             |              |                      |             |              |                                            |        |
| 1/8                                                                                                                                                                                                                        | 3/64                   | .06            | 750                                   | 750   | 530               | 650           | 640   | 550               | 180                 | 120 | 8262G001       | 1           | ○            | 8262G012             | 1           | ○            | 6.1/F                                      | 10.6/F |
| 1/8                                                                                                                                                                                                                        | 3/32                   | .20            | 275                                   | 290   | 130               | 150           | 140   | 145               | 180                 | 120 | 8262G014       | 1           | ○            | 8262G015             | 1           | ○            | 6.1/F                                      | 10.6/F |
| 1/8                                                                                                                                                                                                                        | 1/8                    | .34            | 155                                   | 180   | 140               | 80            | 80    | 80                | 180                 | 120 | 8262G002       | 1           | ○            | 8262G006             | 1           | ○            | 6.1/F                                      | 10.6/F |
| 1/4                                                                                                                                                                                                                        | 3/64                   | .06            | 750                                   | 750   | 500               | 500           | 500   | 500               | 180                 | 120 | 8262G019       | 16          | ○            | 8262G080             | 11          | ○            | 6.1/F                                      | 10.6/F |
| 1/4                                                                                                                                                                                                                        | 3/64                   | .06            | 1500                                  | 1500  | 1100              | 475           | 475   | 450               | 140                 | 140 | 8262G200 ①     | 17          | ●            | -                    | -           | -            | 10.1/F                                     | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 3/64                   | .06            | 2200                                  | 2000  | 1100              | -             | -     | -                 | 140                 | 140 | -              | -           | -            | 8262G214 ①           | 12          | ●            | 10.1/F                                     | -      |
| 1/4                                                                                                                                                                                                                        | 3/32                   | .17            | 360                                   | 340   | 160               | 150           | 125   | 125               | 180                 | 120 | 8262G020       | 16          | ○            | 8262G086             | 11          | ○            | 6.1/F                                      | 10.6/F |
| 1/4                                                                                                                                                                                                                        | 3/32                   | .17            | 500                                   | 500   | 280               | -             | -     | -                 | 180                 | -   | 8262G021       | 16          | ○            | -                    | -           | -            | 9.1/F                                      | -      |
| 1/4                                                                                                                                                                                                                        | 1/8                    | .35            | 140                                   | 165   | 90                | 65            | 60    | 60                | 180                 | 120 | 8262G022       | 16          | ○            | 8262G007             | 11          | ○            | 6.1/F                                      | 10.6/F |
| 1/4                                                                                                                                                                                                                        | 1/8                    | .35            | 300                                   | 300   | 200               | 75            | 70    | 70                | 180                 | 150 | 8262G232       | 17          | ○            | -                    | -           | -            | 10.1/F                                     | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 5/32                   | .50            | 180                                   | 200   | 145               | 40            | 40    | 45                | 180                 | 150 | 8262G202       | 4           | ○            | 8262G220             | 12          | ○            | 10.1/F                                     | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 7/32                   | .72            | 90                                    | 100   | 100               | 25            | 25    | 25                | 180                 | 150 | 8262G208       | 4           | ○            | 8262G226             | 12          | ○            | 10.1/F                                     | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 7/32                   | .85            | 40                                    | 50    | 40                | 17            | 20    | 21                | 180                 | 120 | 8262G013       | 2           | ○            | 8262G036             | 11          | ○            | 6.1/F                                      | 10.6/F |
| 1/4                                                                                                                                                                                                                        | 9/32                   | .88            | 60                                    | 75    | 60                | 18            | 15    | 18                | 180                 | 150 | 8262G210       | 4           | ○            | -                    | -           | -            | 10.1/F                                     | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 9/32                   | .88            | 90                                    | 100   | 90                | 25            | 20    | 22                | 180                 | 150 | 8262G212       | 6           | ○            | 8262G230             | 13          | ○            | 17.1/F                                     | 22.6/F |
| 1/4                                                                                                                                                                                                                        | 9/32                   | .96            | 27                                    | 36    | 28                | 15            | 16    | 16                | 180                 | 120 | 8262G090       | 2           | ○            | 8262G038             | 11          | ○            | 6.1/F                                      | 10.6/F |
| 3/8                                                                                                                                                                                                                        | 1/8                    | .35            | 160                                   | 150   | 90                | 65            | 60    | 60                | 180                 | 120 | 8263G002       | 3           | ○            | 8263G330             | 3           | ○            | 6.1/F                                      | 10.6/F |
| 3/8                                                                                                                                                                                                                        | 5/32                   | .52            | 100                                   | 100   | 100               | 35            | 35    | 35                | 180                 | 150 | 8263G200       | 5           | ○            | 8263G331             | 5           | ○            | 10.1/F                                     | 11.6/F |
| 3/8                                                                                                                                                                                                                        | 7/32                   | .72            | 100                                   | 100   | 100               | 25            | 25    | 25                | 180                 | 150 | 8263G206       | 5           | ○            | 8263G332             | 5           | ○            | 17.1/F                                     | 11.6/F |
| 3/8                                                                                                                                                                                                                        | 9/32                   | .85            | 100                                   | 100   | 70                | -             | -     | -                 | 180                 | -   | 8263G210       | 7           | ○            | 8263G333             | 7           | ○            | 17.1/F                                     | -      |
| NORMALLY OPEN (Open when de-energized), NBR Disc (except where noted)                                                                                                                                                      |                        |                |                                       |       |                   |               |       |                   |                     |     |                |             |              |                      |             |              |                                            |        |
| 1/8                                                                                                                                                                                                                        | 1/16                   | .09            | 500                                   | 300   | 225               | 400           | 250   | 150               | 180                 | 120 | 8262G091       | 8           | ●            | 8262G092             | 8           | ●            | 6.1/F                                      | 10.6/F |
| 1/8                                                                                                                                                                                                                        | 3/32                   | .15            | 275                                   | 200   | 150               | 190           | 110   | 110               | 180                 | 120 | 8262G093       | 8           | ●            | 8262G094             | 8           | ●            | 6.1/F                                      | 10.6/F |
| 1/8                                                                                                                                                                                                                        | 1/8                    | .21            | 125                                   | 100   | 85                | 80            | 60    | 50                | 180                 | 120 | 8262G031       | 8           | ●            | 8262G035             | 8           | ●            | 6.1/F                                      | 10.6/F |
| 1/4                                                                                                                                                                                                                        | 3/64                   | .06            | 750                                   | 700   | 700               | 500           | 500   | 500               | 140                 | 140 | 8262G260 ①     | 9           | ●            | 8262G130 ①           | 14          | ●            | 10.1/F                                     | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 3/32                   | .17            | 300                                   | 250   | 230               | 200           | 150   | 125               | 140                 | 140 | 8262G261 ①     | 9           | ●            | 8262G134 ①           | 14          | ●            | 10.1/F                                     | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 1/8                    | .35            | 130                                   | 110   | 100               | 80            | 60    | 60                | 180                 | 150 | 8262G262       | 9           | ●            | 8262G138             | 14          | ●            | 10.1/F                                     | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 5/32                   | .49            | 85                                    | 75    | 60                | 45            | 30    | 30                | 180                 | 150 | 8262G263       | 4           | ●            | 8262G142             | 14          | ●            | 10.1/F                                     | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 7/32                   | .83            | 45                                    | 45    | 40                | 25            | 20    | 20                | 180                 | 150 | 8262G264       | 4           | ●            | 8262G148             | 14          | ●            | 10.1/F                                     | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 9/32                   | .96            | 30                                    | 25    | 20                | 15            | 15    | 15                | 180                 | 150 | 8262G265       | 4           | ●            | 8262G152             | 14          | ●            | 10.1/F                                     | 11.6/F |
| ① Cast UR disc supplied as standard.<br>② On 50 hertz service, the rating for the 6.1/F solenoid is 8.1 watts.<br>③ ○ Safety Shutoff Valve; ● General Purpose Valve. Refer to Engineering Section (Approvals) for details. |                        |                |                                       |       |                   |               |       |                   |                     |     |                |             |              |                      |             |              |                                            |        |

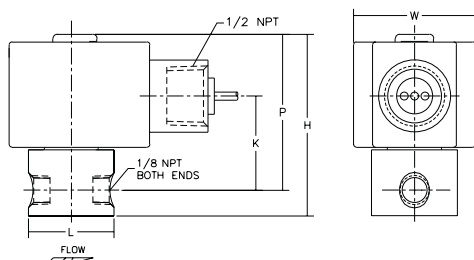
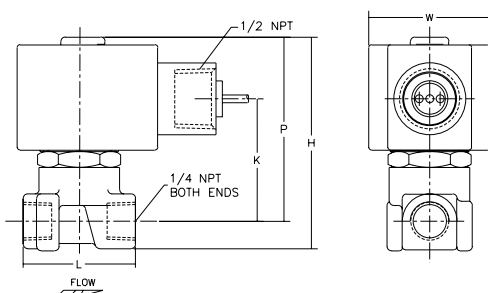
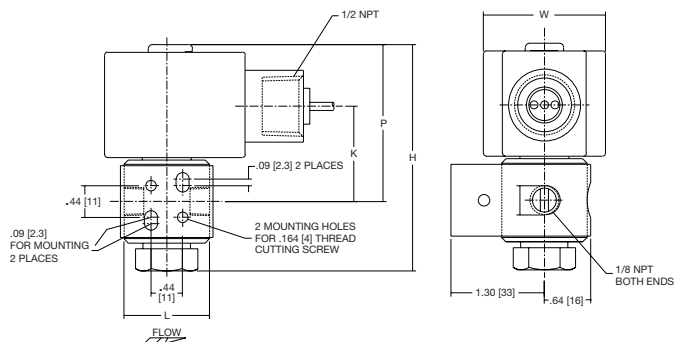
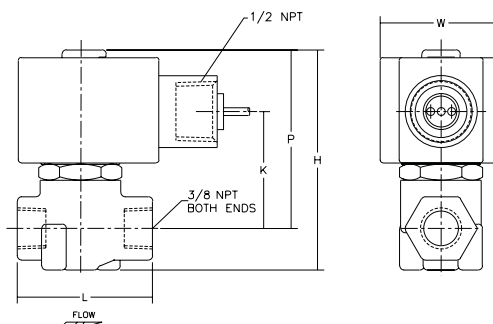
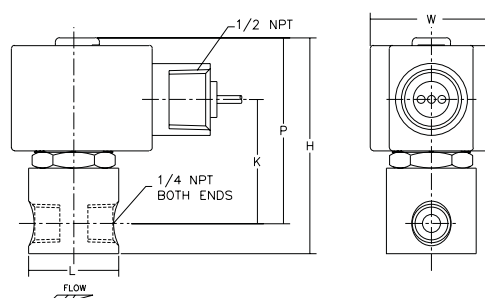
## Specifications (Metric units)

| Pipe Size<br>(ins.)                                                                                                                                                                                                        | Orifice<br>Size<br>(mm) | Kv Flow<br>Factor<br>(m3/h) | Operating Pressure Differential (bar) |       |                         |                  |       |                         | Max.<br>Fluid<br>Temp. °C |    | Brass Body        |                |                 | Stainless Steel Body |                |                 | Watt Rating/<br>Class of Coil<br>Insulation ② |        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----------------------------|---------------------------------------|-------|-------------------------|------------------|-------|-------------------------|---------------------------|----|-------------------|----------------|-----------------|----------------------|----------------|-----------------|-----------------------------------------------|--------|
|                                                                                                                                                                                                                            |                         |                             | Max. AC                               |       |                         | Max. DC          |       |                         |                           |    |                   |                |                 |                      |                |                 |                                               |        |
|                                                                                                                                                                                                                            |                         |                             | Air-Inert<br>Gas                      | Water | Lt. Oil<br>@ 300<br>SSU | Air-Inert<br>Gas | Water | Lt. Oil<br>@ 300<br>SSU | AC                        | DC | Catalog<br>Number | Const.<br>Ref. | UL ③<br>Listing | Catalog<br>Number    | Const.<br>Ref. | UL ③<br>Listing | AC                                            | DC     |
| NORMALLY CLOSED (Closed when de-energized), NBR Disc                                                                                                                                                                       |                         |                             |                                       |       |                         |                  |       |                         |                           |    |                   |                |                 |                      |                |                 |                                               |        |
| 1/8                                                                                                                                                                                                                        | 1.2                     | .05                         | 52                                    | 52    | 37                      | 45               | 44    | 38                      | 82                        | 49 | 8262G001          | 1              | ○               | 8262G012             | 1              | ○               | 6.1/F                                         | 10.6/F |
| 1/8                                                                                                                                                                                                                        | 2.4                     | .17                         | 19                                    | 20    | 9                       | 10               | 10    | 10                      | 82                        | 49 | 8262G014          | 1              | ○               | 8262G015             | 1              | ○               | 6.1/F                                         | 10.6/F |
| 1/8                                                                                                                                                                                                                        | 3.2                     | .29                         | 11                                    | 12    | 10                      | 6                | 6     | 6                       | 82                        | 49 | 8262G002          | 1              | ○               | 8262G006             | 1              | ○               | 6.1/F                                         | 10.6/F |
| 1/4                                                                                                                                                                                                                        | 1.2                     | .05                         | 52                                    | 52    | 34                      | 34               | 34    | 34                      | 82                        | 49 | 8262G019          | 16             | ○               | 8262G080             | 11             | ○               | 6.1/F                                         | 10.6/F |
| 1/4                                                                                                                                                                                                                        | 1.2                     | .05                         | 103                                   | 103   | 76                      | 33               | 33    | 31                      | 60                        | 60 | 8262G200 ①        | 17             | ●               | -                    | -              | -               | 10.1/F                                        | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 1.2                     | .05                         | 152                                   | 138   | 76                      | -                | -     | -                       | 60                        | 60 | -                 | -              | -               | 8262G214 ①           | 12             | ●               | 10.1/F                                        | -      |
| 1/4                                                                                                                                                                                                                        | 2.4                     | .15                         | 25                                    | 23    | 11                      | 10               | 9     | 9                       | 82                        | 49 | 8262G020          | 16             | ○               | 8262G086             | 11             | ○               | 6.1/F                                         | 10.6/F |
| 1/4                                                                                                                                                                                                                        | 2.4                     | .15                         | 34                                    | 34    | 19                      | -                | -     | -                       | 82                        | -  | 8262G021          | 16             | ○               | -                    | -              | -               | 9.1/F                                         | -      |
| 1/4                                                                                                                                                                                                                        | 3.2                     | .30                         | 10                                    | 11    | 6                       | 4                | 4     | 4                       | 82                        | 49 | 8262G022          | 16             | ○               | 8262G007             | 11             | ○               | 6.1/F                                         | 10.6/F |
| 1/4                                                                                                                                                                                                                        | 3.2                     | .30                         | 21                                    | 21    | 14                      | 5                | 5     | 5                       | 82                        | 65 | 8262G232          | 17             | ○               | -                    | -              | -               | 10.1/F                                        | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 4.0                     | .43                         | 12                                    | 14    | 10                      | 3                | 3     | 3                       | 82                        | 65 | 8262G202          | 4              | ○               | 8262G220             | 12             | ○               | 10.1/F                                        | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 5.6                     | .62                         | 6                                     | 7     | 7                       | 2                | 2     | 2                       | 82                        | 65 | 8262G208          | 4              | ○               | 8262G226             | 12             | ○               | 10.1/F                                        | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 5.6                     | .73                         | 3                                     | 3     | 3                       | 1                | 1     | 1                       | 82                        | 49 | 8262G013          | 2              | ○               | 8262G036             | 11             | ○               | 6.1/F                                         | 10.6/F |
| 1/4                                                                                                                                                                                                                        | 7.1                     | .75                         | 4                                     | 5     | 4                       | 1                | 1     | 1                       | 82                        | 65 | 8262G210          | 4              | ○               | -                    | -              | -               | 10.1/F                                        | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 7.1                     | .75                         | 6                                     | 7     | 6                       | 2                | 1     | 2                       | 82                        | 65 | 8262G212          | 6              | ○               | 8262G230             | 13             | ○               | 17.1/F                                        | 22.6/F |
| 1/4                                                                                                                                                                                                                        | 7.1                     | .82                         | 2                                     | 2     | 2                       | 1                | 1     | 1                       | 82                        | 49 | 8262G090          | 2              | ○               | 8262G038             | 11             | ○               | 6.1/F                                         | 10.6/F |
| 3/8                                                                                                                                                                                                                        | 3.3                     | .30                         | 11                                    | 10    | 6                       | 4                | 4     | 4                       | 82                        | 49 | 8263G002          | 3              | ○               | 8263G330             | 3              | ○               | 6.1/F                                         | 10.6/F |
| 3/8                                                                                                                                                                                                                        | 4.0                     | .45                         | 7                                     | 7     | 7                       | 2                | 2     | 2                       | 82                        | 65 | 8263G200          | 5              | ○               | 8263G331             | 5              | ○               | 10.1/F                                        | 11.6/F |
| 3/8                                                                                                                                                                                                                        | 5.6                     | .62                         | 7                                     | 7     | 7                       | 2                | 2     | 2                       | 82                        | 65 | 8263G206          | 5              | ○               | 8263G332             | 5              | ○               | 17.1/F                                        | 11.6/F |
| 3/8                                                                                                                                                                                                                        | 7.1                     | .73                         | 7                                     | 7     | 5                       | -                | -     | -                       | 82                        | -  | 8263G210          | 7              | ○               | 8263G333             | 7              | ○               | 17.1/F                                        | -      |
| NORMALLY OPEN (Open when de-energized), NBR Disc (except where noted)                                                                                                                                                      |                         |                             |                                       |       |                         |                  |       |                         |                           |    |                   |                |                 |                      |                |                 |                                               |        |
| 1/8                                                                                                                                                                                                                        | 1.6                     | .08                         | 34                                    | 21    | 16                      | 28               | 17    | 10                      | 82                        | 49 | 8262G091          | 8              | ●               | 8262G092             | 8              | ●               | 6.1/F                                         | 10.6/F |
| 1/8                                                                                                                                                                                                                        | 2.4                     | .13                         | 19                                    | 14    | 10                      | 13               | 8     | 8                       | 82                        | 49 | 8262G093          | 8              | ●               | 8262G094             | 8              | ●               | 6.1/F                                         | 10.6/F |
| 1/8                                                                                                                                                                                                                        | 3.2                     | .18                         | 9                                     | 7     | 6                       | 6                | 4     | 3                       | 82                        | 49 | 8262G031          | 8              | ●               | 8262G035             | 8              | ●               | 6.1/F                                         | 10.6/F |
| 1/4                                                                                                                                                                                                                        | 1.2                     | .05                         | 52                                    | 48    | 48                      | 34               | 34    | 34                      | 60                        | 60 | 8262G260 ①        | 9              | ●               | 8262G130 ①           | 14             | ●               | 10.1/F                                        | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 2.4                     | .15                         | 21                                    | 17    | 16                      | 14               | 10    | 9                       | 60                        | 60 | 8262G261 ①        | 9              | ●               | 8262G134 ①           | 14             | ●               | 10.1/F                                        | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 3.2                     | .30                         | 9                                     | 8     | 7                       | 6                | 4     | 4                       | 82                        | 65 | 8262G262          | 9              | ●               | 8262G138             | 14             | ●               | 10.1/F                                        | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 4.0                     | .42                         | 6                                     | 5     | 4                       | 3                | 2     | 2                       | 82                        | 65 | 8262G263          | 4              | ●               | 8262G142             | 14             | ●               | 10.1/F                                        | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 5.6                     | .71                         | 3                                     | 3     | 3                       | 2                | 1     | 1                       | 82                        | 65 | 8262G264          | 4              | ●               | 8262G148             | 14             | ●               | 10.1/F                                        | 11.6/F |
| 1/4                                                                                                                                                                                                                        | 7.1                     | .82                         | 2                                     | 2     | 1                       | 1                | 1     | 1                       | 82                        | 65 | 8262G265          | 4              | ●               | 8262G152             | 14             | ●               | 10.1/F                                        | 11.6/F |
| ① Cast UR disc supplied as standard.<br>② On 50 hertz service, the rating for the 6.1/F solenoid is 8.1 watts.<br>③ ○ Safety Shutoff Valve; ● General Purpose Valve. Refer to Engineering Section (Approvals) for details. |                         |                             |                                       |       |                         |                  |       |                         |                           |    |                   |                |                 |                      |                |                 |                                               |        |


**Dimensions: inches (mm)**

| Const. Ref. |      | H    | K    | L    | P    | W    |
|-------------|------|------|------|------|------|------|
| 1           | ins. | 2.52 | 1.30 | 1.19 | 2.16 | 1.69 |
|             | mm   | 64   | 33   | 30   | 55   | 43   |
| 2           | ins. | 2.98 | 1.71 | 1.56 | 2.57 | 1.69 |
|             | mm   | 76   | 43   | 40   | 65   | 43   |
| 3           | ins. | 3.07 | 1.63 | 1.88 | 2.49 | 1.69 |
|             | mm   | 78   | 41   | 48   | 63   | 43   |
| 4           | ins. | 3.20 | 1.78 | 1.56 | 2.79 | 1.95 |
|             | mm   | 81   | 45   | 40   | 71   | 50   |
| 5           | ins. | 3.25 | 1.70 | 2.00 | 2.77 | 1.95 |
|             | mm   | 83   | 43   | 51   | 70   | 50   |
| 6           | ins. | 3.16 | 1.78 | 1.56 | 2.75 | 1.95 |
|             | mm   | 80   | 45   | 40   | 70   | 50   |
| 7           | ins. | 3.25 | 1.70 | 2.00 | 2.67 | 1.95 |
|             | mm   | 83   | 43   | 51   | 68   | 50   |
| 8           | ins. | 3.15 | 1.32 | 1.19 | 2.18 | 1.69 |
|             | mm   | 80   | 34   | 30   | 55   | 43   |
| 9           | ins. | 3.23 | 1.67 | 1.25 | 2.81 | 1.95 |
|             | mm   | 82   | 42   | 32   | 71   | 50   |
| 11          | ins. | 2.94 | 1.71 | 1.56 | 2.57 | 1.69 |
|             | mm   | 75   | 43   | 40   | 65   | 43   |
| 12          | ins. | 3.12 | 1.78 | 1.56 | 2.75 | 1.95 |
|             | mm   | 79   | 45   | 40   | 70   | 50   |
| 13          | ins. | 3.12 | 1.78 | 1.56 | 2.75 | 1.95 |
|             | mm   | 79   | 45   | 40   | 70   | 50   |
| 14          | ins. | 3.16 | 1.65 | 1.56 | 2.79 | 1.95 |
|             | mm   | 80   | 42   | 40   | 71   | 50   |
| 16          | ins. | 3.01 | 1.73 | 1.25 | 2.59 | 1.69 |
|             | mm   | 76   | 44   | 32   | 66   | 43   |
| 17          | ins. | 3.19 | 1.80 | 1.25 | 2.77 | 1.95 |
|             | mm   | 81   | 46   | 32   | 70   | 50   |


**IMPORTANT:** Valves may be mounted in any position.

**Const. Ref. 1**

**Const. Ref. 2, 4, 6, 9**

**Const. Refs. 8**

**Const. Ref. 3, 5, 7**

**Const. Ref. 11-14, 16, 17**

**Mounting Details**


MOUNTING HOLES  
IN VALVE BODY  
BRASS-CONST. REFS. 3, 5, 7



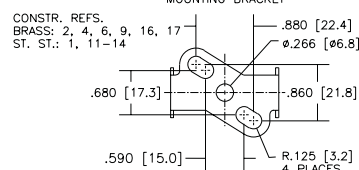
CONST. REF.  
9, 16, 17



CONST. REF. 1  
(BRASS)



MOUNTING BRACKET



# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](https://www.artisanng.com)

