

Ascor 7022

## 4x16 Single Wire Matrix Module



Limited Availability  
Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/62510-5>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source  
for quality pre-owned  
equipment.

**Artisan Technology Group**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](http://artisanng.com)

- Critical and expedited services
- In stock / Ready-to-ship
- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.



## Product Description

The 7018 provides 32 SPST Switches in a small space. This module provides the highest density general purpose switch, ideal for switching UUT Power as well as other current carrying signals. The 7018 has been designed with several exceptional features that make it stand out from competitive products.

- **3U Form Factor** – The 3U PXI format is the most popular PXI size, and is compatible with all brands of PXI approved products.
- **Positronic Connectors** – Selected for high bandwidth and robust performance.


## Capabilities

- 32 SPST
- Bandwidth = 153MHz
- Voltage Max = 220VDC, 250VAC
- Current Max = 2A (switched)

## Recommended Uses

- **General Purpose switching** – the ease of expansion using this module makes it ideal for all Low Frequency switching applications.



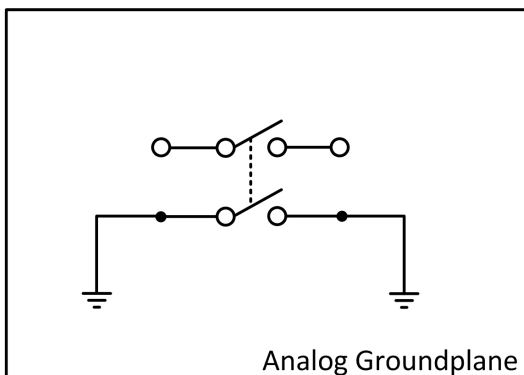

Typical Channel (1 of 32). Second Pole of DPST grounded for improved Bandwidth

- All ASCOR cards have built-in circuitry to verify both the control signal from the programming register, as well as verifying the relay coil is intact.
- All Switching modules feature built-in memory to maintain the service record of the unit with time stamping.
- All Modules carry a full 3 year Warranty

## Specifications

### Electrical

- Voltage Max = 220VDC, 250VAC
- Current Max = 2A (switched)
- Max Power = 60W or 62.5VA
- Bandwidth = 153MHz
- Crosstalk = -22dB @ 100MHz
- Life Expectancy = 500K cycles
- Contact Resistance < 60mΩ
- 1 & J2 Connectors
- Positronic SMPL34M0TOLB

### Environmental

#### Temperature

- Operating 0° to 50°C
- Storage -40° to 75°C

#### Humidity (non-condensing)

- Operating 10 to 90%
- Storage 0 to 95%

### Mechanical

- 3U PXI
- Weight 0.5 lbs

## Ordering Information

Model #	Description	Manufacturer #
7018	32 SPST, 2A, 153MHz	91000150
	Set of Mating connectors for one Module	89800570
	Set of Pigtail Cables for one Module, 6ft length	89800570-006

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at [artisanng.com](https://www.artisanng.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

**We're here to make your life easier. How can we help you today?**

(217) 352-9330 | [sales@artisanng.com](mailto:sales@artisanng.com) | [artisanng.com](https://www.artisanng.com)

