

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

Artisan Technology Group
(217) 352-9330 | sales@artisantg.com | artisantg.com

Full-service, independent repair center
with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment
along with credit for buybacks and trade-ins.

Custom engineering
so your equipment works exactly as you specify.


- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *Emerson / Motorola MVME712M / MVME712/M* at our website: *Click HERE*

MOTOROLA

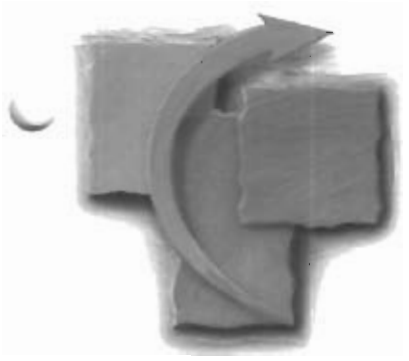

MVME712C
Transition Board

Installation Instructions

Installation Instructions

for

MVME712C Transition Board

(MVME712KC/K1)

NOTICE

While reasonable efforts have been made to assure the accuracy of this document, Motorola, Inc. assumes no liability resulting from any omissions in this document, or from the use of the information obtained therein. Motorola reserves the right to revise this document and to make changes from time to time in the content hereof without obligation of Motorola to notify any person of such revision or changes.

No part of this material may be reproduced or copied in any tangible medium, or stored in a retrieval system, or transmitted in any form, or by any means, radio, electronic, mechanical, photocopying, recording or facsimile, or otherwise, without the prior written permission of Motorola, Inc.

RESTRICTED RIGHTS LEGEND

If the documentation contained herein is supplied, directly or indirectly, to the U.S. Government, the following notice shall apply unless otherwise agreed to in writing by Motorola, Inc.

Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013.

Motorola, Inc.
Computer Group
2900 South Diablo Way
Tempe, Arizona 85282

WARNING

THIS EQUIPMENT GENERATES, USES, AND CAN RADIATE RADIO FREQUENCY ENERGY AND IF NOT INSTALLED AND USED IN ACCORDANCE WITH THE INSTRUCTIONS MANUAL, MAY CAUSE INTERFERENCE TO RADIO COMMUNICATIONS. IT HAS BEEN TESTED AND FOUND TO COMPLY WITH THE LIMITS FOR A CLASS A COMPUTING DEVICE PURSUANT TO SUBPART J OF PART 15 OF FCC RULES, WHICH ARE DESIGNED TO PROVIDE REASONABLE PROTECTION AGAINST SUCH INTERFERENCE WHEN OPERATED IN A COMMERCIAL ENVIRONMENT.

OPERATION OF THIS EQUIPMENT IN A RESIDENTIAL AREA IS LIKELY TO CAUSE INTERFERENCE IN WHICH CASE THE USER, AT HIS OWN EXPENSE, WILL BE REQUIRED TO TAKE WHATEVER MEASURES NECESSARY TO CORRECT THE INTERFERENCE.

Motorola® and the Motorola symbol are registered trademarks of Motorola, Inc.

© Copyright Motorola 1991
All Rights Reserved
Printed in the United States of America
January 1992

PREFACE

This document (Part Number MVME712KC/K1) provides installation instructions for the MVME712C transition board.

It is important that this document is read before doing the installation.

These installations should be performed by trained service personnel only.

Table of Contents

MVME712C Installation Instructions 1
- Additional Documents 1
- System Cautions 1
- Upgrade Instructions 1
  - System Shutdown 1

MVME712C Installation for 3-Slot System 2
- Chassis Preparation 2
- MVME712C Transition Board Installation 2
- Completion and Testing 2

MVME712C Installation for 6-Slot System 4
- Chassis Preparation 4
- MVME712C Transition Board Installation 4
- Completion and Testing 4

MVME712C Installation for 12-Slot Rackmount System 7
- MVME712C Transition Board Installation 7
- Completion and Testing 7

MVME712C Installation for 12-Slot Tower 8
- Chassis Preparation 8
- MVME712C Transition Board Installation 8
- Completion and Testing 8

MVME712C Installation for 20-Slot 9
- Chassis Preparation 9
- MVME712C Transition Board Installation 9
- Completion and Testing 9

MVME712C Installation Instructions

This document supplies the necessary information to install the MVME712C transition board in the Delta Series computer systems.

Additional Documents

- *System Manual*

System Cautions

If there are no available slots in the backpanel, this installation cannot be done.

Upgrade Instructions

System Shutdown

1. Bring the system down as instructed in the System Manual.
2. Turn the AC power off and remove the AC cord from the system.

> **CAUTION**
>
> Inserting/removing modules while power is applied may result in damage to module components.

MVME712C Installation for 3-Slot System

Chassis Preparation

1. Remove the front cover by grasping the corners and pulling the cover off.
2. Remove the top cover by loosening the three screws on the front edge, grasping the front edge, lifting and moving the top back until it is removed. See Figure 1.

MVME712C Transition Board Installation

1. In the rear of the system, remove two filler panels from the appropriate transition board slots.
2. Connect the loose end of the SCSI cable coming from J3 of the P2 adapter to connector J2 on the MVME712C transition board. Make sure that the red, blue or dark grey stripe is facing the top of the board. See Figure 6.
3. Connect the loose end of the Ethernet cable to the MVME712A connector J10. See Figure 5.
4. Install the MVME712C board into the rear panel. Be careful not to crimp the cables just installed. Tighten the top and bottom screws on the board fascia.
5. Install the tee and terminator for the Thinnet connection. See Figure 6.
6. Install the active terminator if there are no SCSI devices to be used.

Completion and Testing

1. Insert the cable cover back into the front of the card cage by sliding the cover underneath the card cage flanges and then down over the lip on the base.

   NOTE: Make sure all cables are not pinched by the cover.
2. Slide the shroud all the way forward until a slight *click* is heard as it locks itself into place.
3. Mark the product code label located on the outside of the rear panel with product code 712KC.
4. Reconnect the AC power cord and turn the system on.

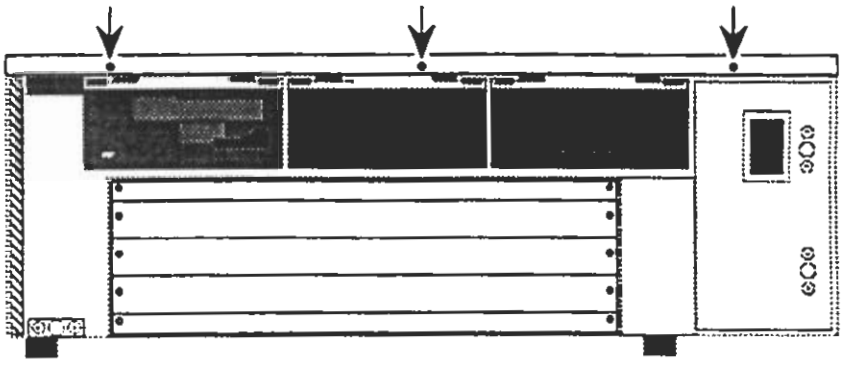


Figure 1. Front Panel

MVME712C Installation for 6-Slot System

Chassis Preparation

1. Remove the front cover by inserting a screwdriver in the front panel hole and turning the screw counter-clockwise. See Figure 2. Pull the top of the front cover forward and lift it away from the system

2. Remove the right side cover by sliding the side forward, then tilting the top away from the system and lifting.

3. Remove the air duct cover plate by loosening the four screws and lifting the plate off. See Figure 3.

4. Remove two filler panels from the appropriate transition board slots.

   NOTE: Other boards in the system may have to be moved to allow space for the new board(s).

MVME712C Transition Board Installation

1. Connect the loose end of the SCSI cable coming from the chassis to the connector on the MVME712C transition board. Make sure that the red, blue or dark grey stripe is facing the top of the board. See Figure 6.

2. Connect the loose end of the Ethernet cable to the MVME712A connector J10. See Figure 5.

3. Install the MVME712C board into the rear panel. Be careful not to crimp the cables just installed. Tighten the top and bottom screws on the board fascia.

4. Install the tee and terminator for the Thinnet connection. See Figure 6.

5. Install the active terminator if there are no SCSI devices to be used.

Completion and Testing

1. Reinstall the air duct cover plate and secure with the four screws. See Figure 3.

2. Reinstall the side cover.

3. Reinstall the front cover and secure the latch by turning the screw in the front panel clockwise until it is snug. See Figure 2.

4. Mark the product code label located on the outside of the rear panel with product code 712KC.

5. Reconnect the AC power cord and turn the system on.

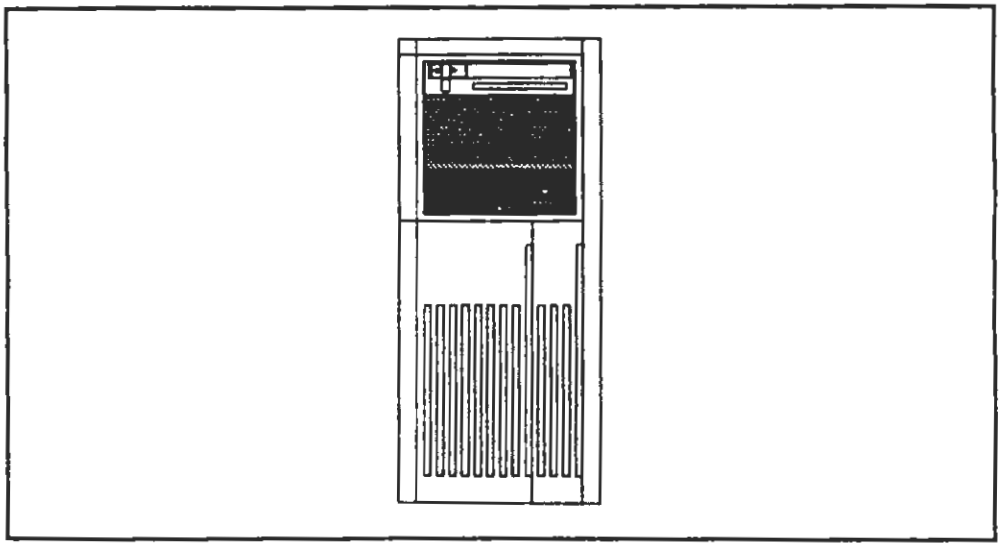


Figure 2. Front Cover

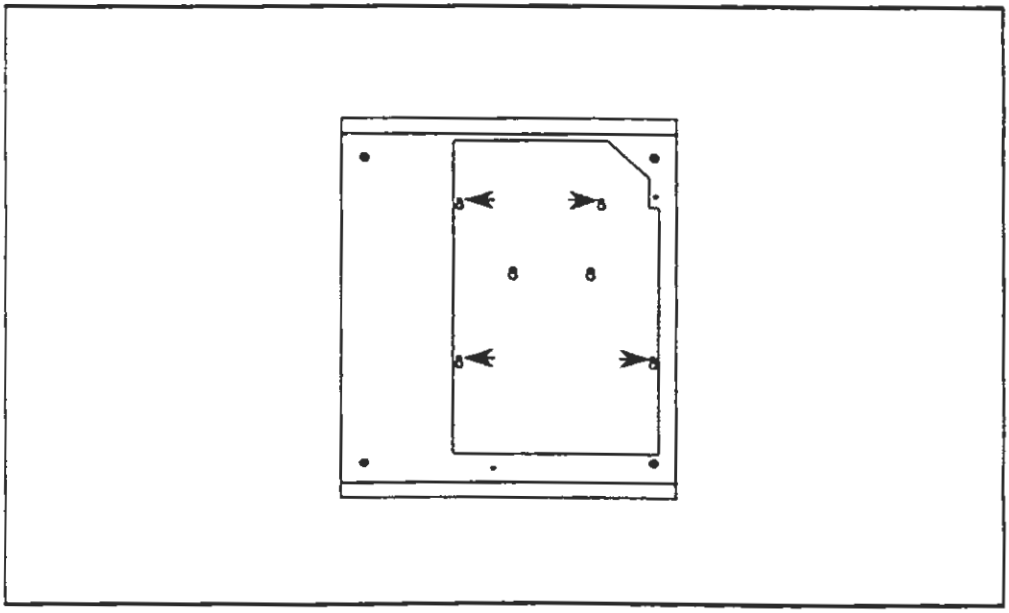


Figure 3. Air Duct Cover Plate

MVME712C Installation for 12-Slot Rackmount System

MVME712C Transition Board Installation

1. In the rear of the system, remove two filler panels from the appropriate transition board slots.
2. Connect the loose end of the SCSI cable coming from the chassis to the connector on the MVME712C transition board. Make sure that the red, blue or dark grey stripe is facing the top of the board. See Figure 6.
3. Connect the loose end of the Ethernet cable to the MVME712A connector J10. See Figure 5.
4. Install the MVME712C board into the rear panel. Be careful not to crimp the cables just installed. Tighten the top and bottom screws on the board fascia.
5. Install the tee and terminator for the Thinnet connection. See Figure 6.
6. Install the active terminator if there are no SCSI devices to be used.

Completion and Testing

1. Mark the product code label located on the outside of the rear panel. Use product code number 712KC.
2. Reconnect the AC power cord and turn the system on.

MVME712C Installation for 12-Slot Tower

Chassis Preparation

1. To remove the shroud, insert a stout instrument (such as a screwdriver) into the slot at the bottom center front of the shroud. Push up the latch release pin and pull the shroud forward until it is removed.

2. Remove the cable cover from the front of the card cage by sliding the cover up then pulling the bottom away from the system and sliding it downward.

MVME712C Transition Board Installation

1. In the rear of the system, remove two filler panels from the appropriate transition board slots.

2. Connect the loose end of the SCSI cable coming from the chassis to the connector on the MVME712C transition board. Make sure that the red, blue or dark grey stripe is facing the top of the board. See Figure 6.

3. Connect the loose end of the Ethernet cable to the MVME712A connector J10. See Figure 5.

4. Install the MVME712C board into the rear panel. Be careful not to crimp the cables just installed. Tighten the top and bottom screws on the board fascia.

5. Install the tee and terminator for the Thinnet connection. See Figure 6.

6. Install the active terminator if there are no SCSI devices to be used.

Completion and Testing

1. Insert the cable cover back into the front of the card cage by sliding the cover underneath the card cage flanges and then down over the lip on the base.

   NOTE: Make sure the cables are not pinched by the cover.

2. Slide the shroud all the way on the system until a slight *click* is heard as it locks itself into place.

3. Mark the product code label located on the outside of the rear panel with product code 712KC.

4. Reconnect the AC power cord and turn the system on.

MVME712C Installation for 20-Slot

Chassis Preparation

1. Remove the front cover and the right cover (as viewed from the front) by grasping the corners and then pulling the covers off.
2. Open the access door on the right side of the chassis (as viewed from the front of the system) by removing the three screws. See Figure 4.

MVME712C Transition Board Installation

1. In the rear of the system, remove two filler panels from the appropriate transition board slots.
2. Connect the loose end of the SCSI cable coming from the chassis to the connector on the MVME712C transition board. Make sure that the red, blue or dark grey stripe is facing the top of the board. See Figure 6.
3. Connect the loose end of the Ethernet cable to the MVME712A connector J10. See Figure 5.
4. Install the MVME712C board into the rear panel. Be careful not to crimp the cables just installed. Tighten the top and bottom screws on the board fascia.
5. Install the tee and terminator for the Thinnet connection. See Figure 6.
6. Install the active terminator if there are no SCSI devices to be used.

Completion and Testing

1. Close the side access door and secure with the three screws that were removed. See Figure 4.
2. Push the side cover into place until a slight *click* is heard as it locks itself into place.
3. Push the front cover into place until a slight *click* is heard as it locks itself into place.
4. Mark the product code label located on the outside of the rear panel with product code 712KC.
5. Reconnect the AC power cord and turn the system on.

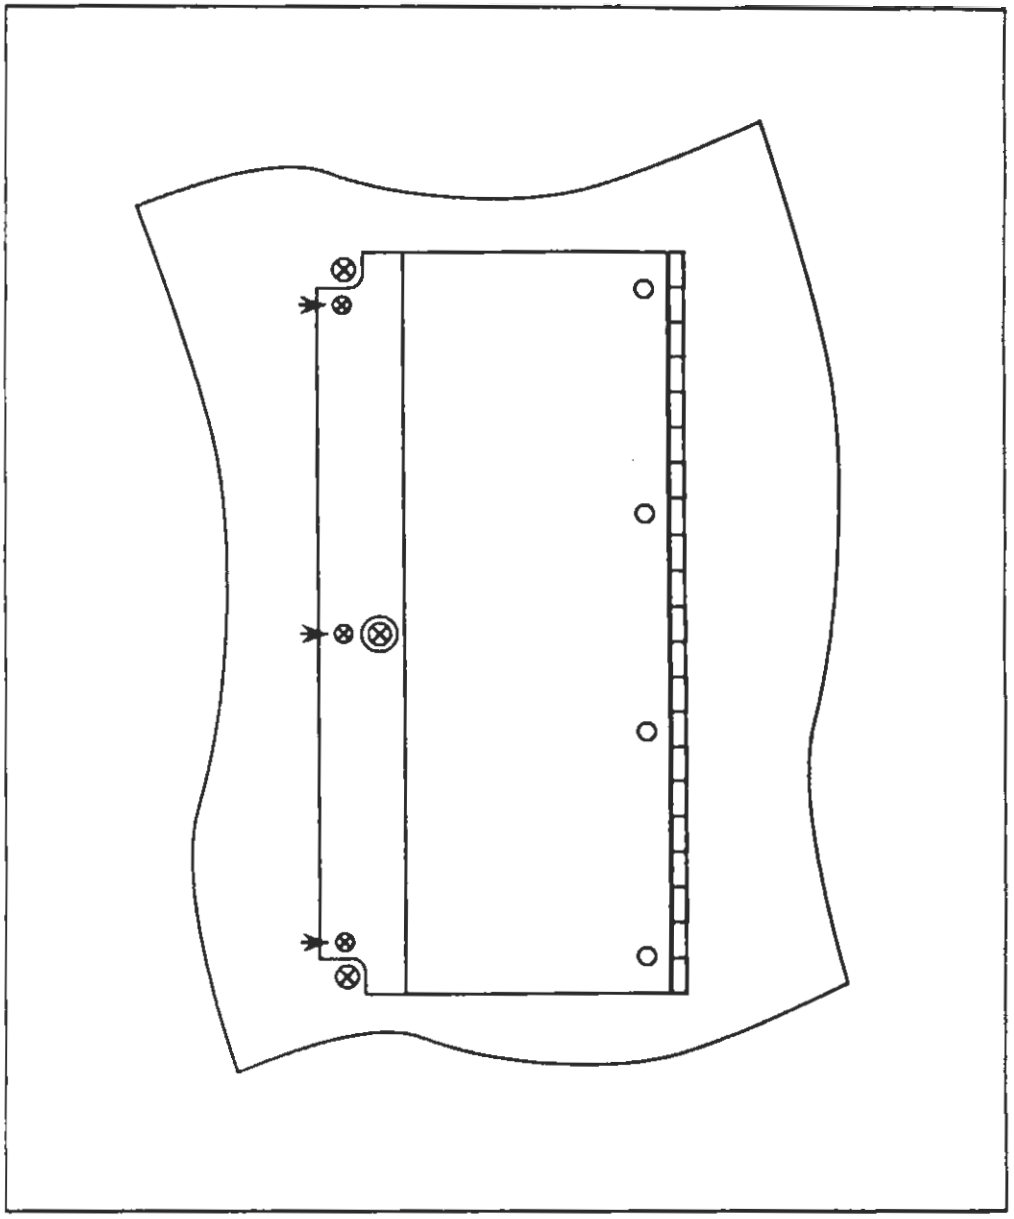


Figure 4. Access Cover

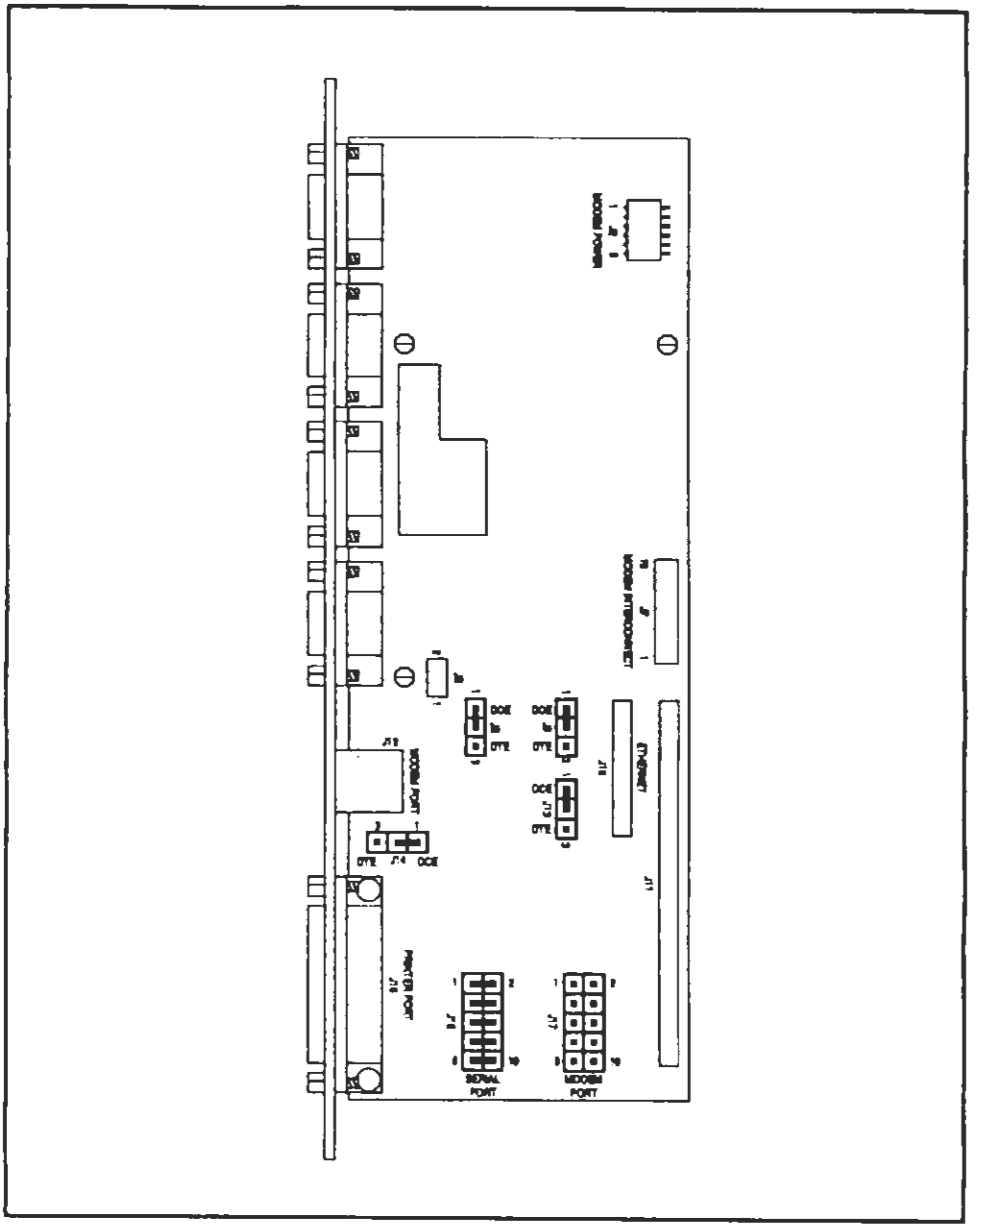


Figure 5. MVME712A

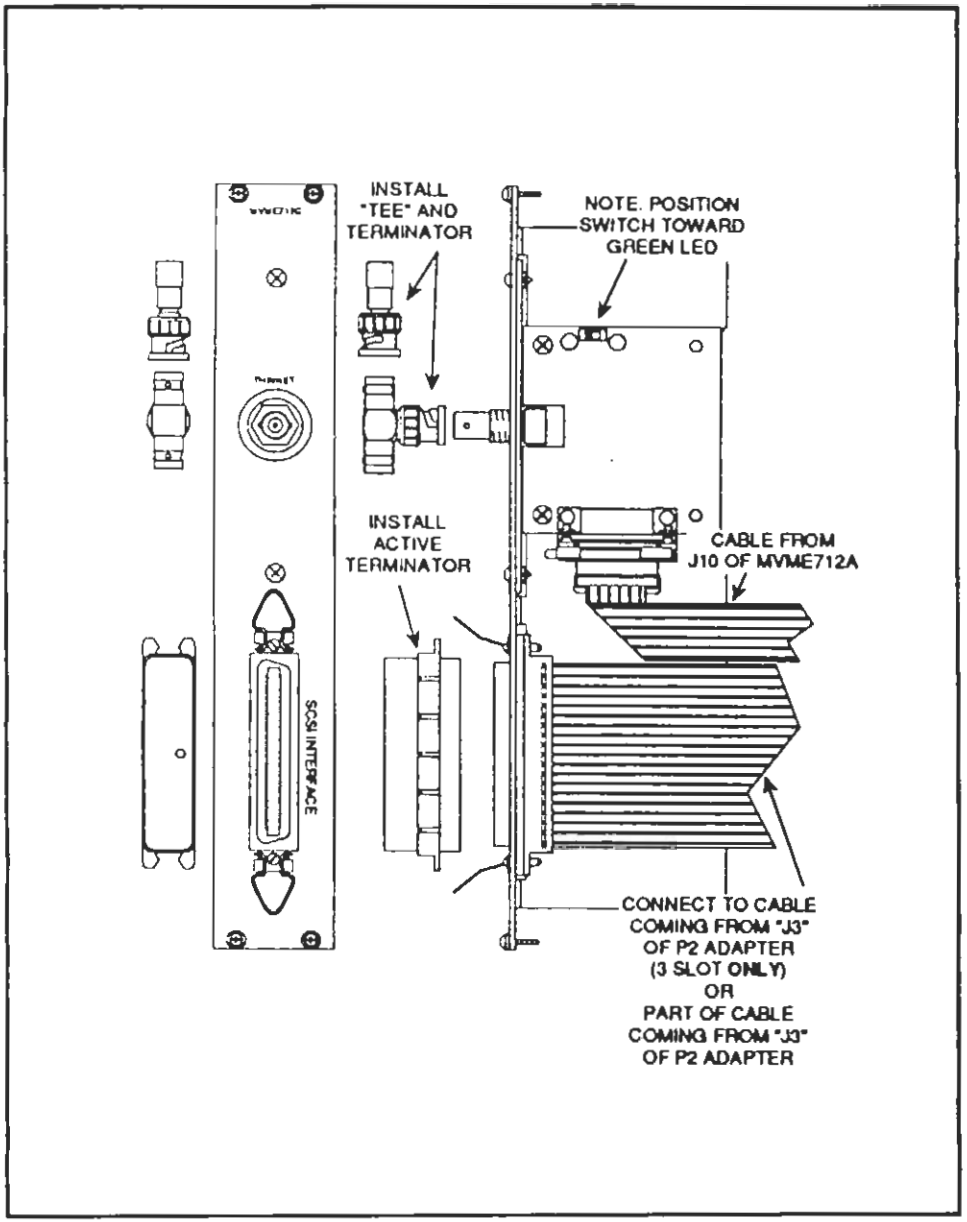


Figure 6. MVME712C Transition Panel

MOTOROLA

Computer Group
2900 South Diablo Way
Tempe, Arizona 85282
P.O. Box 2953
Phoenix, Arizona 85062-2953

To order additional Computer Group literature, contact your local sales office.

To comment on Motorola hardware, software or system products, contact:

Motorola Field Service Operations
Customer Support Center
1-800-551-1016



Motorola is an Equal Employment Opportunity/Affirmative Action Employer

Motorola and M are registered trademarks of Motorola, Inc.



PRINTED IN USA IRONWOOD

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP