

Bently Nevada 3500/60
Temperature Monitor



\$695.00

In Stock

Qty Available: 2

New From Surplus Stock

Open Web Page

<https://www.artisanng.com/78116-10>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com


- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

3500/60 & /61 Temperature Monitors

Bently Nevada™ Asset Condition Monitoring

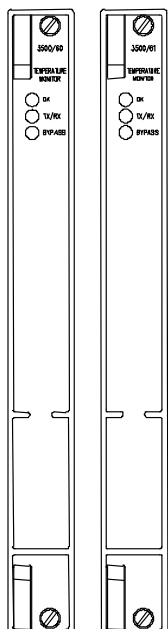

Description

The 3500/60 & 61 modules provide six channels of temperature monitoring and accept both Resistance Temperature Detector (RTD) and Thermocouple (TC) temperature inputs. The modules condition these inputs and compare them against user-programmable alarm setpoints. The 3500/60 and 3500/61 provide identical functionality except that the 3500/61 provides recorder outputs for each of its six channels while the 3500/60 does not.

The user programs the modules to perform either RTD or TC temperature measurements using the 3500 Rack Configuration Software. Different I/O modules are available in RTD/TC non-isolated or TC isolated versions. The user can configure the RTD/TC non-isolated version to accept either TC or RTD, or a mixture of TC and RTD inputs. The TC isolated version provides 250 Vdc of channel-to-channel isolation to protect against external interference.

When used in a Triple Modular Redundant (TMR) configuration, temperature monitors must be installed adjacent to each other in groups of three. When used in this configuration, the system employs two types of voting to ensure accurate operation and to avoid single-point failures.



imagination at work

Specifications and Ordering Information
Part Number 141540-01
Rev. C (03/07)

Page 1 of 10

Specifications

Inputs

Signal

Accepts from 1 to 6 RTD or TC transducer signals.

Input Impedance

Greater than 10 M Ω for each lead input.

Power Consumption

3500/60: Nominal consumption of 7 watts.

3500/61: Nominal consumption of 9 watts.

Transducers

TCs

Type E: -100 °C to +1000 °C,
(-148 °F to +1832 °F).

Type J: 0 °C to +760 °C,
(+32 °F to +1400 °F).

Type K: 0 °C to +1370 °C,
(+32 °F to +2498 °F).

Type T: -160 °C to +400 °C,
(-256 °F to +752 °F).

RTDs

100 Ω 3-wire & 4-wire platinum RTD (alpha = 0.00385):

*-200° C to +850° C
(-328 °F to +1562 °F).

With external barriers:

-50 °C to +850 °C

(-122 °F to +1562 °F).

100 Ω 3-wire & 4-wire platinum RTD (alpha = 0.00392):

* -200 °C to +700 °C

(-328 °F to +1292 °F).

With external barriers:

-50 °C to +850 °C

(-122 °F to +1562 °F).

120 Ω 3-wire & 4-wire nickel RTD:

-80 °C to +260 °C

(-112 °F to +500 °F).

10 Ω 3-wire & 4-wire copper RTD:

*-100 °C to +260 °C,

(-148 °F to +500 °F).

With external barriers:

-50 °C to +850 °C

(-122 °F to +1562 °F).

Note: Platinum RTD's with 0.00385 alphas are the worldwide industrial standard and are recommended for all applications.

* Lower OK limit with external barriers is -50°C.

I/O Modules

Isolated TC I/O modules have 250 Vdc of isolation between channels.

Outputs

Front Panel LEDs

OK LED

Indicates when the Temperature Monitor is operating properly.

TX/RX LED

Indicates then the Temperature Monitor is communicating with other modules in the 3500 rack.

Bypass LED

Specifications and Ordering Information
Part Number 141540-01
Rev. C (03/07)

	Indicates when the Temperature Monitor is in Bypass Mode.		Standard Rack:±3 °C at 25 °C (±5.4 °F at 77 °F).
RTD Current Source Value	925 ±15 µA @ 25° C per transducer (single supply for the 4-wire RTD and two supplies for the 3-wire).	<i>External Termination Non-Isolated:</i>	Bulkhead Rack:±3 °C at 25 °C (±5.4 °F at 77 °F).
Recorder	+4 to +20 mA. Values are proportional to monitor full-scale. Individual recorder values are provided for each channel. Monitor operation is unaffected by short circuits on recorder outputs.	<i>Internal Termination Isolated:</i>	Standard Rack: ±1 °C at 25 °C (±1.8 °F at 77 °F). Bulkhead Rack:±2 °C at 25 °C (±3.6 °F at 77 °F).
Voltage Compliance (current output)	0 to +12 Vdc range across load. Load resistance is 0 to 600 Ω.		Standard Rack:±3 °C at 25 °C ±5.4 °F at 77 °F).
Resolution	0.3662 µA per bit ±0.15% error at room temperature ±0.4% error over temperature range.	<i>External Termination Isolated:</i>	Bulkhead Rack:±1 °C at 25 °C (±1.8 °F at 77 °F).
Signal Conditioning			Standard Rack:±1 °C at 25 °C (±1.8 °F at 77 °F).
	Note: Specified at +25 °C (+77 °F) unless otherwise noted.		
	Full-scale range for each channel is set in the field via 3500 Configuration Software. No calibration is required.	10Ω Copper RTDs	
RTDs and TCs (except for 10Ω Copper RTDs)		Resolution	1°C or 1 °F
Resolution	1 °C or 1 °F	Accuracy	±3 °C at 25 °C (±5.4 °F at 77 °F).
Accuracy		Cold Junction Compensation Sensor (used for TC measurements)	
<i>Internal Termination Non-Isolated</i>	Bulkhead Rack ±3 °C at 25 °C (±5.4 °F at 77 °F).	Accuracy	±1° C at 25 °C

(±1.8 °F at 77 °F).

Alarms

Alarm Setpoints

The user can set Alert and Danger setpoints for the value measured by the monitor using software configuration. Alarms are adjustable from 0 to 100% of full-scale for each measured value. The exception is when the full-scale range exceeds the range of the sensor. In this case, the range of the sensor will limit the setpoint. Accuracy of alarms are to within 0.13% of the desired value. The Temperature Monitors have both under and over alarm setpoints.

Alarm Time Delays

The user can program alarm delays using software as follows:

Alert

From 1 to 60 seconds in 1 second intervals.

Danger

From 1 to 60 seconds in 0.5 second intervals or can be set to the minimum alarm delay.

Number of actual channel(s)	Minimum time delay (mS)
1	225
2	300
3	375
4	450
5	525
6	600

Note: 225 ms alarm time delays will not be available for all channels. As more channels are used the alarm time delay increases. The configuration software will

indicate the minimum alarm time delay based on the channel loading.

Proportional Values

Proportional values are temperature measurements used to monitor the machine. The Temperature Monitors return temperature proportional values.

Environmental Limits

Operating Temperature

-30 °C to +65 °C (-22 °F to +150 °F) when used with Internal/External Termination I/O Modules

0 °C to +65 °C (32 °F to +150 °F) when used with Internal Barrier I/O Modules (Internal Termination).

Storage Temperature

-40 °C to +85 °C (-40 °F to +185 °F).

CE Mark Directives

Declaration of Conformity

134036

EMC Directives

IEC/EN61000-6-4

Radiated Emissions

EN 55011, Class A

Conducted Emissions

EN 55011, Class A

IEC/EN61000-6-2

Electrostatic Discharge

EN 61000-4-2, Criteria B

Radiated Susceptibility

EN61000-4-3, Criteria A

Conducted Susceptibility

EN61000-4-6, Criteria A

Specifications and Ordering Information
Part Number 141540-01
Rev. C (03/07)

Radiated Susceptibility		T4 @ Ta = -20 °C to +65 °C (-4 °F to +150 °F)
ENV 50140, Criteria A		
Conducted Susceptibility	<i>Certification Number</i>	
ENV 50141, Criteria A		
Electrical Fast Transient		CSA 1389797 (LR 26744-211)
EN 61000-4-4, Criteria B		
Surge Capability		When used with I/O module ordering options with internal barriers:
EN 61000-4-5, Criteria B		A/Ex nC[ia] IIC
Magnetic Field		Class I, Zone 2/(0)
EN 61000-4-8, Criteria A		Class I, Div I, Groups A,B,C,D
Power Supply Dip		T4 @ Ta = -20 °C to +65 °C (-4 °F to +150 °F)
EN 61000-4-11, Criteria B		
Radio Telephone		
ENV 50204, Criteria B	<i>Certification Number</i>	
Low Voltage Directives		CSA 1389797 (LR 26744-211)

IEC/EN61010-1

Safety Requirements

Hazardous Area Approvals

CSA/NRTL/C

**Approval Option
(01)**

Class I, Div 2
Groups A, B, C, D
T4 @ Ta = -30 °C to +65 °C
(-22 °F to +150 °F)

*Certification
number*

150268-1002151 (LR 26744)

**Approval Option
(02)**

**When used with I/O module
ordering options without
internal barriers:**

A/Ex nC[L] IIC
Class I, Zone 2
Class I, Div 2, Groups A,B,C,D

ATEX

**Approval Option
(02)**

**For Selected Ordering Options
with ATEX/CSA agency
approvals:**

 II 3/(3) G

Ex nCAL[L] IIC

T4 @ Ta = -20 °C to +65 °C
(-4 °F to +150 °F)

*Certification
number*

LCIE 04 ATEX 6161X

Note: When used with Internal Barrier I/O
Module, refer to specification sheet
141495-01 for approvals information.

Physical Monitor Module

Specifications and Ordering Information
Part Number 141540-01
Rev. C (03/07)

**Dimensions
(Height x Width
x Depth)**

241.3 mm x 24.4 mm x 241.8 mm
(9.50 in x 0.96 in x 9.52 in).

Weight

0.91 kg (2.0 lbs.).

I/O Modules

**Dimensions
(Height x Width
x Depth)**

241.3 mm x 24.4 mm x 99.1 mm
(9.50 in x 0.96 in x 3.90 in).

Weight

0.45 kg (1.0 lbs.).

**Internal Barrier
I/O Module**

**Dimensions
(Height x Width
x Depth)**

241.3 mm x 24.4 mm x 163.1 mm
(9.50 in x 0.96 in x 6.42 in).

Weight

0.46 kg (1.01 lbs.).

Rack Space Requirements

Monitor Module

1 full-height front slot.

I/O Modules

1 full-height rear slot.

Ordering Considerations

General

If the 3500/60 or 3500/61 is added to an existing 3500 System the following firmware and software versions (or later) are required:

3500/20 Module Firmware – Revision G

3500/01 Software – Version 2.00

3500/02 Software – Version 2.00

3500/03 Software – Version 1.10

Note: External Termination Blocks cannot be used with Internal Termination I/O modules.

When ordering I/O Modules with External Terminations the External Termination Blocks and Cables must be ordered separately.

**Internal Barrier
I/O Module**

Consult the 3500 Internal Barrier specification sheet (part number 141495-01) if the Internal Barrier Option is selected.

Ordering Information

No Recorder Outputs

3500/60-AXX-BXX

A: I/O Module Type

- 01** RTD/TC Non-isolated with Internal Terminations
- 02** RTD/TC Non-isolated with External Terminations
- 03** TC Isolated with Internal Terminations
- 04** TC Isolated with External Terminations
- 05** RTD/TC Non-isolated with Internal Barriers and Internal Terminations

B: Agency Approval Option

- 00** None
- 01** CSA/NRTL/C (Class 1, Div 2)
- 02** ATEX/CSA (Class 1, Zone 2)

Note: Agency Approval Option B 02 is only available with Ordering Option A 05.

Recorder Outputs

3500/61-AXX-BXX

A: I/O Module Type

- 01** RTD/TC Non-isolated with Internal Terminations
- 02** RTD/TC Non-isolated with External Terminations
- 03** TC Isolated with Internal Terminations

Specifications and Ordering Information
Part Number 141540-01
Rev. C (03/07)

- 0 4** TC Isolated with External Terminations
- 0 5** RTD/TC Non-isolated with Internal Barriers and Internal Terminations

B: Agency Approval Option

- 0 0** None
 - 0 1** CSA/NRTL/C (Class 1, Div 2)
 - 0 2** ATEX/CSA (Class 1, Zone 2)
- Note:** Agency Approval Option B 02 is only available with Ordering Options A 01, A 03, and A 05.

External Termination Blocks

133908-01

RTD/TC Non-Isolated External Termination Block (Terminal Strip connectors).

133916-01

RTD/TC Non-Isolated External Termination Block (Euro Style connectors).

133924-01

TC Isolated External Termination Block (Terminal Strip connectors).

133932-01

TC Isolated External Termination Block (Euro Style connectors).

133892-01

3300/61 Recorder Output External Termination Block (Terminal Strip connectors).

133900-01

3300/61 Recorder Output External Termination Block (Euro Style connectors).

Cables

3500/60 and 3500/61 Transducer (XDCR) Signal to External Termination (ET) Block Cable

134544-AXXXX-BXX

A: Cable Length

- 0 0 0 5** 5 feet (1.5 metres)
- 0 0 0 7** 7 feet (2.1 metres)
- 0 0 1 0** 10 feet (3.0 metres)
- 0 0 2 5** 25 feet (7.5 metres)
- 0 0 5 0** 50 feet (15 metres)
- 0 1 0 0** 100 feet (30.5 metres)

B: Assembly Instructions

- 0 1** Not assembled
- 0 2** Assembled

3500/61 Recorder Output to External Termination (ET) Block Cable

134543- AXX – BXX

A: Cable Length

- 0 0 0 5** 5 feet (1.5 metres)
- 0 0 0 7** 7 feet (2.1 metres)
- 0 0 1 0** 10 feet (3.0 metres)
- 0 0 2 5** 25 feet (7.5 metres)
- 0 0 5 0** 50 feet (15 metres)
- 0 1 0 0** 100 feet (30.5 metres)

B: Assembly Instructions

- 0 1** Not assembled
- 0 2** Assembled

Spares

Shared components

133908-01

RTD/TC Non-Isolated External Termination Block (Terminal Strip connectors).

133916-01

RTD/TC Non-Isolated External Termination Block (Euro Style connectors).

133924-01

TC Isolated External Termination Block (Terminal Strip connectors).

133932-01

TC Isolated External Termination Block (Euro Style connectors).

00580442

Connector Header, Internal Termination, 9-position, Green.

00580443

Connector Header, Internal Termination, 12-position, Green.

00502133


Connector Header, Internal Termination, 12-position, Blue.

00580444

Specifications and Ordering Information
Part Number 141540-01
Rev. C (03/07)


04425545	Connector Header, Internal Termination, 15-position, Green.	3500/61-Specific	
		133811-02	3500/61 Monitor (Replaced by PN 163179-02).
	Grounding Wrist Strap (single use).	135343-01	Firmware IC
	IC Removal Tool.	133819-02	3500/61 RTD/TC Non-Isolated I/O Module Internal Terminations.
134542-01	3500/60 & 3500/61 Manual.	133827-02	3500/61 RTD/TC Non-Isolated I/O Module External Terminations.
3500/60-Specific		133835-02	3500/61 TC Isolated I/O Module Internal Terminations.
133811-01	3500/60 Monitor (Replaced by PN 163179-01).	133843-02	3500/61 TC Isolated I/O Module External Terminations.
135344-01	Firmware IC.	133892-01	3500/61 Recorder Output External Termination Block (Terminal Strip connectors).
133819-01	3500/60 RTD/TC Non-Isolated I/O Module Internal Terminations.	133900-01	3500/61 Recorder Output External Termination Block (Euro Style connectors).
133827-01	3500/60 RTD/TC Non-Isolated I/O Module External Terminations.	136711-02	3500/61 RTD/TC I/O Module with Internal Barriers and Internal Terminations. (Not-Isolated)
133835-01	3500/60 TC Isolated I/O Module Internal Terminations.		
133843-01	3500/60 TC Isolated I/O Module External Terminations.		
136711-01	3500/60 RTD/TC I/O Module with Internal Barriers and Internal Terminations. (Not-Isolated)		

Figures and Tables

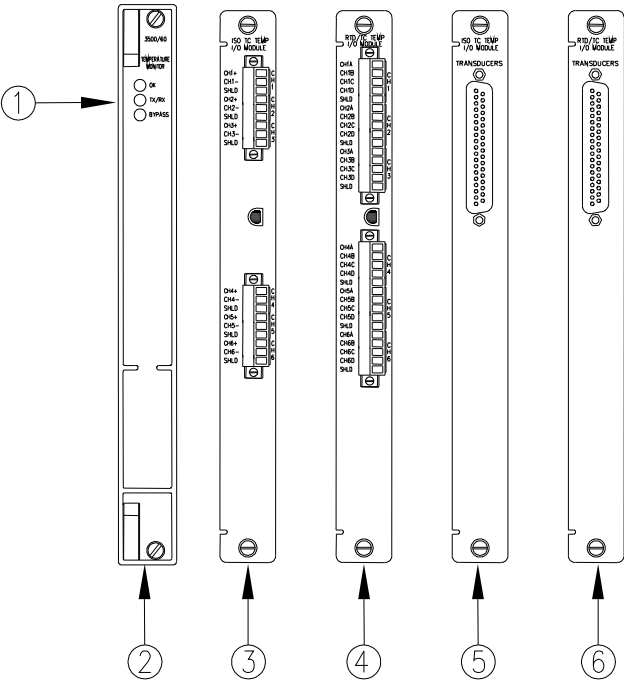

- 1) Status LEDs
 - 2) 3500/60 Main Module Front View
 - 3) ISO TC Temp I/O Module (Internal Terminations)
 - 4) RTD/TC Temp I/O Module (Internal Terminations)
 - 5) ISO TC Temp I/O Module (External Terminations)
 - 6) RTD/TC Temp I/O Module (External Terminations)
- (No Recorder Outputs)

Figure 1: Front and rear views of the 3500/60 Temperature Monitor

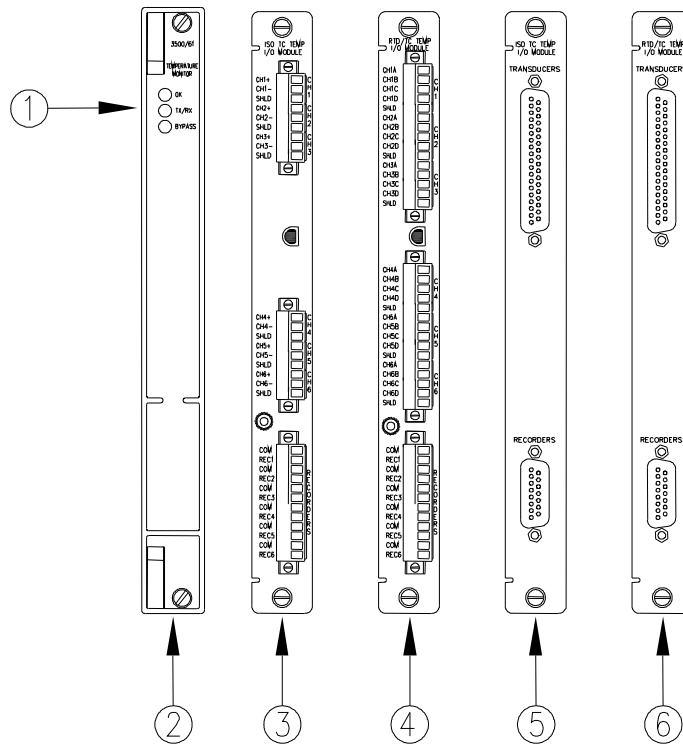

- 1) Status LEDs
 - 2) 3500/61 Main Module Front View
 - 3) ISO TC Temp I/O Module (Internal Terminations)
 - 4) RTD/TC Temp I/O Module (Internal Terminations)
 - 5) ISO TC Temp I/O Module (External Terminations)
 - 6) RTD/TC Temp I/O Module (External Terminations)
- (Recorder Outputs)

Figure 2: Front and rear views of the 3500/61 Temperature Monitor

Copyright 1999. Bently Nevada, LLC.
 1631 Bently Parkway South, Minden, Nevada USA 89423
 Phone: 775.782.3611 Fax: 775.215.2873
www.ge-energy.com/bently
 All rights reserved.

Bently Nevada is a trademark of General Electric Company.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanTG.com | [artisanTG.com](https://www.artisanTG.com)

