

ARTISAN®
TECHNOLOGY GROUP

Your **definitive** source for quality pre-owned equipment.

**Artisan Technology Group**
(217) 352-9330 | sales@artisantg.com | artisantg.com

**Full-service, independent repair center**
with experienced engineers and technicians on staff.

**We buy your excess, underutilized, and idle equipment**
along with credit for buybacks and trade-ins.

**Custom engineering**
so your equipment works exactly as you specify.

- Critical and expedited services
- In stock / Ready-to-ship
- Leasing / Rentals / Demos
- ITAR-certified secure asset solutions

**Expert team | Trust guarantee | 100% satisfaction**

All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the *National Instruments PXIe-5668* at our website: ***Click HERE***


*For user manuals and dimensional drawings, visit the product page resources tab on ni.com.*

*Last Revised: 2014-11-06 07:14:57.0*

# 26.5 GHz RF High-Performance Vector Signal Analyzer and Spectrum Analyzer

## PXIe-5668R





- 20 Hz to 26.5 GHz frequency range
- 320 MHz instantaneous bandwidth <3.6 GHz
- 765 MHz instantaneous bandwidth from >3.6 GHz
- -129 dBc/Hz typical phase noise at 10 kHz offset at 800 MHz
- ±0.35 dB typical flatness within 100 MHz IF filter
- ±0.1 dB typical amplitude accuracy
- Selectable preamp <3.6 GHz
- Selectable preselector (YTF) >3.6 GHz
- -166 dBm/Hz typical display averaged noise floor at 1 GHz
- 12-bit analog-to-digital converter at 2 GS/s
- User-programmable FPGA using LabVIEW

### Overview

The PXIe-5668R vector signal analyzer (VSA) offers 765 MHz of bandwidth with best-in-class measurement performance and speed. This high-performance microwave signal analyzer meets the challenging requirements of applications such as wireless communications, radio frequency integrated circuit (RFIC) characterization, Radio Detection And Ranging (RADAR) test, and spectrum monitoring/signal intelligence.

The VSA features a unique combination of RF measurement performance, measurement speed, and flexibility. With industry-leading dynamic range and bandwidth, this instrument is an ideal solution for the challenging measurement requirements of R&D applications. With its implementation as a PXI instrument, the PXIe-5668R also provides the fast measurement speed needed for high-volume manufacturing test. Finally, this VSA includes a LabVIEW-programmable Xilinx Kintex-7 FPGA that you can use to customize the instrument's behavior by adding triggering or signal processing routines.

Back to Top

### Application and Technology

You can use the PXIe-5668R as either a spectrum analyzer or vector signal analyzer with LabVIEW or LabWindows™/CVI software. In addition, you can use it with the Modulation Toolkit and Spectral Measurements Toolkit for LabVIEW to analyze custom and standard modulation formats.

When combined with NI or third-party analysis toolkits, the PXIe-5668R can perform measurements for a broad range of communications standards such as GSM/EDGE, UMTS/HSPA+, WCDMA, LTE/LTE-Advanced, Bluetooth, 802.11a/b/g/n/p/ac, DVB-C/H/T, and ATSC. In addition, the combination of LabVIEW analysis software and wide bandwidth helps you accurately perform pulse measurements for radar applications.

| Measurement | PXIe-5661 | PXIe-5663 | PXIe-5665 | PXIe-5668R |
|---|---|---|---|---|
| **Frequency Range** | 9 kHz to 2.7 GHz | 10 MHz to 6.6 GHz | 20 Hz to 3.6 GHz/14 GHz | 20 Hz to 14/26.5 GHz |
| **Phase Noise** | -90 dBc/Hz at 10 kHz offset from a 1 GHz carrier | -105 dBc/Hz at 10 kHz offset from a 1 GHz carrier | -129 dBc/Hz at 10 kHz offset from an 800 MHz carrier | -129 dBc/Hz at 10 kHz offset from an 800 MHz carrier |
| **Architecture** | Multistage | Single stage | Multistage | Multistage |
| **List Mode** | No | Yes | Yes | No |
| **Peer-to-Peer Streaming** | No | Yes | Yes | Yes |
| **Absolute Amplitude Accuracy** | ±0.6 dB | ±0.65 dB | ± 0.1 dB | ± 0.1 dB |
| **Average Noise Floor @ 1 GHz** | -122 dBm/Hz | -158 dBm/Hz | -165 dBm/Hz | -166 dBm/Hz |
| **Bandwidth** | 20 MHz | 50 MHz | 25/50 MHz | 80/200/765 MHz |

*Table 1. Comparison of NI Vector Signal Analyzers*

## RF Measurement Performance

The PXIe-5668R is a PXI fast Fourier transform (FFT)-based signal analyzer suitable for both high-end spectrum analysis and vector signal analysis. The combination of low phase noise, low noise floor, and high second- and third-order intercepts provides excellent dynamic range for applications ranging from adjacent channel leakage ratio (ACLR) measurements to spurs and harmonics measurements. Table 2 illustrates the typical performance of the PXIe-5668R at center frequencies of 1 GHz and 20 GHz.

| Measurement | 1 GHz | 20 GHz |
|---|---|---|
| Noise Floor (RMS) Without Preamplifier<br>Noise Floor (RMS) With Preamplifier | -154 dBm/Hz<br>-166 dBm/Hz | -152 dBm/Hz<br>— |
| IP3 Without YIG Tuned Filter<br>IP3 With YIG Tuned Filter | +23 dBm<br>— | +24 dBm<br>+28 dBm |
| Second Harmonic Intercept | +67 dBm | N/A |
| Image Rejection | -105 dBc | -83 dBc |
| Phase Noise at 10 kHz Offset | -129 dBc/Hz | -116 dBc/Hz |
| Instantaneous Bandwidth | 320 MHz | 765 MHz |

*Table 2. Typical PXIe-5668R Performance*

The PXIe-5668R achieves extremely wide instantaneous bandwidth using its 2 GS/s digitizer. As Table 2 shows, the instrument features 320 MHz of instantaneous bandwidth below center frequencies of 3.6 GHz and up to 765 MHz of instantaneous bandwidth at center frequencies from 3.6 GHz to 26.5 GHz.

## Dynamic Range

The superior dynamic range performance of the PXIe-5668R gives it the ability to accurately perform measurements ranging from intermodulation distortion (IMD) to adjacent channel power (ACP) to error vector magnitude (EVM). In figures 1 and 2, the instrument's dynamic range chart illustrates both noise and linearity as a function of mixer level.

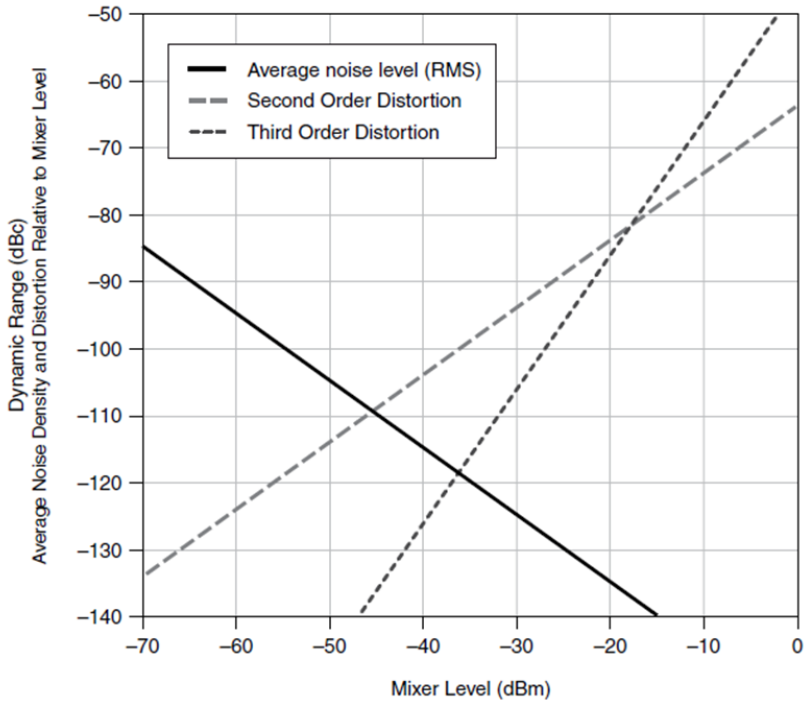



*Figure 1. PXIe-5668R Dynamic Range Chart at 1 GHz, Preamplifier Disabled (Nominal)*

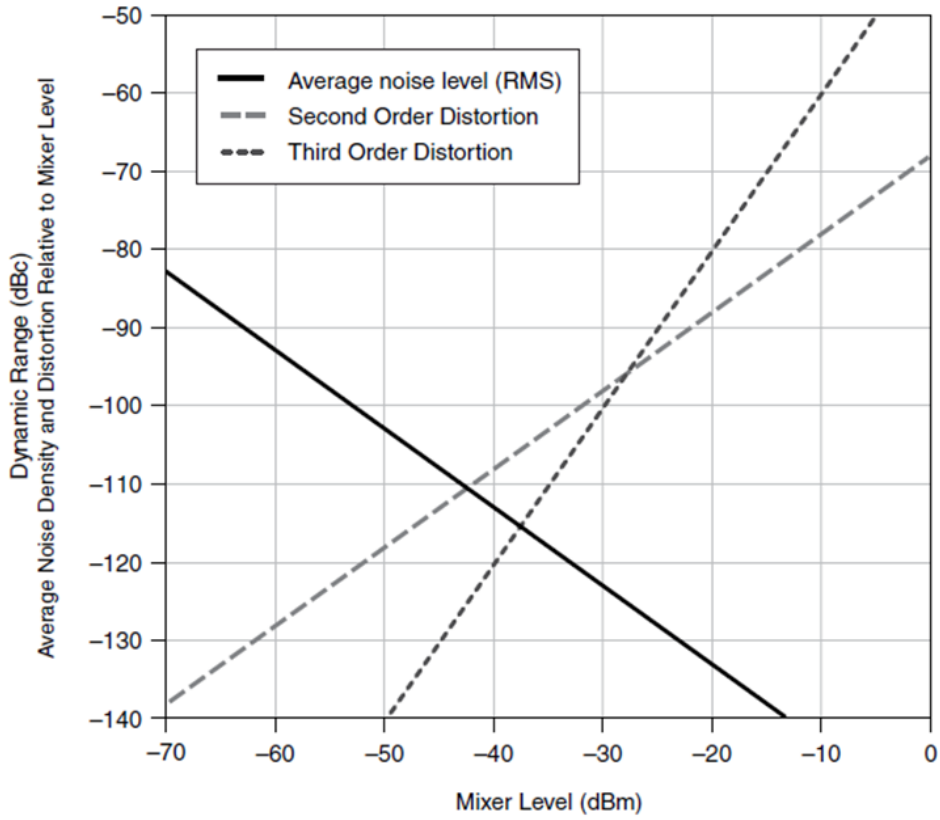



*Figure 2. PXIe-5668R Dynamic Range Chart at 20 GHz, YTF Enabled (Nominal)*

In Figure 1, note that the optimal mixer level for most measurements is approximately -36 dBm, where the instrument delivers approximately 119 dB of spurious-free dynamic range (SFDR) in a 1 Hz bandwidth. At 20 GHz (Figure 2), the PXIe-5668R achieves similar performance with an optimal mixer level of -37 dBm. At this mixer level, the instrument achieves 115 dB of SFDR in 1 Hz of bandwidth.

A combination of accurate linearity and noise floor is critical when measuring IMD and ACP. In fact, the specification that best represents the ability of an instrument to perform these measurements is third-order intercept (TOI). The PXIe-5668R has a TOI specification of better than +23 dBm at 1 GHz with 0 dB of attenuation. As Figure 3 illustrates, the instrument delivers nominal TOI performance of +25 dBm at 1 GHz, 2 dB better than specification.

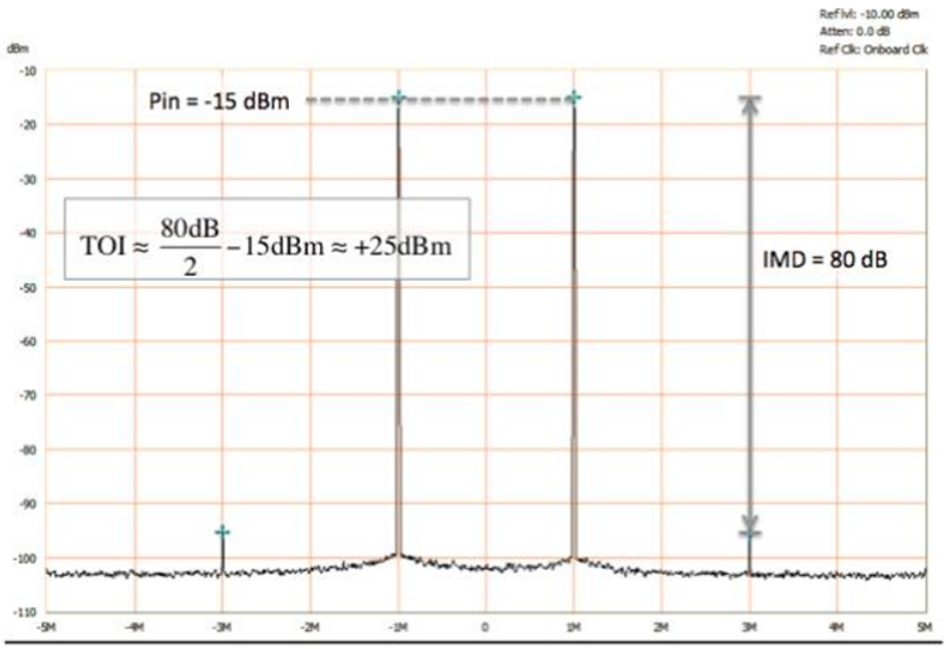



*Figure 3. PXIe-5668R Intermodulation Distortion Measurements*

Although the TOI specification of an RF signal analyzer is defined using 0 dB of attenuation by convention, an RF signal analyzer can measure TOI much higher than its specification. In practice, you can optimize measurement system linearity by switching up to 75 dB of internal attenuation on the PXIe-5668R.

In addition to IMD measurements, the high dynamic range of the PXIe-5668R makes it ideal for spectrum measurements such as ACP and ACLR. Figure 4 illustrates an ACLR measurement of a WCDMA signal and shows an inherent ACLR floor of approximately 85 dB.

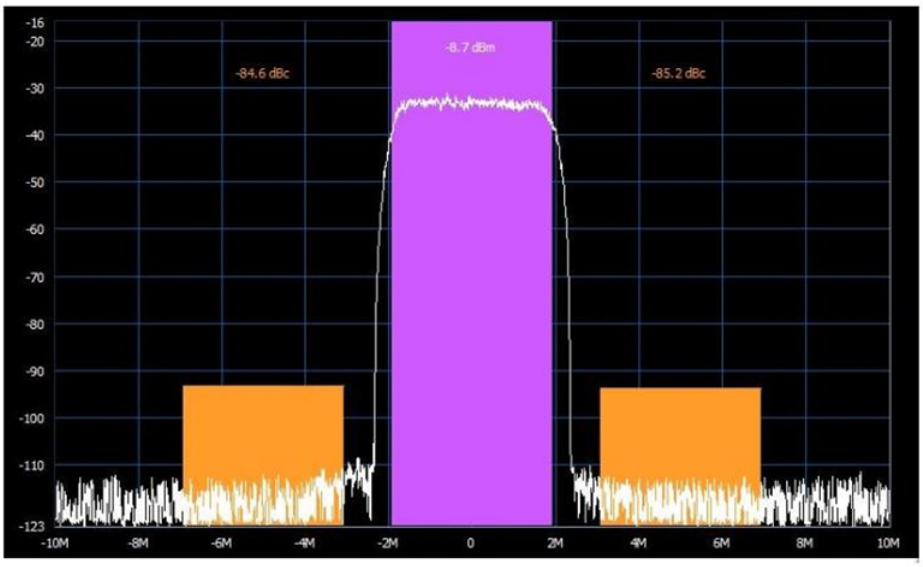



*Figure 4. PXIe-5668R WCDMA ACLR Performance at 468 MHz*

You can use NI wireless standard software toolkits with the PXIe-5668R to make UMTS ACLR measurements as well as test devices using technologies including GSM/EDGE, UMTS/HSPA+, LTE/LTE-Advanced, Bluetooth, and 802.11a/b/g/n/p/ac.

## Wide Instantaneous Bandwidth

The PXIe-5668R supports an instantaneous bandwidth of 320 MHz or 765 MHz, depending on frequency range. The ability to measure extremely wide bandwidths in a single acquisition is useful for applications ranging from wireless communications test to radar pulse measurements. When you are measuring wideband signals with metrics such as EVM, make sure that the instantaneous bandwidth of the RF signal analyzer is greater than the bandwidth of the signal. For example, wireless technologies such as the IEEE 802.11ac standard require an instantaneous bandwidth of 160 MHz to perform an EVM measurement. In addition, the spectrum mask requirements for a 160 MHz 802.11ac signal include limits that are ±240 MHz from the center frequency for a total of 480 MHz of bandwidth. With 765 MHz of instantaneous bandwidth, the PXIe-5668R can perform measurements such as a 160 MHz spectrum mask in a single acquisition.
Additional applications such as RADAR pulse measurements also require extremely wide instantaneous bandwidth. In a typical RADAR pulse, the frequency domain characteristics of the signal appear as a sync function containing both a main lobe and theoretically infinite side lobes as shown in Figure 5.

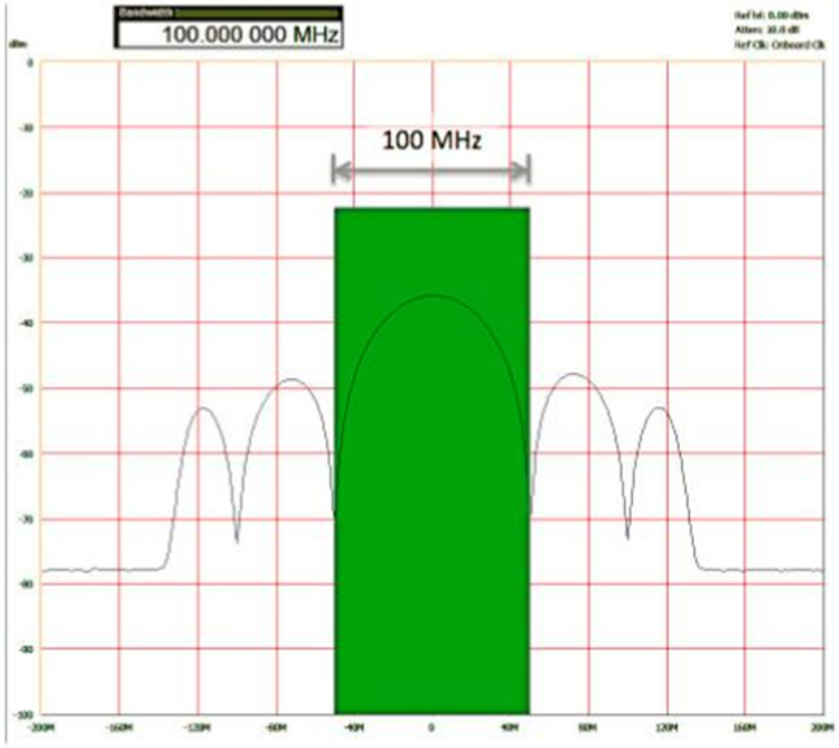



*Figure 5. The Main Power Lobe of a 20 ns Pulse Contained Within a Bandwidth of 100 MHz*

RADAR pulse measurements, such as pulse rise time, require a VSA to capture both the main lobe and several side lobes. A general rule for measuring the pulse rise time of X nanoseconds is that the instrument's instantaneous bandwidth must be 3/X. For example, to measure pulse rise times as low as 5 ns, the required instrument instantaneous bandwidth would be 3/(5 ns) or 600 MHz. In Figure 6, notice that the wide bandwidth of the PXIe-5668R signal analyzer enables extremely accurate pulse rise time measurements—in this case showing a rise time of 8 ns.

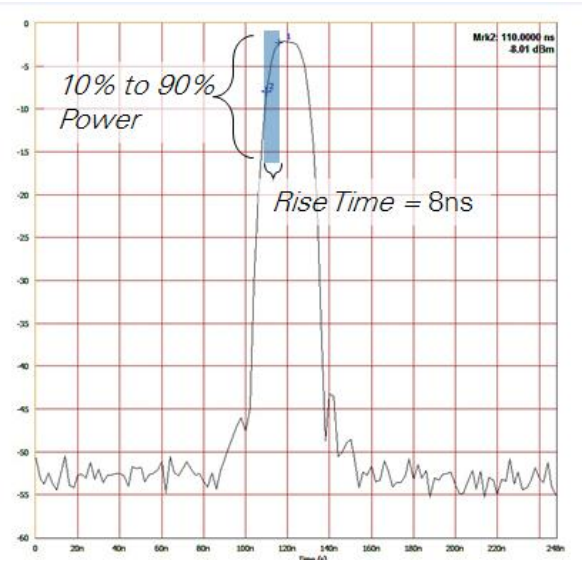



*Figure 6. Time Domain of a 20 ns Pulse Using Zero Span Mode*

Although the extremely wide bandwidth of the PXIe-5668R is ideal for performing accurate pulse measurements, the wide instantaneous bandwidth also allows faster spectrum measurements in scenarios where the span is smaller than the instantaneous bandwidth of the instrument.

## Flexibility

Another key attribute of the PXIe-5668R RF signal analyzer is the flexibility with which you can reconfigure it. Because the VSA is a LabVIEW FPGA programmable target, you can embed custom signal processing algorithms on the instrument itself. For example, using LabVIEW example code, you can configure the instrument as a real-time spectrum analyzer (RTSA). As shown in Figure 7, with the RTSA personality, you can analyze extremely wide bandwidths of spectrum in real time without gaps in the time-domain record.

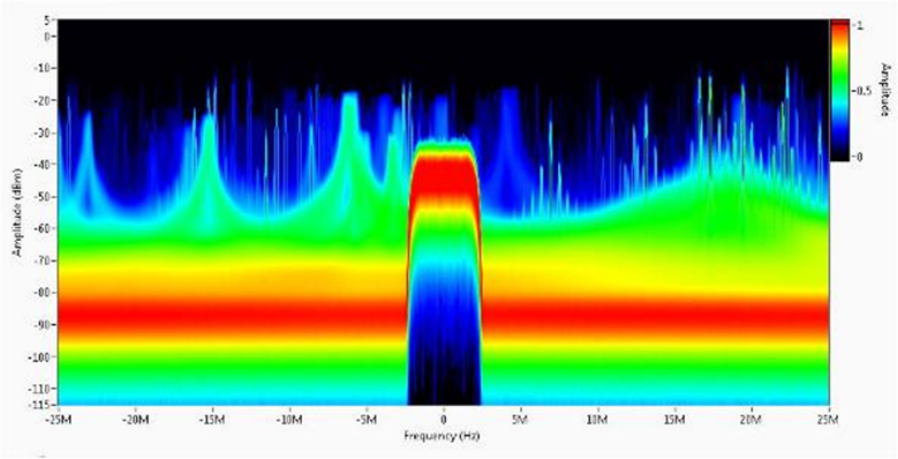



*Figure 7. The real-time spectrum analysis capability of the PXIe-5668R enables unique visualization tools such as the persistence display.*

Finally, as a result of this instrument's modular architecture, additional downconverter and digitizer modules support multichannel receiver configurations. The PXIe-5668R VSA provides the ability to share the local oscillator and other timing signals across multiple modules and allows for phase coherence between each RF channel. The phase coherence of multichannel receivers is important in applications ranging from direction finding to beamforming and multiple input, multiple output device testing. Figure 8 shows an example configuration of a 2-channel RF signal analyzer.

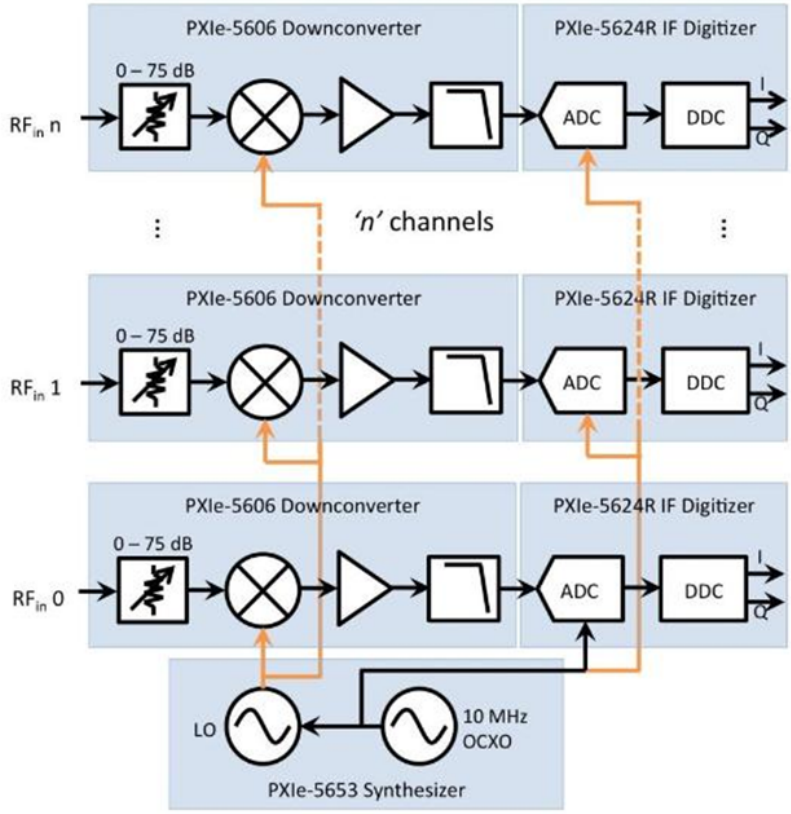



*Figure 8. You can configure multiple PXIe-5668R instruments for multichannel, phase-coherent RF signal acquisition.*

With the configuration shown in Figure 8, you can achieve tight channel-to-channel synchronization in multichannel measurement applications.

## Fast Measurement Speed

Using software-defined measurements in the LabVIEW graphical development environment with the PXIe-5668R, you can perform common spectrum and demodulation measurements 3X to 10X faster than traditional instruments. For example, you can perform a 100 MHz spectrum capture in 2 ms with a PXIe-8135 embedded controller (100 kHz RBW). Though actual performance is system dependent, Figure 9 shows the relationship between measurement time and span (Hz).

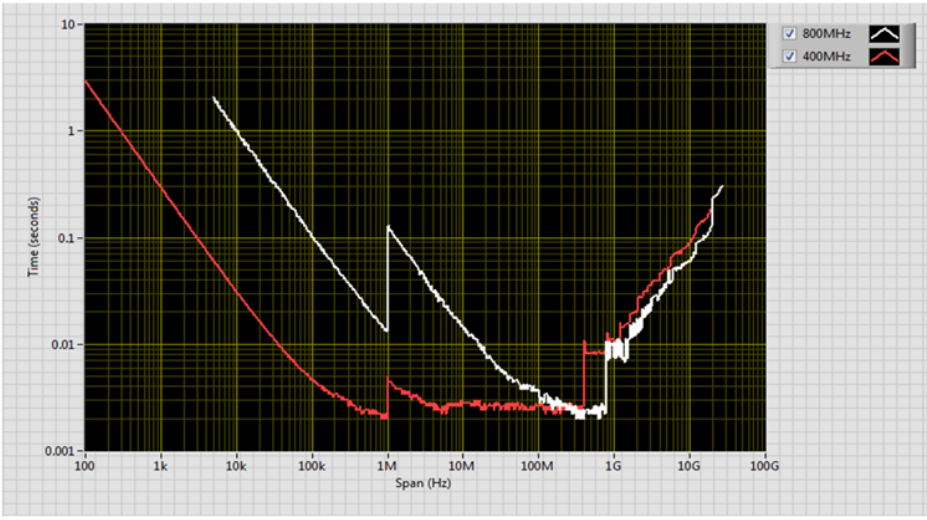



*Figure 9. PXIe-5668R Measurement Speed for 320 MHz and 765 MHz Bandwidth Settings With Respect to Span (Hz)*

## Flexible Software

You can interface the PXIe-5668R with a variety of software experiences including interactive soft front panels and multiple programming APIs.

The NI-RFmx API offers the simplest programming experience for automating RF measurements. With NI-RFmx, you can reduce test system development time by simplifying complex RF measurement programming. It delivers industry-leading measurement speed and provides higher throughput capabilities than box instruments. Now you can control parallelism instead of trying to work around the inflexibility of traditional box instruments.

One of the biggest benefits of the NI-RFmx API is the breadth of ready-to-run LabVIEW examples. These examples not only demonstrate the simplicity of the API but also enable you to quickly get started on your automated RF test application. Figure 10 features a simple LabVIEW example showing an ACP measurement.

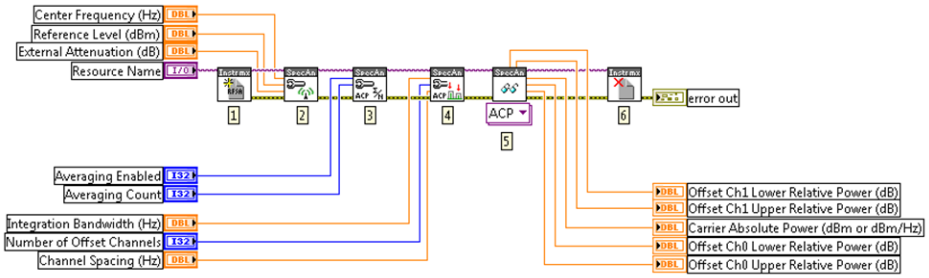



*Figure 10. LabVIEW Example for an ACP Measurement*

In addition to programming APIs for automated measurements, you can use the NI-RFSA Soft Front Panel (SFP) for interactive measurements. The SFP mimics the look and feel of traditional instruments and helps you perform basic measurements without programming. Figure 11 shows an ACP measurement performed in the NI-RFSA SFP.

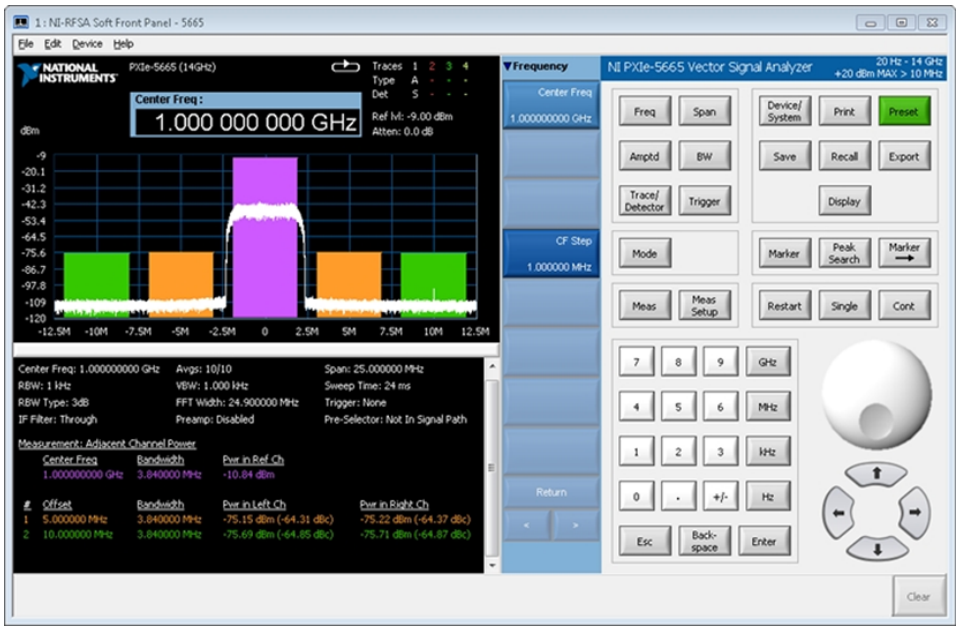



*Figure 11. NI-RFSA SFP Showing an ACP Measurement*

## Architecture

The PXIe-5668R uses two distinct signal paths to deliver a combination of wide instantaneous bandwidth and best-in-class RF performance. In the low-band path, below 3.6 GHz, the instrument uses a three-stage superheterodyne design with optional preamplification. In the high-band path, above 3.6 GHz, the instrument uses a two-stage design with a selectable yttrium-iron-garnet (YIG)-tuned filter (YTF) for preselection.

In the low band of the PXIe-5668R (3.6 GHz shown in Figure 12), the instrument contains several features to improve measurement performance. Figure 12 highlights a simplified block diagram. Note that you can engage the 30 dB preamplifier to reduce the instrument's inherent noise floor when measuring low-level signals.

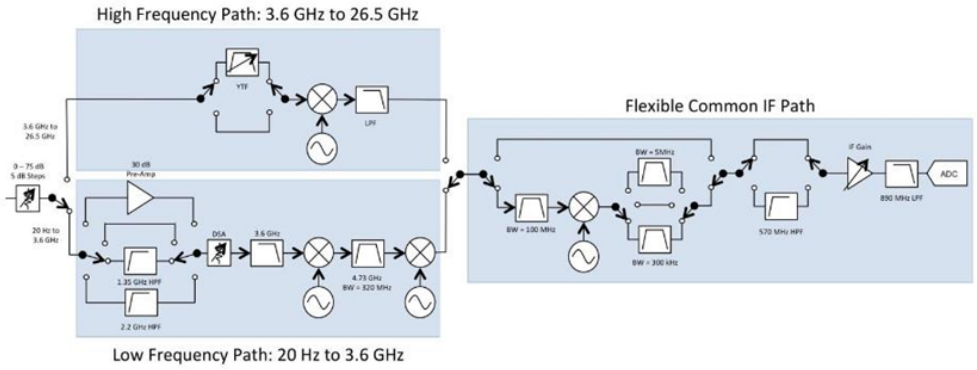



*Figure 12. Simplified Block Diagram of the PXIe-5668R*

Figure 12 also illustrates two highpass filters before the first mixing stage. You can engage these filters with a highpass cutoff of 1,350 MHz and 2,200 MHz to suppress the fundamental frequency of common cellular communications bands around 1 GHz. With filters enabled, the instrument can more accurately measure low-level second and third harmonics at approximately 2 GHz and 3 GHz, respectively.

In the high band, above 3.6 GHz, a YTF functions as a preselector for operation from 3.6 GHz to 26.5 GHz, which is enabled by default for spectrum measurements. For extremely wideband vector signal analysis, you can disable the YTF to use the full 765 MHz of instantaneous bandwidth.

## Flexible IF Structure

Used with a 2 GS/s digitizer sample rate, the VSA's downconverter has a flexible IF structure that allows both high-end spectrum analysis and wideband vector signal analysis. For example, you can engage a narrow 300 kHz analog filter to facilitate measurements requiring the highest dynamic range, such as two-tone IMD or ACLR. For vector signal analysis, you can disable the IF filtering entirely to allow for bandwidths of up to either 320 MHz or 765 MHz, depending on the center frequency.

The PXIe-5624R digitizer's wideband analog front end is optimized for superheterodyne receiver architectures. It features an onboard digital downconverter which filters, decimates, and shifts complex IF signals to baseband data centered at 0 Hz. As a result, you can use the PXIe-5624R either as part of the PXIe-5668R VSA or as a stand-alone IF digitizer.

## Summary

The PXIe-5668R is a high-performance 26.5 GHz VSA that is ideal for a wide range of applications. The combination of superior analog performance, extremely wide bandwidth, and ultimate flexibility empowers you to solve challenging measurement applications ranging from ACLR measurements to RADAR verification to spectrum monitoring.

Find more information on the PXIe-5668R at ni.com/microwave.

Back to Top

---

## Support and Services

### System Assurance Programs

NI system assurance programs are designed to make it even easier for you to own an NI system. These programs include configuration and deployment services for your NI PXI, CompactRIO, or Compact FieldPoint system. The NI Basic System Assurance Program provides a simple integration test and ensures that your system is delivered completely assembled in one box. When you configure your system with the NI Standard System Assurance Program, you can select from available NI system driver sets and application development environments to create customized, reorderable software configurations. Your system arrives fully assembled and tested in one box with your software preinstalled. When you order your system with the standard program, you also receive system-specific documentation including a bill of materials, an integration test report, a recommended maintenance plan, and frequently asked question documents. Finally, the standard program reduces the total cost of owning an NI system by providing three years of warranty coverage and calibration service. Use the online product advisors at ni.com/advisor to find a system assurance program to meet your needs.

### Calibration

NI measurement hardware is calibrated to ensure measurement accuracy and verify that the device meets its published specifications. To ensure the ongoing accuracy of your measurement hardware, NI offers basic or detailed recalibration service that provides ongoing ISO 9001 audit compliance and confidence in your measurements. To learn more about NI calibration services or to locate a qualified service center near you, contact your local sales office or visit ni.com/calibration.

### Technical Support

Get answers to your technical questions using the following National Instruments resources.

- **Support** - Visit ni.com/support to access the NI KnowledgeBase, example programs, and tutorials or to contact our applications engineers who are located in NI sales offices around the world and speak the local language.
- **Discussion Forums** - Visit forums.ni.com for a diverse set of discussion boards on topics you care about.
- **Online Community** - Visit community.ni.com to find, contribute, or collaborate on customer-contributed technical content with users like you.

### Repair

While you may never need your hardware repaired, NI understands that unexpected events may lead to necessary repairs. NI offers repair services performed by highly trained technicians who quickly return your device with the guarantee that it will perform to factory specifications. For more information, visit ni.com/repair.

### Training and Certifications

The NI training and certification program delivers the fastest, most certain route to increased proficiency and productivity using NI software and hardware. Training builds the skills to more efficiently develop robust, maintainable applications, while certification validates your knowledge and ability.

- **Classroom training in cities worldwide** - the most comprehensive hands-on training taught by engineers.
- **On-site training at your facility** - an excellent option to train multiple employees at the same time.
- **Online instructor-led training** - lower-cost, remote training if classroom or on-site courses are not possible.
- **Course kits** - lowest-cost, self-paced training that you can use as reference guides.
- **Training memberships** and training credits - to buy now and schedule training later.

Visit ni.com/training for more information.

### Extended Warranty

NI offers options for extending the standard product warranty to meet the life-cycle requirements of your project. In addition, because NI understands that your requirements may change, the extended warranty is flexible in length and easily renewed. For more information, visit ni.com/warranty.

### OEM

NI offers design-in consulting and product integration assistance if you need NI products for OEM applications. For information about special pricing and services for OEM customers, visit ni.com/oem.

### Alliance

Our Professional Services Team is comprised of NI applications engineers, NI Consulting Services, and a worldwide National Instruments Alliance Partner program of more than 700 independent consultants and integrators. Services range from start-up assistance to turnkey system integration. Visit ni.com/alliance.

Back to Top

---

©2014 National Instruments. All rights reserved. CVI, LabVIEW, National Instruments, NI, ni.com, and NI FlexRIO are trademarks of National Instruments. The mark LabWindows is used under a license from Microsoft Corporation. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other product and company names listed are trademarks or trade names of their respective companies.

**Artisan Technology Group** is an independent supplier of quality pre-owned equipment

## Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

## We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

## Learn more!

Visit us at **artisantg.com** for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisantg.com | artisantg.com

ARTISAN® TECHNOLOGY GROUP