

Tensolite 601

0.141 Semi-Flex Cable



\$35.00

In Stock

Qty Available: 10+

Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/77541-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group


(217) 352-9330 | sales@artisanng.com | artisanng.com

- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

TENSOLITE CABLE DATA SHEET

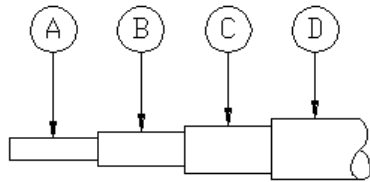

CABLE CODE: 601
 CATEGORY: SEMI-FLEX(R)
 DESCRIPTION: .141 RIGID TYPE
 IMPEDANCE: 50 OHMS
 MAX. OD: 0.141 INCHES
 MAX. OPERATING FREQ.: 18 GHz.
 CUT OFF FREQ.: 34.4 GHz.
 CLAMP CABLE GROUP: N/A
 SOLDER CABLE GROUP: 601, 976
 CRIMP CABLE GROUP: N/A
 MIL SPEC: N/A
 FLORIDA PART X REF.: N/A

ITEM	MATERIAL	SIZE
A. CENTER CONDUCTOR	SILVER PLATED COPPER CLAD STEEL	0.036
B. DIELECTRIC:	SOLID PTFE	0.117
C. OUTER BRAID:	COPPER / POLYESTER FOIL	0.127
D. JACKET:	TIN FILLED HIGH STRENGTH WIRE BRAID	0.139

MECHANICAL CHARACTERISTICS:

OUTER CONDUCTOR INTEGRITY: 60 POUNDS MINIMUM AXIAL PULL
 MINIMUM BEND RADIUS (ONE TIME): 0.19 INCHES FIXED INSTALLATION
 PREFERRED BEND RADIUS: 0.50 INCHES
 TEMPERATURE RANGE: -50 / +200 DEGREES CELSIUS
 WEIGHT MAXIMUM: 0.030 POUNDS PER FOOT



ELECTRICAL CHARACTERISTICS:

CENTER CONDUCTOR DC RESISTANCE 1.20 OHMS / 100 FEET NOMINAL
 OUTER CONDUCTOR DC RESISTANCE 0.08 OHMS / 100 FEET NOMINAL
 NOMINAL IMPEDANCE: 50 OHMS
 NOMINAL CAPACITANCE: 28.7 pf / FT.
 NOMINAL INDUCTANCE: 0.072 uh / FT
 NOMINAL VELOCITY OF PROPAGATION: 70.7 %
 NOMINAL DELAY: 1.44 nS / FT.
 MAXIMUM OPERATING VOLTAGE: 2627 VRMS
 MAXIMUM CW POWER RATING: 88 WATTS AT 18 GHz
 MAXIMUM RETURN LOSS: -22 dB AT 18 GHz
 MAXIMUM INSERTION LOSS: 73.0 dB / 100 FT AT 18 GHz
 NOMINAL INSERTION LOSS: 68.8 dB / 100 FT AT 18 GHz

To calculate maximum insertion loss at any frequency use the formula below:

11.719 times square root of freq. + 1.292 times freq. + 0 = dB/100'
 RELATIVE SHIELDING: -100 dB DOUBLE SHIELDED

FEATURES: SEMI-RIGID REPLACEMENT CABLE. MEETS VW1 REQUIREMENTS PER AWM 10245.
 EASILY FORMS INTO DESIRED SHAPE AND MAINTAINS ELECTRICAL PERFORMANCE

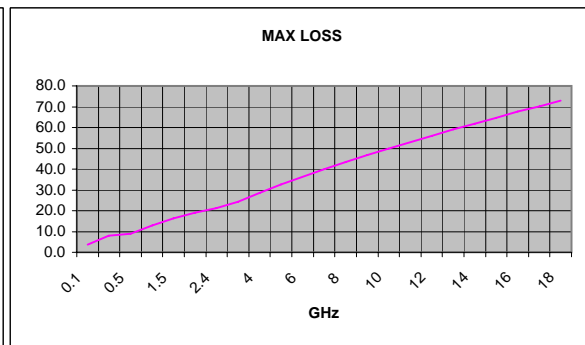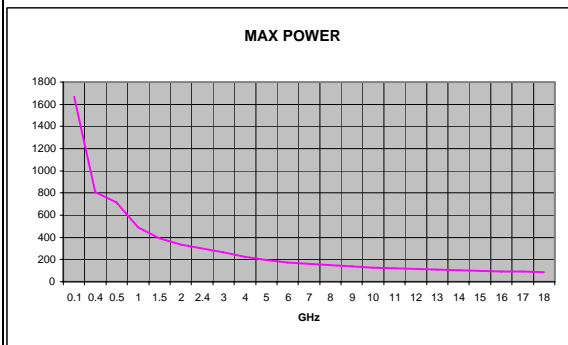

Data subject to change

Copyright 1996 / 2001 Tensolite Co.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisan^{tg}.com](https://www.artisantg.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisan^{tg}.com | [artisan^{tg}.com](https://www.artisantg.com)

