

Solid State Relay



© Artisan Technology Group

Limited Availability
Used and in Excellent Condition

Open Web Page

<https://www.artisanng.com/86737-1>

All trademarks, brandnames, and brands appearing herein are the property of their respective owners.



Your **definitive** source
for quality pre-owned
equipment.

Artisan Technology Group

(217) 352-9330 | sales@artisanng.com | artisanng.com


- Critical and expedited services
- In stock / Ready-to-ship

- We buy your excess, underutilized, and idle equipment
- Full-service, independent repair center

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

SSDA/SSAA RSDD

MODELS

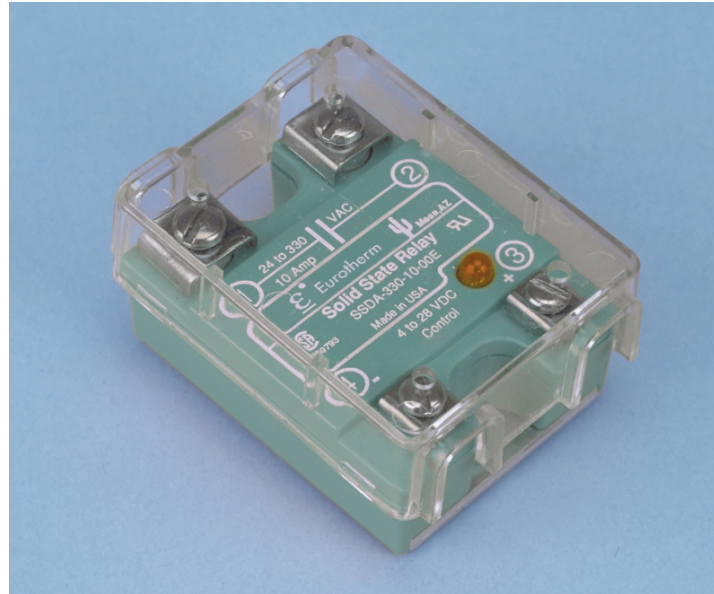

Solid State Relays



- **Heavy duty solid state relays for superior performance in industrial applications**
- **No moving parts, no parts to wear out**
- **Capable of switching up to 75 amps**
- **Zero crossing control**
- **High surge capability**
- **Photo isolation**
- **100% tested at rated current**
- **Capable of switching 5-10 times per second**
- **Compatible with most temperature controllers, logic systems, PLCs, or similar control circuits**
- **Activated by a Vdc or Vac signal**
- **Made in the USA**

The Eurotherm Solid State Relay (SSR) products offer a superior method of switching power to resistive heaters, lamps, alarm devices, small motors, and other similar applications. Available in a wide variety of amperage sizes, the SSRs can be cycled as fast as the mating controller requests without any wear or degradation in the expected life of the relay. For some heater applications, fast cycling of the SSR actually causes a dramatic increase in the life of the heater due to a reduction in the thermal expansion and contraction of the heater.

Heatsinks

All SSR products generate heat based upon the amperage of the applications. Eurotherm has a range of heatsinks which are sized for your application. In addition, we can provide a technical note which can help you size your own heatsink for custom applications or unique installations.

Safety

The SSRs for AC switching include a clear plastic cover in order to provide IP-20 (finger safe) protection. The DC switching SSRs have this cover as an option if needed. The SSRs are built to meet international safety standards including CE regulations.

Support

The SSRs are sold and supported by a team of factory-trained Eurotherm representatives and distributors throughout the world. Please contact us for further information or application assistance.



**EUROTHERM
CONTROLS**

**SSDA/SSAA
RSDD
Solid State
Relays**

Technical Specifications

SSDA models

Output switched	10, 25, 40, or 75Amps at 24-330Vac 50Amps at 48-660 VAC
LDC input models	>4-28Vdc = "on" <1Vdc = "off"
LED Diagnostics	Red LED = requested to turn "on"
Safety Cover	Included

SSAA models

Output switched	10, 25, 40, or 75A at 24-330 Vac 50Amps at 48-660 VAC
HAC input models	90-280Vac = "on" <20Vac = "off"
LED Diagnostics	Red LED = requested to turn "on"
Safety cover	Included

RSDD models


Output switched	8, 12, 20, or 40A at 1-100Vdc
LDC input models	4-28 Vdc = "on" <1Vdc = "off"

Heatsinks	Part Number	Size
For <20A SSRs	HEATSK/A/2.1	4.0H x 4.5W x 1.03D"
For <39A SSRs	HEATSK/B/1.5	3.0H x 4.75W x 2.63D"
For <76A SSRs	HEAT SK/B/1.0	5.5H x 4.75W x 2.63D"

Safety Covers	Part Number
For RSDD or as spares	COVER/SAFETY/000

Product /	Max / Amps	Max / Volts	Input /	Features
SSDA	10A 25A 40A 50A 75A	330Vac or 660VAC	LDC	Cover
SSAA	10A 25A 40A 50A 75A	330Vac or 660VAC	HAC	Cover
RSDD	8A 12A 20A 40A	100Vdc	LDC	—

Typical Installations

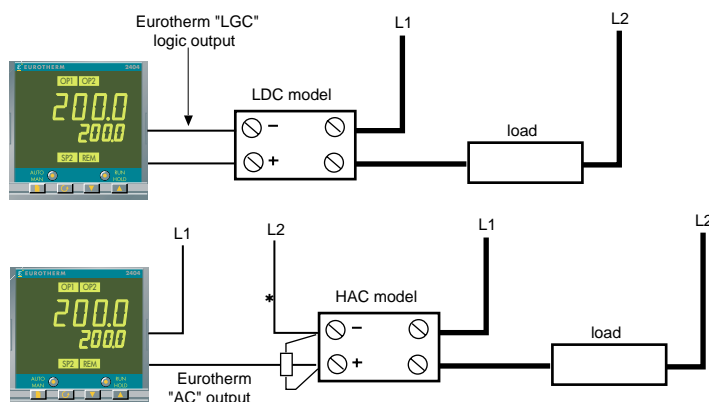

* For triac outputs, a 4K, 8 watt loading resistor is required to ensure turn off.

EUROTHERM CONTROLS INC

11485 Sunset Hills Road
Reston, Virginia 20190-5286
Phone: 703-471-4870
Fax: 703-787-3436
BBS: 703-787-3444
Fax-On-Demand service: 703-787-3441
<http://www.eurotherm.com>

A Siebe Group Company


© Copyright Eurotherm Controls Inc 1999
All rights strictly reserved. No part of this document may be stored in a retrieval system, or any form or by any means without prior written permission from Eurotherm Controls Inc. Every effort has been taken to ensure the accuracy of this specification. However, in order to maintain our technological lead we are continuously improving our products which could, without notice, result in amendments or omissions to this specification. We cannot accept responsibility for damage, injury, loss or expenses resulting therefrom.

PLC is a trademark of Allen-Bradley. Series 2000™ is a trademark of Eurotherm Controls Inc. Dow 340™ is a trademark of Dow Chemical.




For more information, contact your local representative:

Derating Curves

10 Amp and 25 Amp

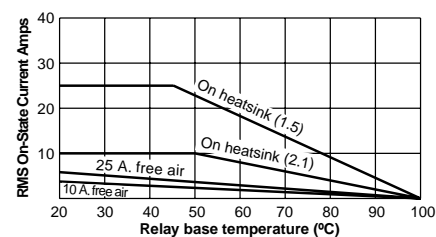

40 Amp and 75 Amp

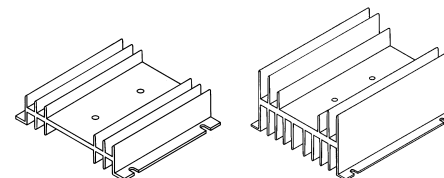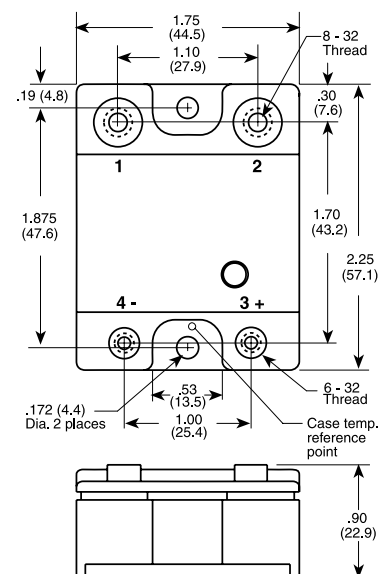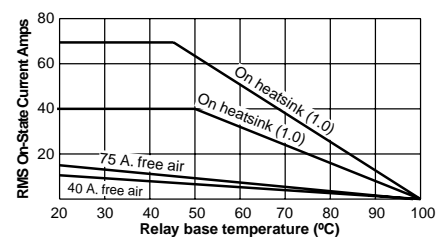

Heatsink "A" Heatsink "B"

Note: The SS and RS products must use a suitable heatsink and thermal transfer compound (DOW 340™ or equivalent) to perform properly. A mounting torque of 10 in. lbs. is required.

Artisan Technology Group is an independent supplier of quality pre-owned equipment

Gold-standard solutions

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

Learn more!

Visit us at [artisanTG.com](https://www.artisanTG.com) for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today?

(217) 352-9330 | sales@artisanTG.com | [artisanTG.com](https://www.artisanTG.com)

